

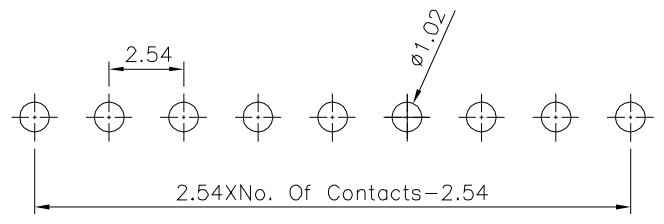
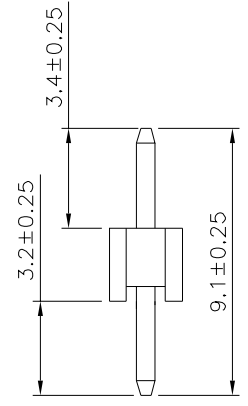


SPECIFICATION

Current Rating:3 Amps
 Withstanding Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 ⚠ Contact:Brass,Gold Flash Over All,Over Nickel
 RoHS Compliant

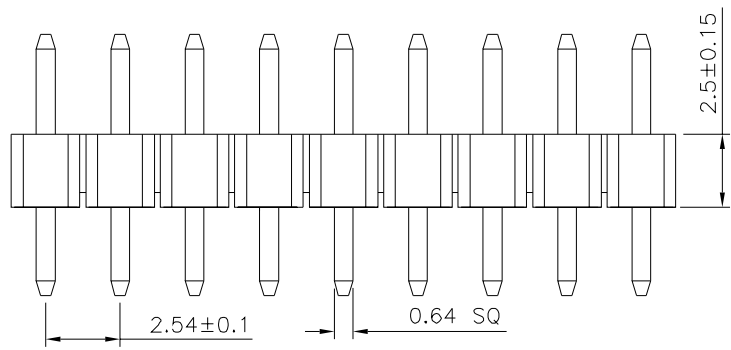

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance ± 0.05)

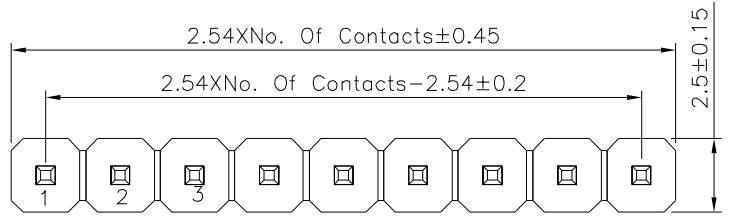

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY MEI	
21852		CHECKED BY HZF	
SCALE NONE		DRAWING BY CYP	
REV. A1		UNIT mm	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
X.	± 0.25	X.*	$\pm 2^{\circ}$
.X	± 0.20	.X*	$\pm 1.5^{\circ}$
.XX	± 0.15	.XX*	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX*	$\pm 0.5^{\circ}$
NO.	REV.	REVISIONS	DATE
⚠ A1		Modify Data	HZF 06/05/2020
⚠ A0		NEW RELEASE	HZF 02/28/2020