
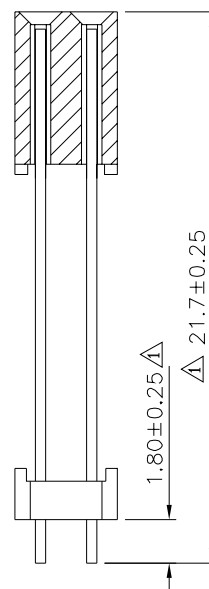
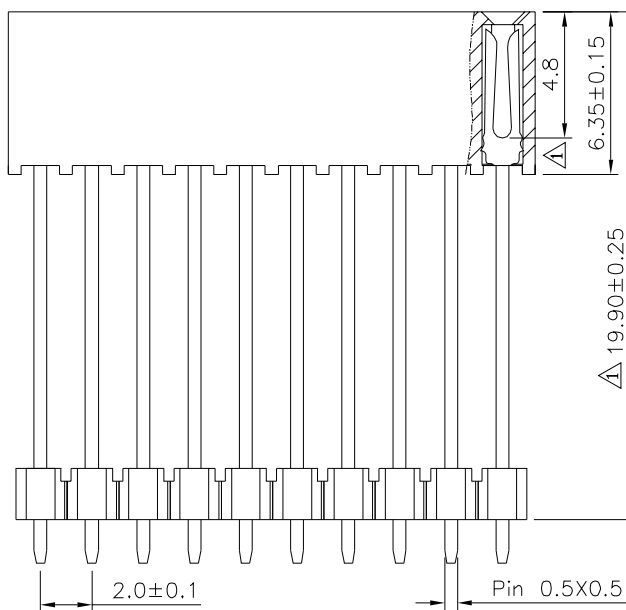
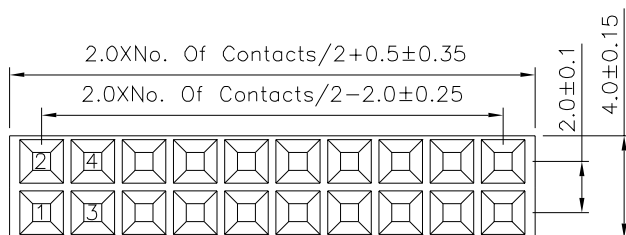


SPECIFICATION

Current Rating:1.5 Amps
 ⚠ Withstand Voltage:500V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature Range:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

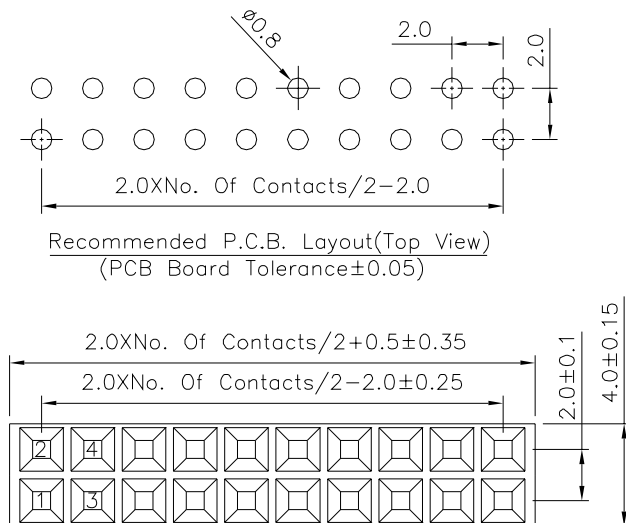

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠

21874

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

SCALE NONE

REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.25 X.* ±2*
 .X ±0.20 .X* ±1.5*
 .XX ±0.15 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1	Modify Data	HZF	05/14/2020	
⚠ A0	NEW RELEASE	HZF	10/18/2019	