


Recommended P.C.B. Layout

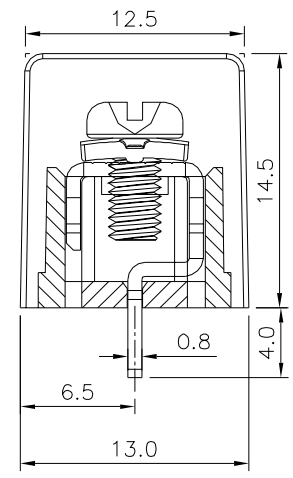

**SPECIFICATION**

Current Rating:15 Amps/Way Max.  
Voltage Rating:250V AC  
Contact Resistance:20 Milliohms Max.  
Operation Temperature:-40°C~+105°C  
Soldering Reliability:Test Temperature:  
250°C±10°C/5s Max.  
Withstanding Voltage:2500V AC (1 Minute)  
Test Time=60s/1 PCS  
Wire Range:16~22 AWG  
Torque:6 Kgf.cm/M3.0  
Insulator Body(Housing):PA66+G.F.(UL94V-0),Black  
Terminals:Copper Alloy,Tin Plated  
Terminal Screw:Steel,Galvanized With Cr3+ Plated  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
21884		EMILY		
		CHECKED BY HZF		
DRAWING BY		YBL		UNIT mm
SCALE	NONE	REV.	A0	

△ A0	NEW RELEASE	HZF	07/06/2013
NO. REV.	REVISIONS	CHK	DATE