


Recommended P.C.B. Layout



**SPECIFICATION**

Current Rating:15 Amps/Way Max.  
Voltage Rating:250V AC  
Contact Resistance:20 Milliohms Max.  
Operation Temperature:-40°C~+105°C  
Soldering Reliability:Test Temperature:  
250°C±10°C/5s Max.  
Withstanding Voltage:2500V AC (1 Minute)  
Test Time=60s/1 PCS  
Wire Range:16~22 AWG  
Torque:6 Kgf.cm/M3.0  
Insulator Body(Housing):PA66+G.F.(UL94V-0),Black  
Terminals:Copper Alloy,Tin Plated  
Terminal Screw:Steel,Galvanized With Cr3+ Plated  
RoHS Compliant

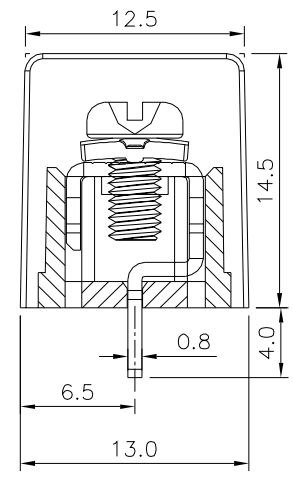

**元化興業股份有限公司**  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
21885		EMILY		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		YBL		
REV.	A0	NO. REV.		△ A0
		REVISIONS		NEW RELEASE
		CHK		HZF
		DATE		07/06/2013
