
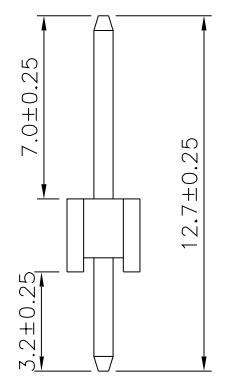
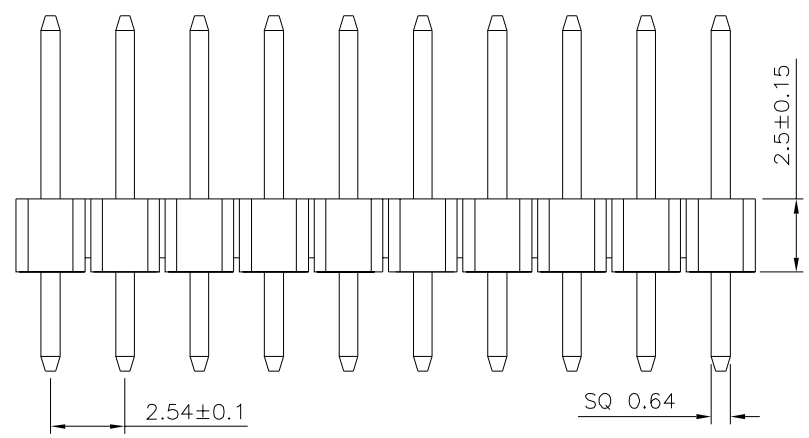


SPECIFICATION
 Current Rating:3 Amps
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

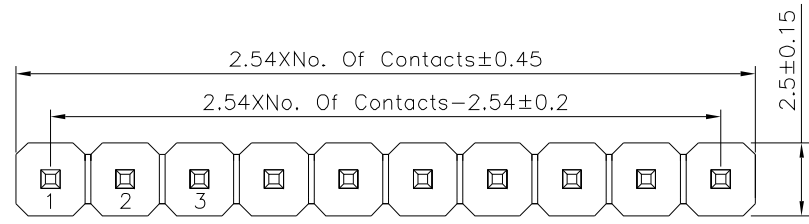

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X: ±0.25 X:* ±2" .X ±0.20 .X ±1.5" .XX ±0.15 .XX ±1" .XXX ±0.10 .XXX ±0.5"
21906		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT
		CYP		
SCALE	NONE	REV.	A0	

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	09/24/2020