


**SPECIFICATION**

Voltage Rating:DC 300V AC 300V  
 Contact Resistance:2 Ohms  
 Insulation Resistance:20 Megaohms  
 Test Time 0.6 Sec.  
 Short/Open Circuit At Moment:4/Sec.(Being Flexed Test)  
 RoHS Compliant

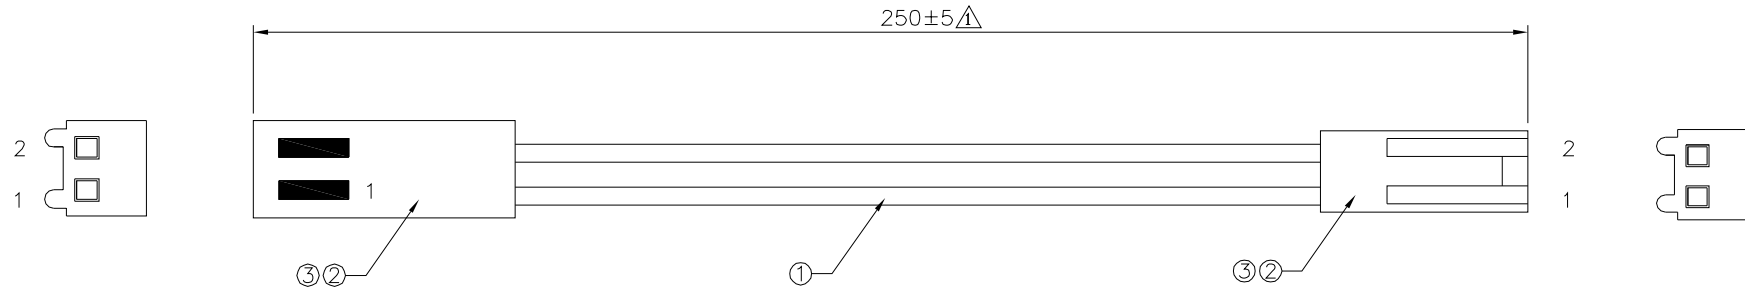

Pin Assignment		
P1	Color	P2
1	Black	1
2	Black	2

Item	Name	Specification	Q'ty
①	Wire	UL1007 26 AWG	2 PCS
②	Housing	PH 2.54mm MK Housing,2P	2 PCS
③	Terminal	PH2.54mm MK Matching Terminal	4 PCS

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
21937		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
.X ±0.38			
.XX ±0.25			
ANG.			
UNIT	mm		
NO.	REV.	REVISIONS	DATE
△	A1	Modify Data	HZF 09/16/2020
△	A0	NEW RELEASE	HZF 07/22/2020