


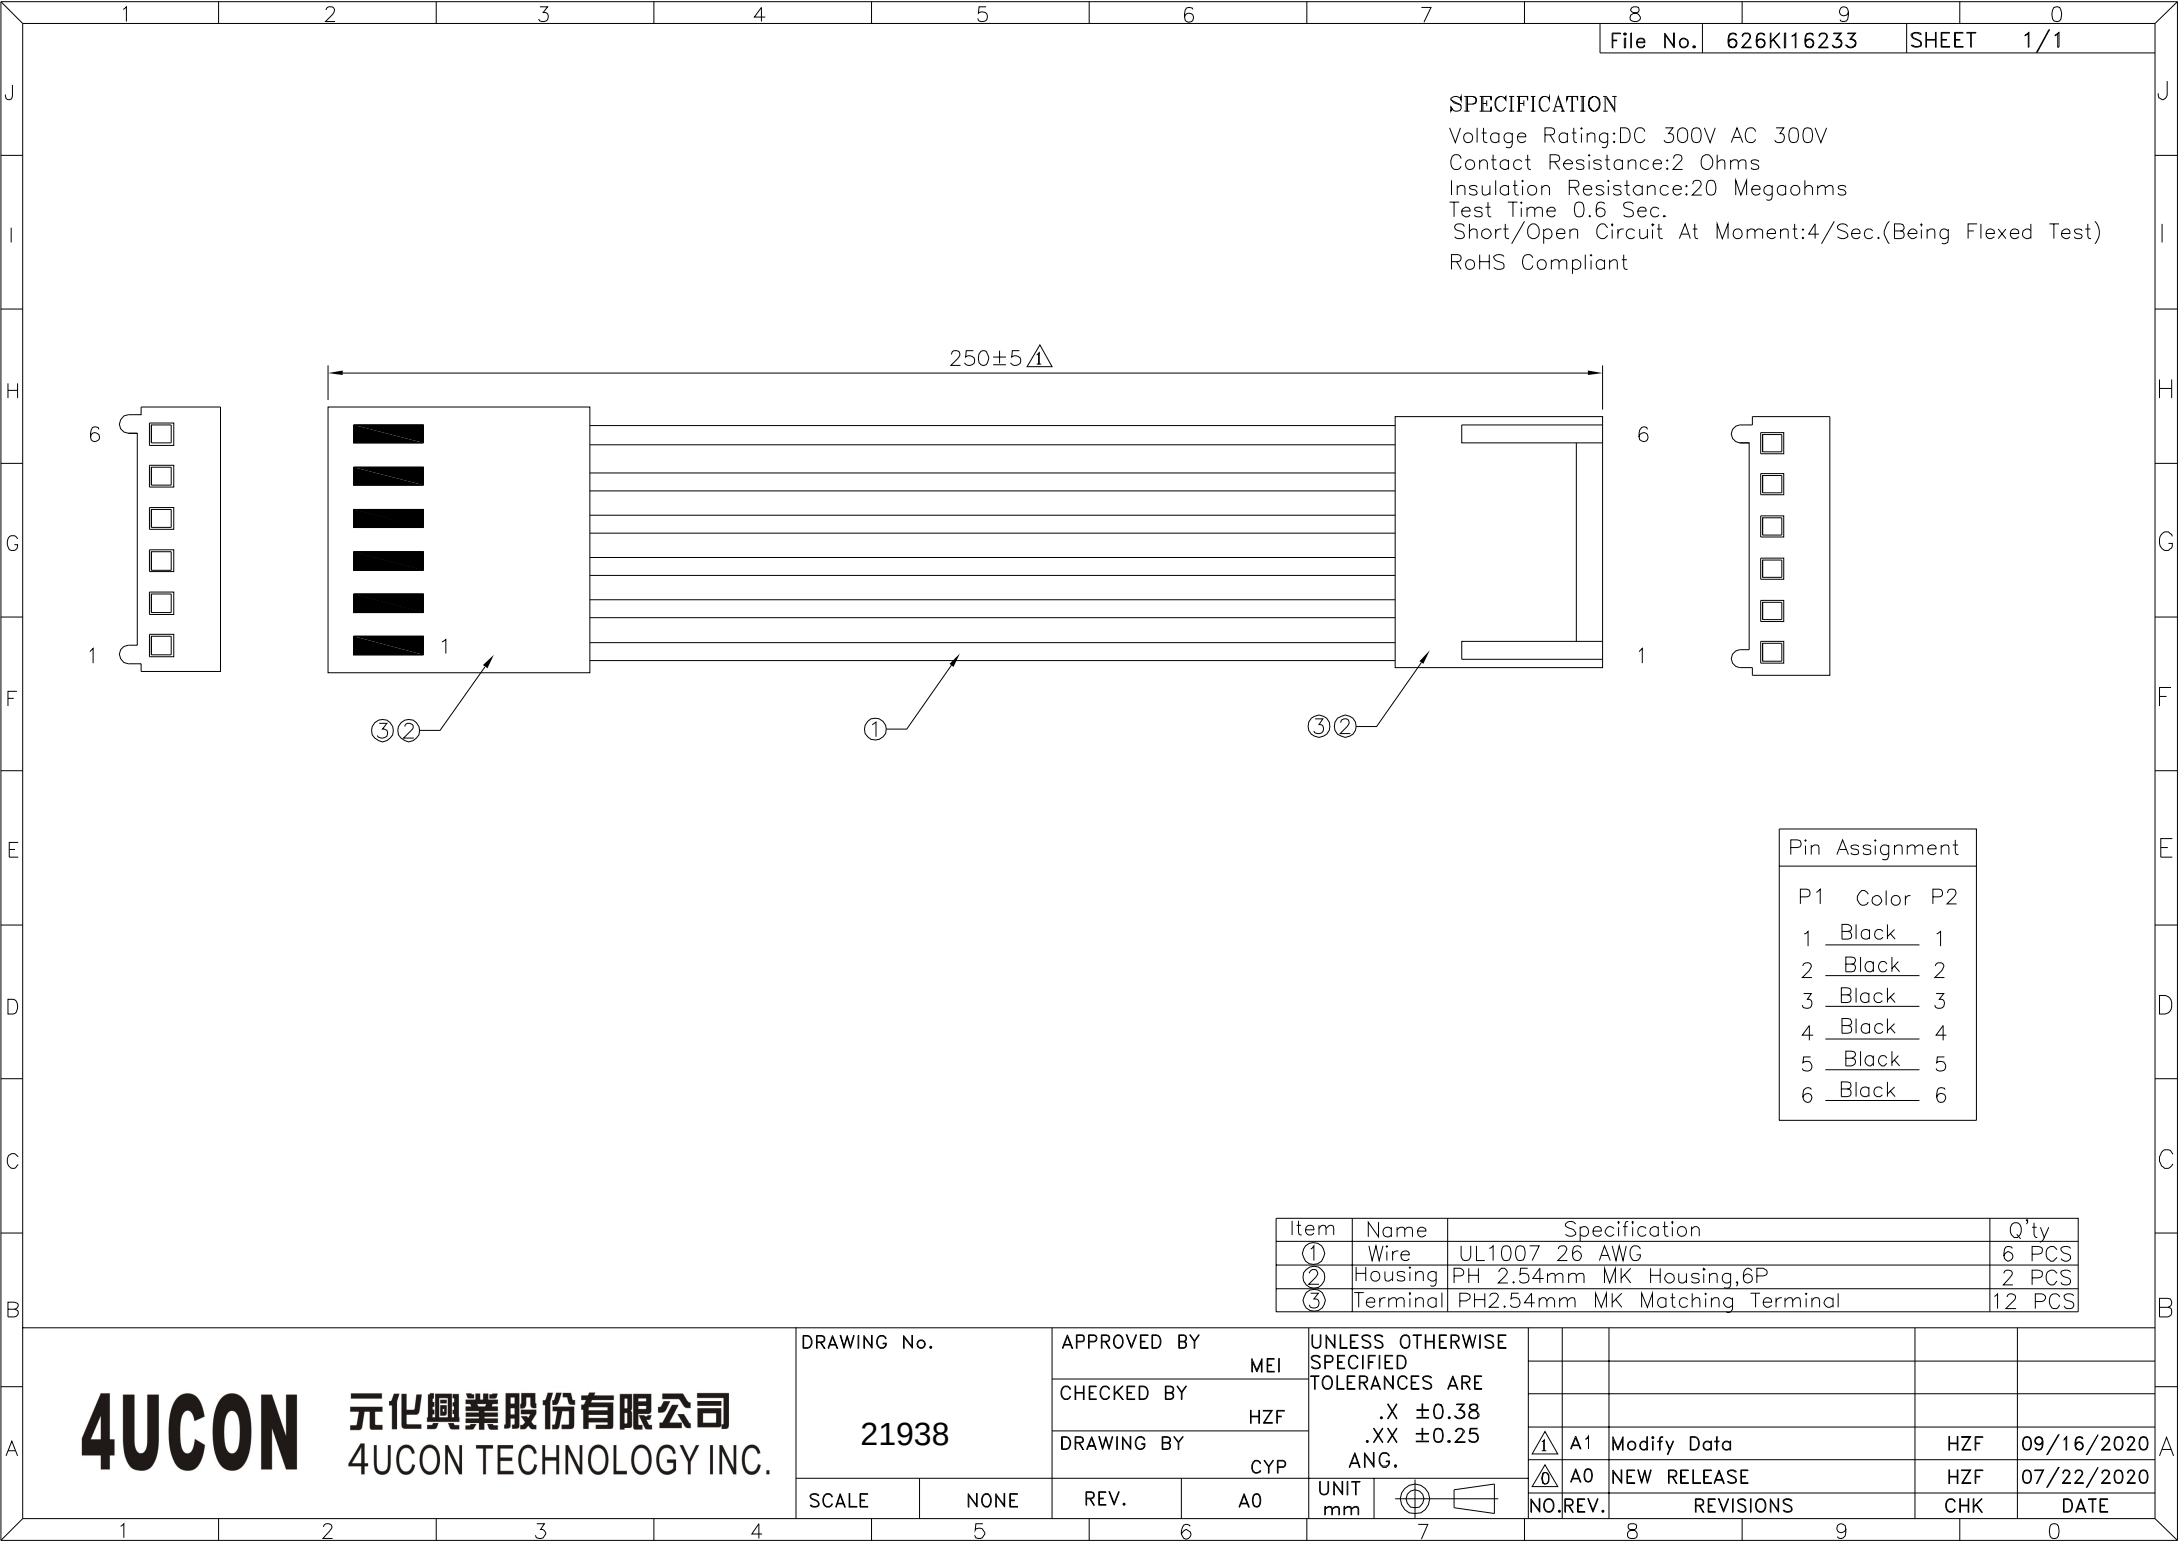

SPECIFICATION  
Voltage Rating:DC 300V AC 300V  
Contact Resistance:2 Ohms  
Insulation Resistance:20 Megaohms  
Test Time 0.6 Sec.  
Short/Open Circuit At Moment:4/Sec.(Being Flexed Test)  
RoHS Compliant

250±5

| Pin Assignment |       |    |
|----------------|-------|----|
| P1             | Color | P2 |
| 1              | Black | 1  |
| 2              | Black | 2  |
| 3              | Black | 3  |
| 4              | Black | 4  |
| 5              | Black | 5  |
| 6              | Black | 6  |

| Item | Name     | Specification                 | Q'ty   |
|------|----------|-------------------------------|--------|
| ①    | Wire     | UL1007 26 AWG                 | 6 PCS  |
| ②    | Housing  | PH 2.54mm MK Housing,6P       | 2 PCS  |
| ③    | Terminal | PH2.54mm MK Matching Terminal | 12 PCS |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

| DRAWING No. |      | APPROVED BY |     |
|-------------|------|-------------|-----|
| 21938       |      | MEI         |     |
|             |      | CHECKED BY  | HZF |
|             |      | DRAWING BY  | CYP |
| SCALE       | NONE | REV.        | A0  |

| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |      |             |            |
|-------------------------------------------|------|-------------|------------|
| .X ±0.38                                  |      |             |            |
| .XX ±0.25                                 |      |             |            |
| ANG.                                      |      |             |            |
| UNIT                                      | mm   |             |            |
| NO.                                       | REV. | REVISIONS   | DATE       |
| △                                         | A1   | Modify Data | 09/16/2020 |
| △                                         | A0   | NEW RELEASE | 07/22/2020 |