
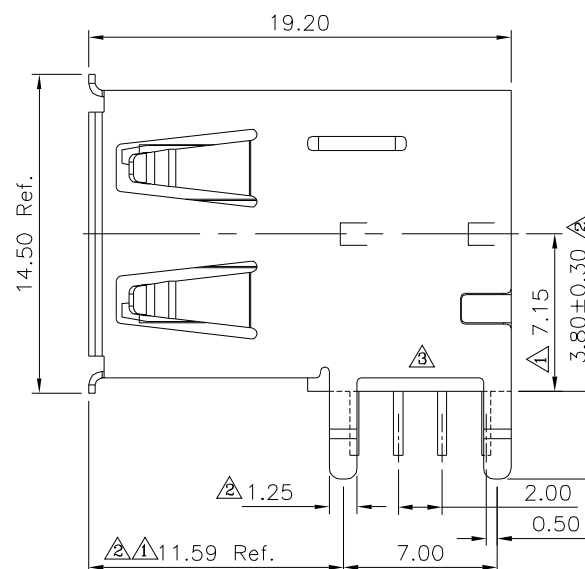
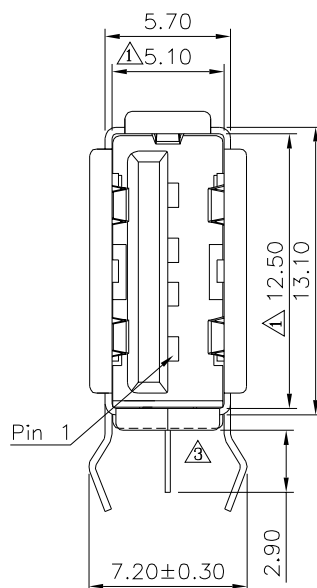


Recommended P.C.B. Layout

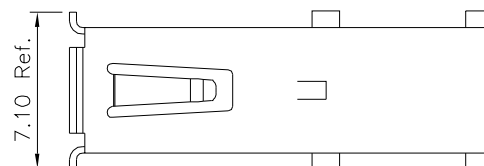

SPECIFICATION

Current:1.5A Max.
Voltage:30V Max.
Withstanding Voltage:500V AC
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Temperature Range:-55°C~+85°C
Mating Force:35N Max.
Withdrawal Force:10N Min.
Durability:1500 Cycles Min.

4 Contact:Phosphor Bronze,Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Insulator:PBT+30%G.F.(UL94V-0)
Back Cup:PBT+30%G.F.(UL94V-0)
Shell:Brass,Nickel Plated Over All
Back Shell:SPCC,Nickel Plated Over All
RoHS Compliant

Insulator Color	Item No.
White	22038
Black	20131

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. **4**

22038

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.38 .X* $\pm 2^*$
.XX ± 0.25 .XX* $\pm 1^*$
.XXX ± 0.13 .XXX* $\pm 0.5^*$

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	11/05/2018
3	A3	Modify Data	HZF	10/21/2013
2	A2	Modify Data	HZF	11/30/2010
1	A1	Modify Data	HZF	02/05/2010
0	A0	NEW RELEASE	HZF	06/14/2009