
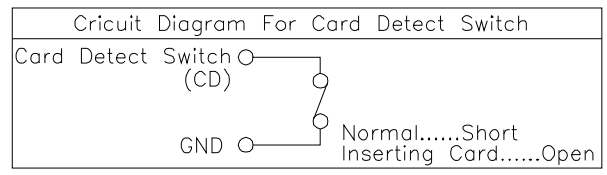



Pin No.	Name
C7	I/O
C6	VPP
C5	GND
C3	CLK
C2	RST
C1	VCC



**SPECIFICATION**

- 1.Material&Finish**  
 Insulator:LCP(UL94V-0),Black  
 Contact:Phosphor Bronze,Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel Shell:Stainless Steel,Gold Flash On Solder Area, Nickel Plated Over All
- 2.Electrical Characteristics**  
 Current Rating:0.5mA Max.  
 Contact Resistance:100 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min./250V DC  
 Dielectric Withstanding Voltage:500V AC
- 3.Environmental Characteristics**  
 Temperature Range:-25°C~+85°C
- 4.Mechanical Characteristics**  
 Mating Cycles:3,000 Insertions
- 5.RoHS Compliant**

Recommended P.C.B. Layout  
Tolerance:±0.05

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.* ±2°	⚠ A4	Modify Data	HZF	04/28/2023
22046		MEI			⚠ A3	Modify Data	HZF	04/21/2022
		CHECKED BY			⚠ A2	Modify Data	HZF	04/15/2022
SCALE		DRAWING BY		UNIT	⚠ A1	Modify Data	HZF	02/22/2021
NONE		HAO			⚠ A0	NEW RELEASE	HZF	06/15/2020
REV.	A4	NO.REV.		REVISIONS	CHK	DATE		