
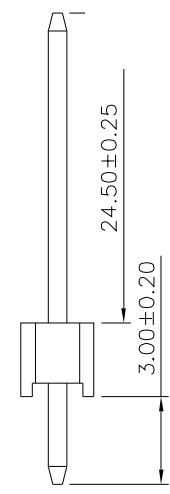
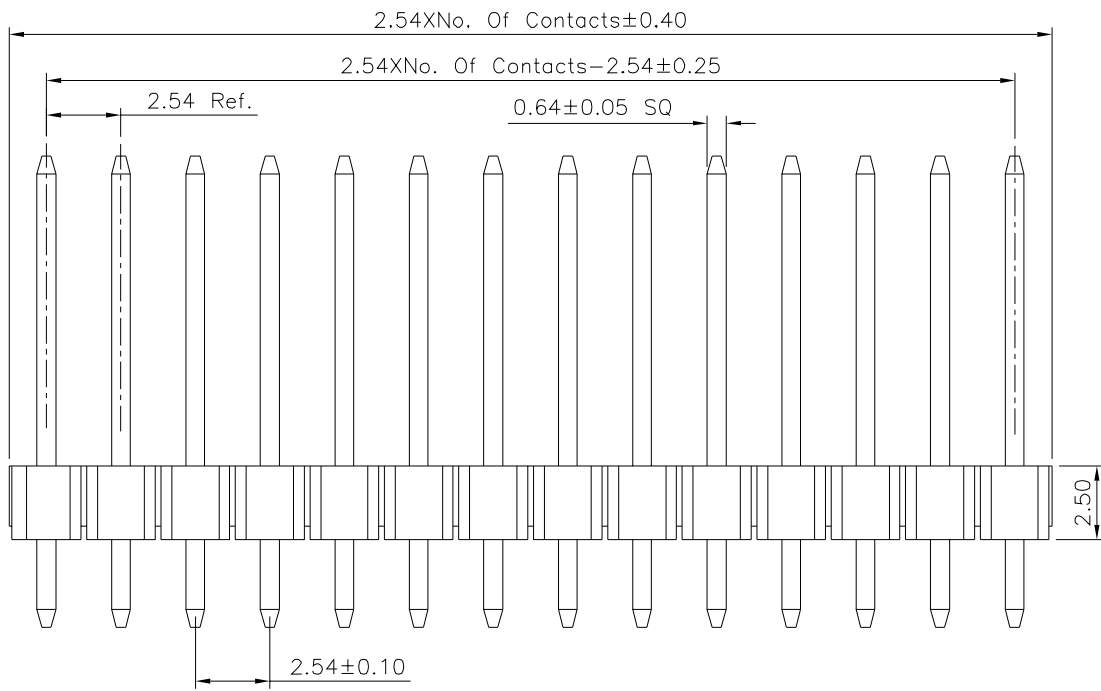


Recommended P.C.B Layout
Tolerance: ± 0.05



SPECIFICATION

Current Rating: 3.0 Amp/Contact Max.
 Withstand Voltage: 1000V AC/Minute
 Contact Resistance: 20 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PA6T+30%G.F.(UL94V-0), Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.50 .X ± 0.40 .XX ± 0.25 .XXX ± 0.15 ANG. $\pm 5^{\circ}$
22059		EMILY		
		CHECKED BY HZF		
DRAWING BY		GAO		UNIT mm
SCALE	NONE	REV.	A0	

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	03/03/2021