
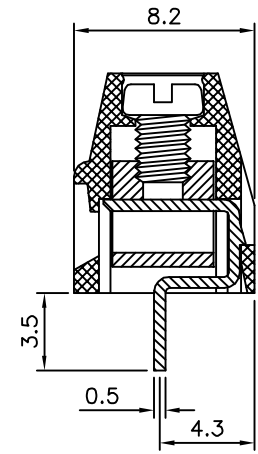
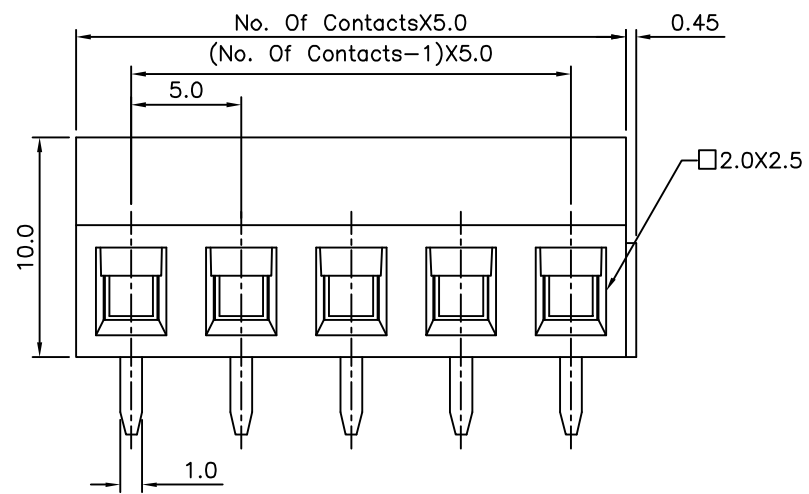


Recommended P.C.B. Layout

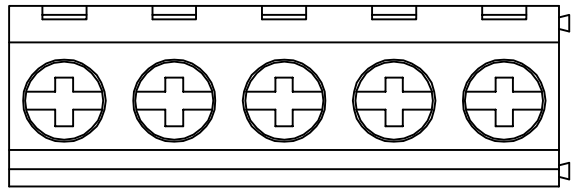

**SPECIFICATION**

Current Rating:16 Amp/Way Max.  
 Voltage Rating:300V AC  
 Contact Resistance:20 Milliohms Max.  
 Operation Temperature:-40°C~+105°C  
 Soldering Reliability:Test Temperature=250°C±10°C/  
 5 Seconds Max.  
 Withsanding Voltage:2500V AC  
 Test Time=60 Sec./1 PCS  
 Wire Range:12~30 AWG  
 Torque:4.5 kgf.cm/M2.5  
 Insulator Body(Housing):Polyamide(UL94V-0),Green  
 Contact(Metal Housing):Copper Alloy,Tin Pated  
 Solder Pin:Copper Alloy,Tin Plated  
 Terminal Screw:Steel,Galvanized With Cr3+ Plated  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
22077		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		WSS		
SCALE	NONE	REV.	A0	NO. REV.

△ A0	NEW RELEASE	HZF	07/12/2011
NO. REV.	REVISIONS	CHK	DATE