




Recommended P.C.B. Layout



1X2P~1X36P




1X37P, 1X38P, 1X39P




1X40P

SPECIFICATION


Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

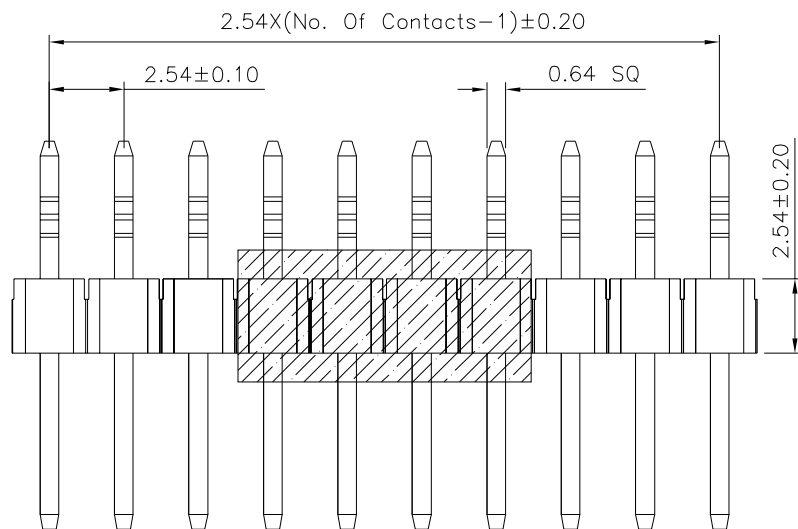

2

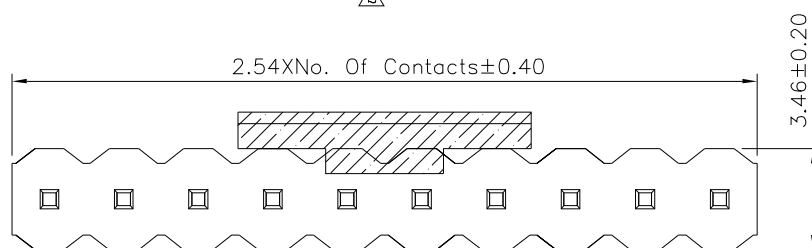

2

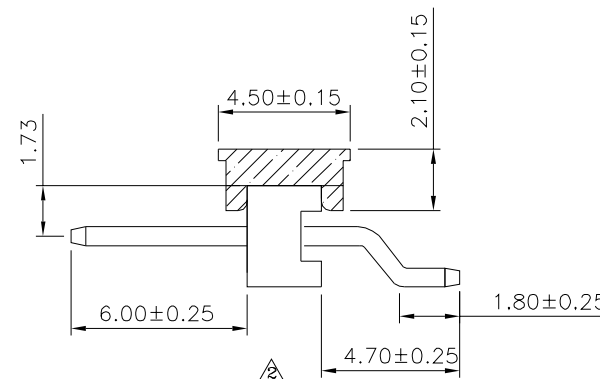

2

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1

22113

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.38

.XX ±0.25

.XXX ±0.05

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	11/01/2019
1	A1	Modify Data	HZF	08/28/2014
0	A0	NEW RELEASE	HZF	04/09/2012