
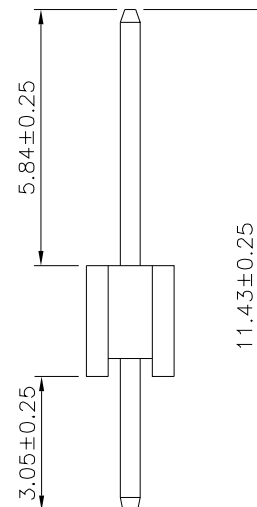
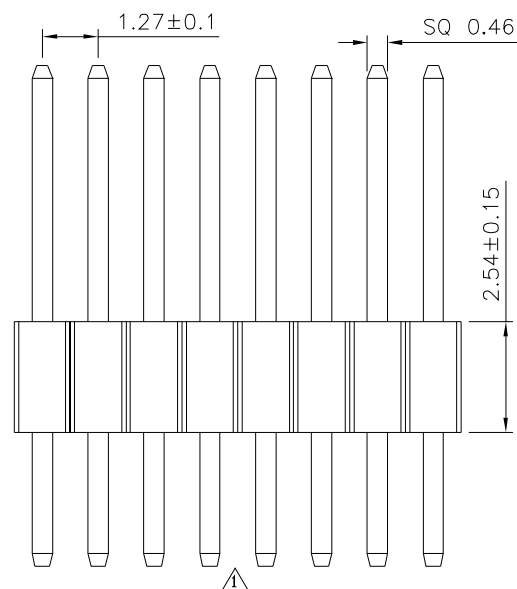


⚠ Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

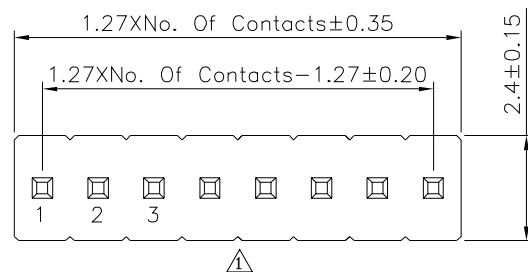

⚠ SPECIFICATION

Current Rating:1A
Withstand Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22139

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X..	$\pm 2^{\circ}$
.X	± 0.20	.X.	$\pm 1.5^{\circ}$
.XX	± 0.15	.XX.	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX.	$\pm 0.5^{\circ}$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A1

Modify Data

HZF

09/06/2023

A0

NEW RELEASE

HZF

01/01/2015