
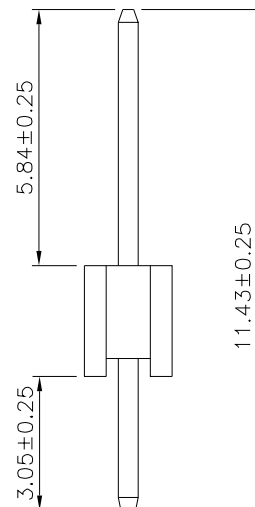
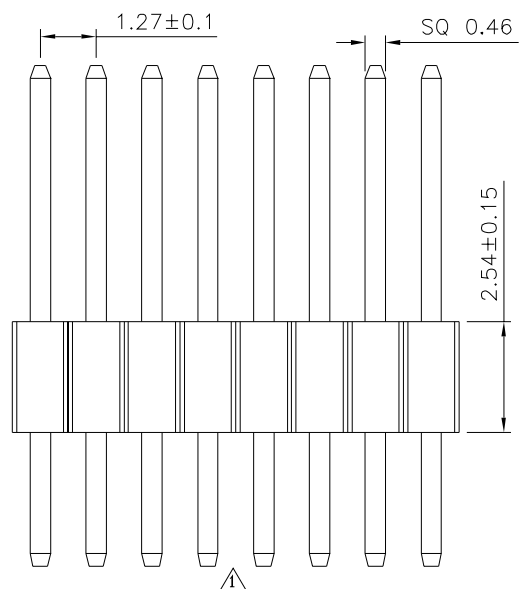


⚠ Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

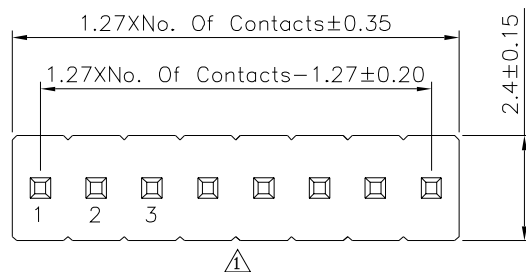

⚠ SPECIFICATION

Current Rating:1A
Withstand Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22140

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X..	$\pm 2^{\circ}$
.X	± 0.20	.X.	$\pm 1.5^{\circ}$
.XX	± 0.15	.XX.	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX.	$\pm 0.5^{\circ}$

UNIT
mm



NO.

REV.

A1

A0

Modify Data

NEW RELEASE

REVISIONS

HZF

HZF

CHK

DATE

09/06/2023

01/01/2015