
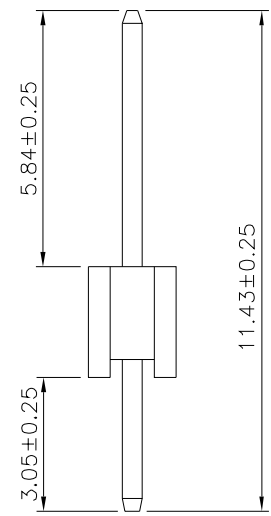
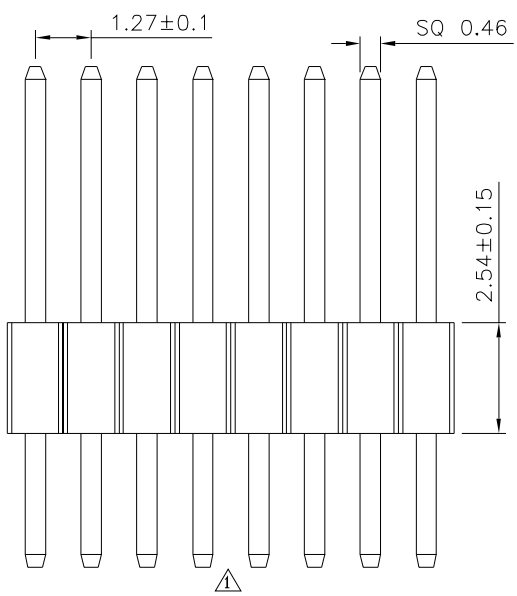


△ Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

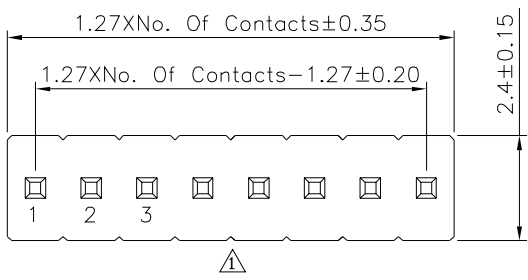

△ SPECIFICATION

Current Rating: 1A
 Withstand Voltage: 500V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: -40°C ~ +105°C
 Insulator: PA9T (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 22141

APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 HAO
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X: ±0.25 X.: ±2"
 .X ±0.20 .X.: ±1.5"
 .XX ±0.15 .XX.: ±1"
 .XXX ±0.10 .XXX.: ±0.5"
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	09/06/2023
△	A0	NEW RELEASE	HZF	01/01/2015