

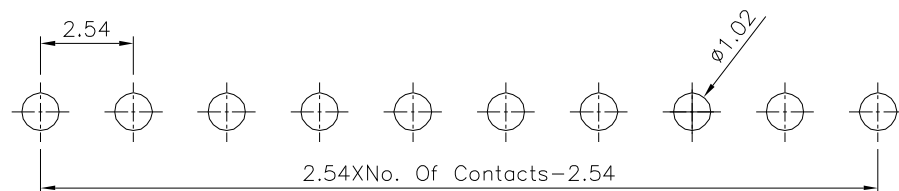
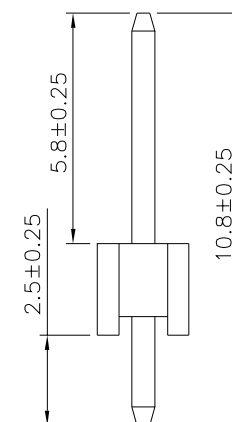


SPECIFICATION
Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-O),Black
RoHS Compliant

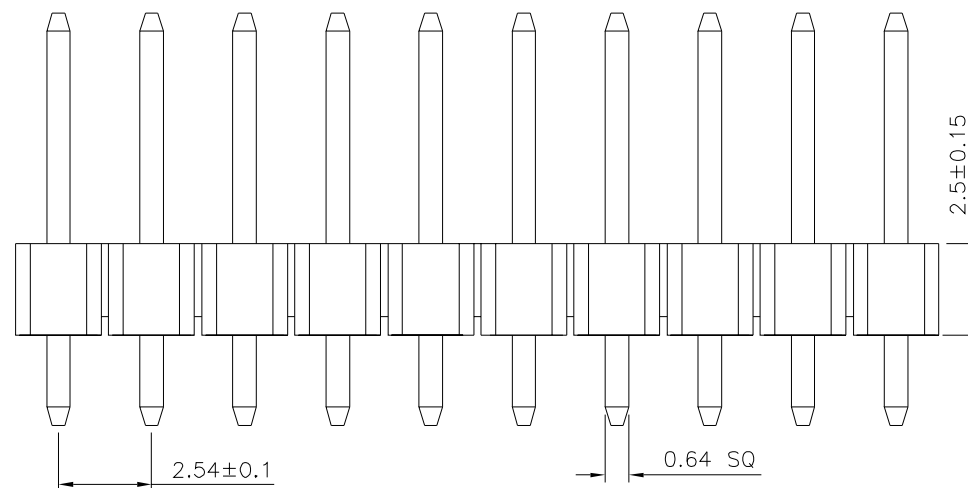

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

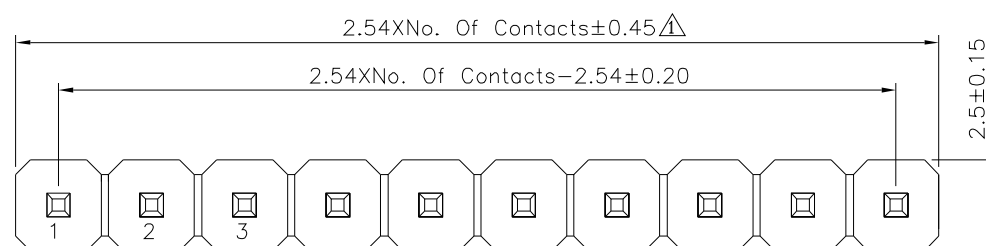

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22146

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.* ±2"
.X ±0.20 .X* ±1.5"
.XX ±0.15 .XX* ±1"
.XXX ±0.10 .XXX* ±0.5"

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	12/02/2021
2	A0	NEW RELEASE	HZF	01/04/2015