File No.	432LA26801	SHEET	1/1

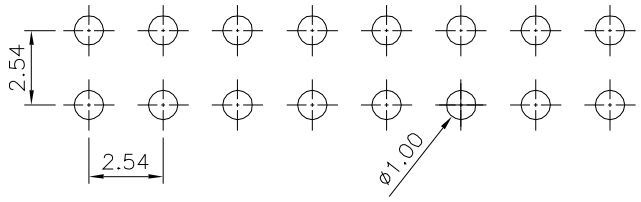

Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
1 Contact:Brass,Tin Plated Over Nickel
Insulator:PA9T+30%G.F.(UL94V−0),Black
RoHS Compliant

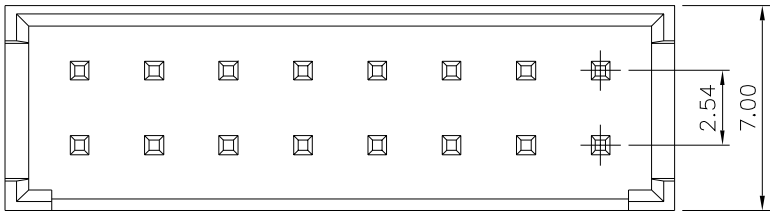

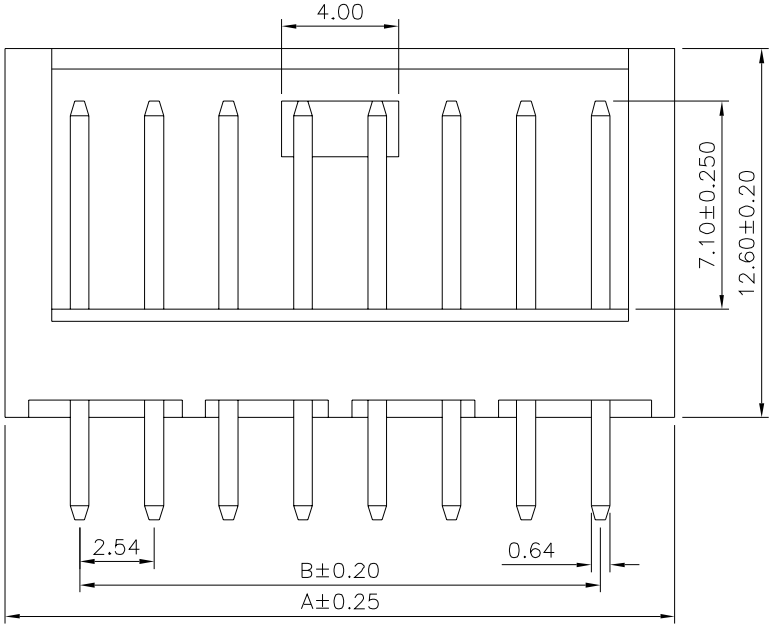

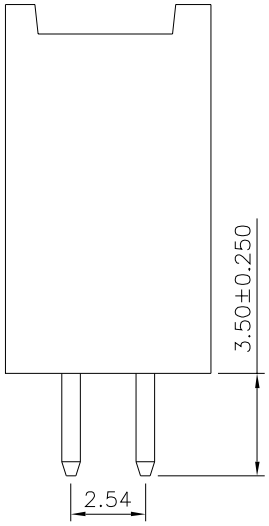

Pin	A	B
8	12.70	7.62
12	17.78	12.70
16	22.86	17.78
18	25.40	20.32
24	33.02	27.94
30	40.64	35.56
36	48.26	43.18
44	58.42	53.34

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	CHECKED BY	DRAWING BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
22157	MEI	HZF	CYP	.X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
SCALE NONE	REV. A1			UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	01/26/2021
0	A0	NEW RELEASE	HZF	01/28/2017