
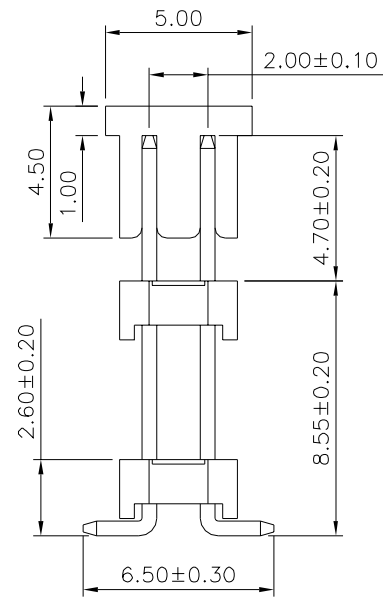
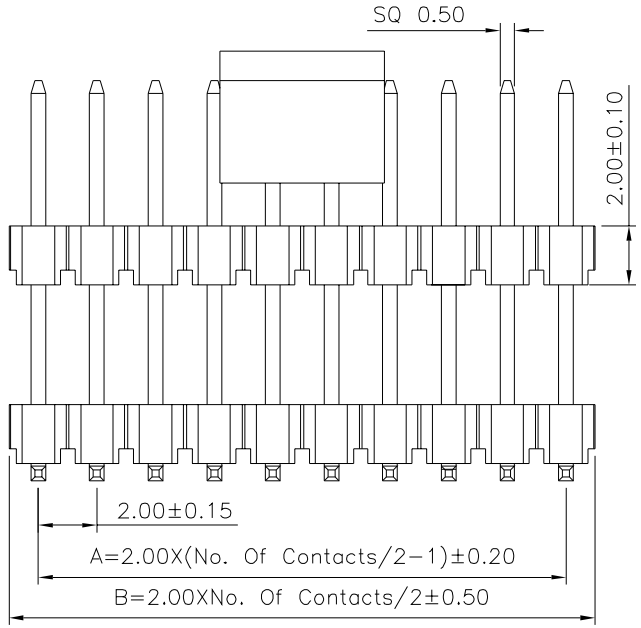


Recommended P.C.B. Layout  
(PCB Board Tolerance±0.05)

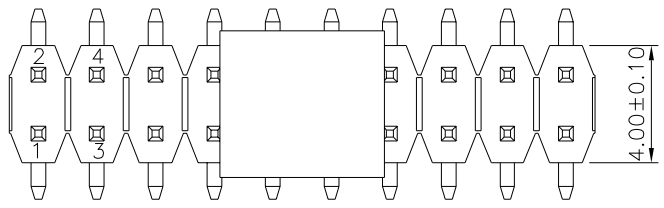

**SPECIFICATION**  
 Current Rating: 2 Amp  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Dielectric Withstand: 500V AC/Minute  
 Operating Temperature: -40°C ~ +105°C  
 Housing: PA6T+30%G.F. (UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

Pin	A	B	Pin	A	B
02	—	2.00	42	40.00	42.00
04	2.00	4.00	44	42.00	44.00
06	4.00	6.00	46	44.00	46.00
08	6.00	8.00	48	46.00	48.00
10	8.00	10.00	50	48.00	50.00
12	10.00	12.00	52	50.00	52.00
14	12.00	14.00	54	52.00	54.00
16	14.00	16.00	56	54.00	56.00
18	16.00	18.00	58	56.00	58.00
20	18.00	20.00	60	58.00	60.00
22	20.00	22.00	62	60.00	62.00
24	22.00	24.00	64	62.00	64.00
26	24.00	26.00	66	64.00	66.00
28	26.00	28.00	68	66.00	68.00
30	28.00	30.00	70	68.00	70.00
32	30.00	32.00	72	70.00	72.00
34	32.00	34.00	74	72.00	74.00
36	34.00	36.00	76	74.00	76.00
38	36.00	38.00	78	76.00	78.00
40	38.00	40.00	80	78.00	80.00

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 22160

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

SCALE NONE REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20

UNIT mm

△ A0	NEW RELEASE	HZF	07/27/2021
NO. REV.	REVISIONS	CHK	DATE