

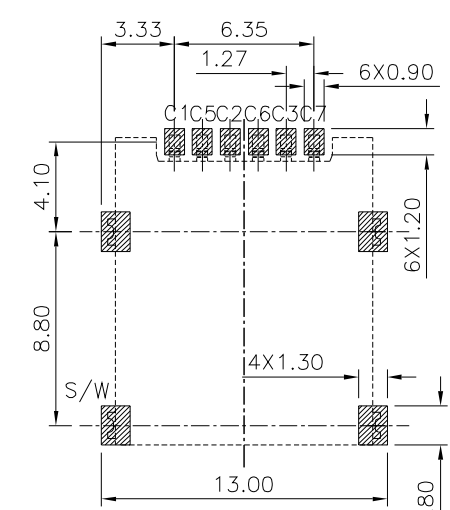
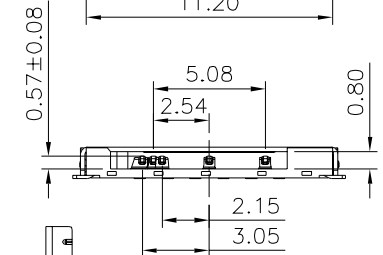
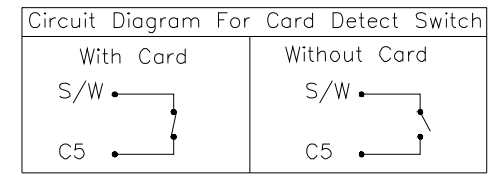


SPECIFICATION

- 1. Material & Finish
 Insulator: LCP(UL94V-0)
 Contact: Phosphor Bronze, Gold Flash On Contact Area And Solder Tails, Over Nickel
 Shell: Stainless Steel, No Plated
- 2. Electrical Characteristics
 Current Rating: 0.5A Max.
 Dielectric Withstanding Voltage: 500V AC Minute
 Insulation Resistance: 1000 Megaohms Min.
 ⚠ Contact Resistance: 50 Milliohms Max.
- 3. Mechanical Characteristics
 Life Cycles: 3000 Cycles
- 4. RoHS Compliant



Recommended P.C.B. Layout
 (PCB Board Tolerance ±0.05)
 ▨ SMT Solder Area

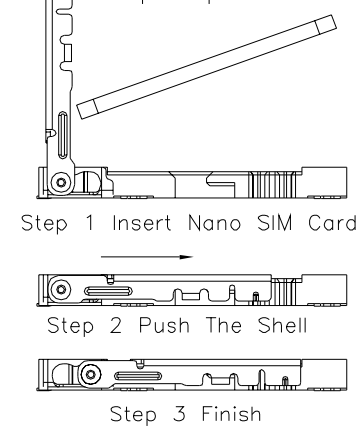

Pin No.	Pin Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.35 X.* ±5* .X ±0.30 .X* ±2* .XX ±0.25 .XX* ±1* .XXX ±0.15 .XXX* ±0.5*
22178		MEI		
SCALE NONE		CHECKED BY HZF		
REV. A1		DRAWING BY CYP		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	01/14/2020
△A0		NEW RELEASE	HZF	05/28/2019