
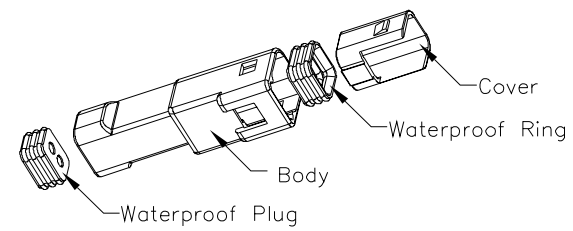
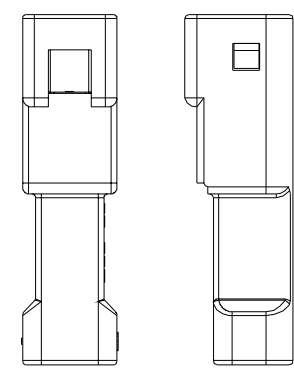
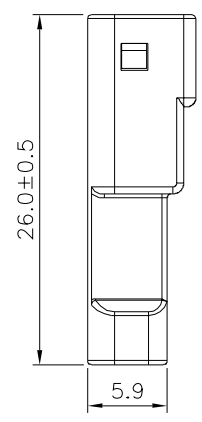
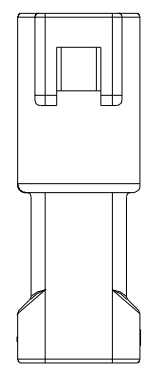
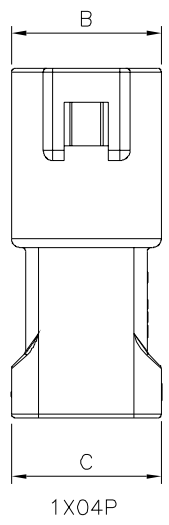

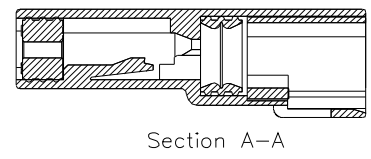


SPECIFICATION
 Current Rating:3A AC/DC (#22 AWG)
 Voltage Rating:250V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 (Including Temperature Rise)
 Water Proof:IPX7
 Body:PBT+15%G.F.,White
 Cover:PBT+15%G.F.,Orange
 Waterproof Ring:Oil Silicone,Blue
 Waterproof Plug:Oil Silicone,Light Blue
 RoHS Compliant

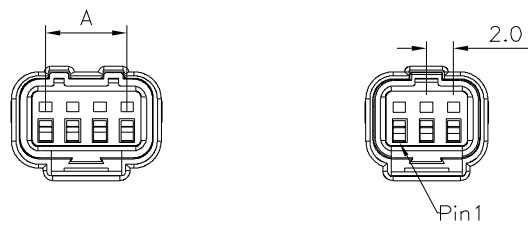

| Pin | A | B | C | D |
|-----|-----|------|------|-----|
| 2 | 2.0 | 7.0 | 7.0 | 8.1 |
| 3 | 4.0 | 9.0 | 9.0 | 8.4 |
| 4 | 6.0 | 11.0 | 11.0 | 8.4 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|---|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.4 .XX ±0.25 .XXX ±0.08 |
| 22245 | | MEI | | |
| | | CHECKED BY | | |
| | | HZF | | |
| | | DRAWING BY | | |
| | | HAO | | |
| SCALE | NONE | REV. | A0 | UNIT |
| | | | | mm |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 07/24/2021 |