


SPECIFICATION

Voltage Rating:DC 300V AC 300V
 Contact Resistance:2 Ohms
 Insulation Resistance:20 Megaohms
 Test Time 0.6 Sec.
 Short/Open Circuit At Moment:4/Sec.(Being Flexed Test)
 RoHS Compliant

270±5

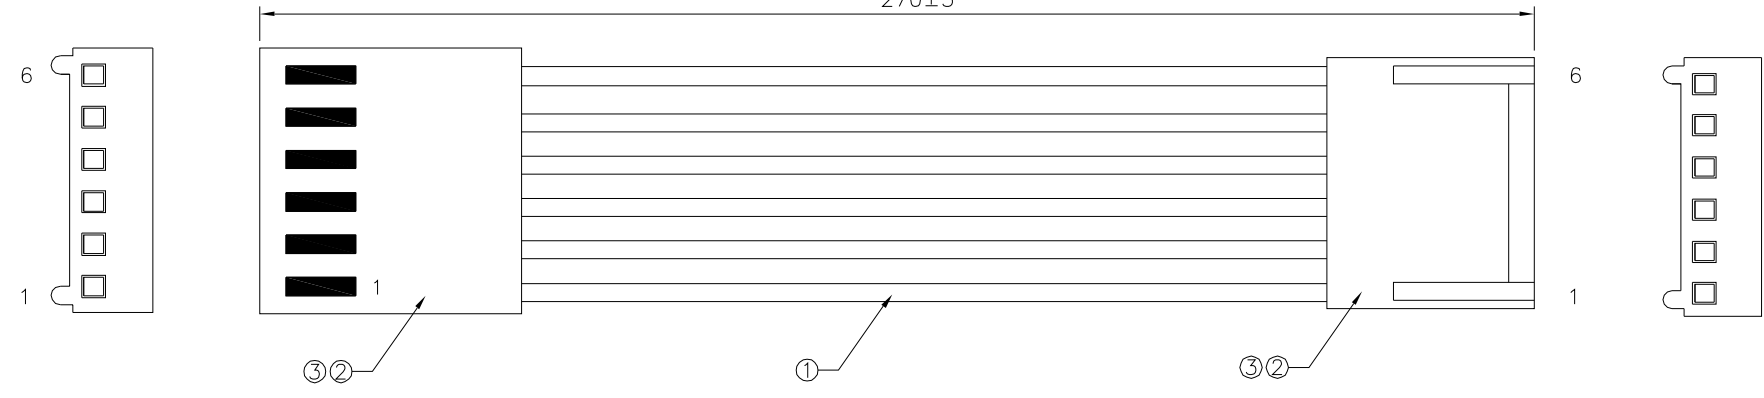

Pin Assignment		
P1	Color	P2
1	Black	1
2	Black	2
3	Black	3
4	Black	4
5	Black	5
6	Black	6

Item	Name	Specification	Q'ty
①	Wire	UL1007 26 AWG	6 PCS
②	Housing	PH 2.54mm MK Housing,6P	2 PCS
③	Terminal	PH2.54mm MK Matching Terminal	12 PCS

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
22262		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
.X ±0.38			
.XX ±0.25			
ANG.			
UNIT	mm	△ A0 NEW RELEASE	
		HZF	
		03/03/2022	
NO.REV.	REVISIONS		CHK DATE