


SPECIFICATION

Voltage Rating:DC 300V AC 300V
 Contact Resistance:2 Ohms
 Insulation Resistance:20 Megaohms
 Test Time 0.6 Sec.
 Short/Open Circuit At Moment:4/Sec.(Being Flexed Test)
 RoHS Compliant

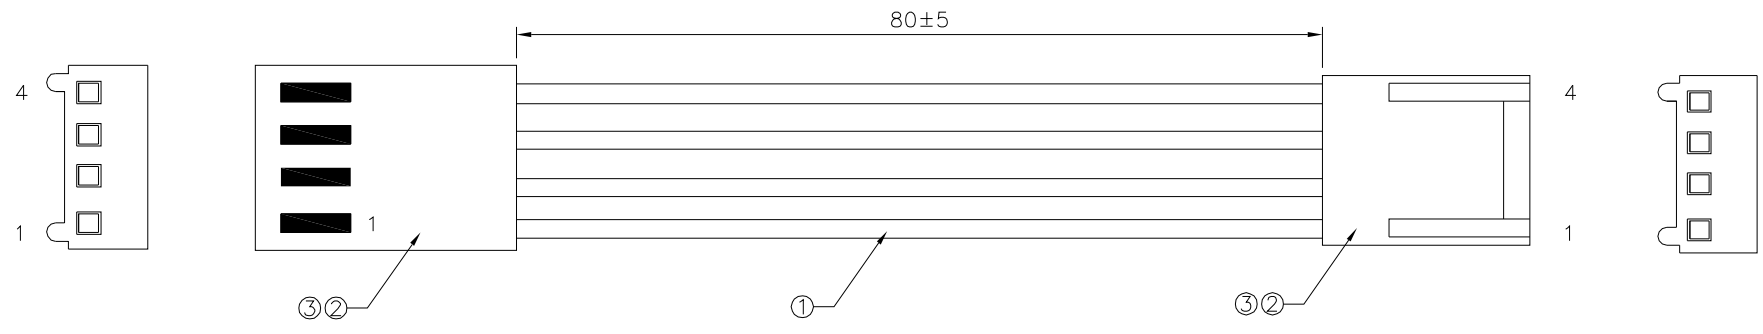

Pin Assignment		
P1	Color	P2
1	Red	1
2	Orange	2
3	Black	3
4	Yellow	4

Item	Name	Specification	Q'ty
①	Wire	UL1007 26 AWG	4 PCS
②	Housing	PH 2.54mm MK Housing,4P	2 PCS
③	Terminal	PH2.54mm MK Matching Terminal	8 PCS

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.					
22360		MEI							
		CHECKED BY							
		HZF							
		DRAWING BY							
		CYP							
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	HZF	07/18/2022
						NO.REV.	REVISIONS	CHK	DATE