

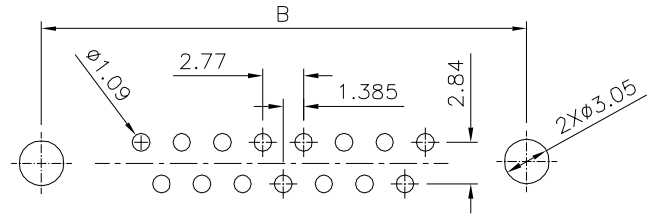
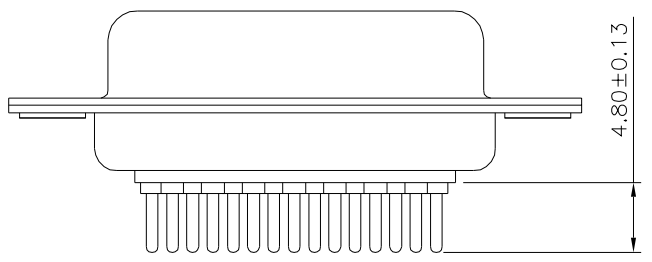


**SPECIFICATION**

Current Rating:5.0 Amps  
 Dielectric Withstanding Voltage:1000V AC Min.  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PBT+30%G.F.(UL94V-0),White  
 Contact:Brass,Gold Flash Over Nickel  
 Shell:Steel,Front Shell Nickel Plated,  
 Back Shell Tin Plated  
 RoHS Compliant

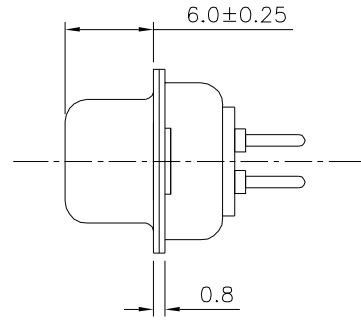

Recommended P.C.B. Layout

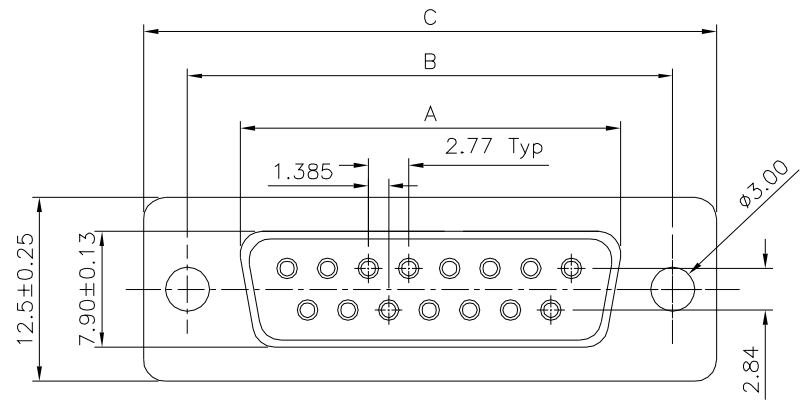

Pos.	A±0.25	B±0.13	C±0.38	D±0.25
09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.51
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.71

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 22374  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY LZX  
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.30  
 .XXX ±0.15  
 Radius ±0.25  
 Hole ±0.13

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	02/17/2022