

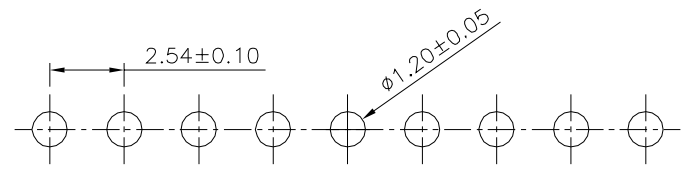
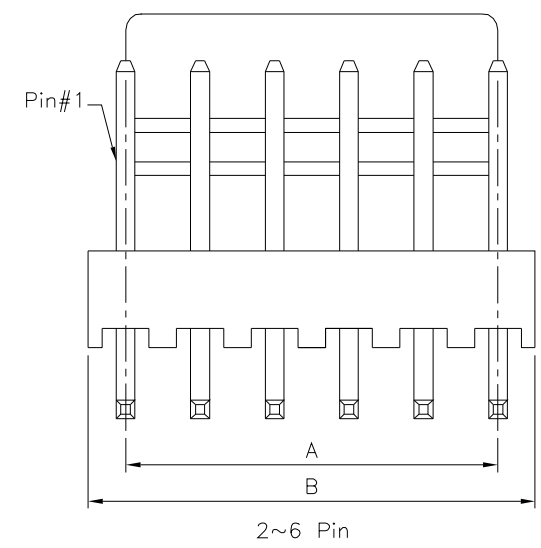


SPECIFICATION
 Current Rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:1000V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Pin:Brass,Tin Plated
 ⚠ Base:PA66(UL94V-2),Beige
 RoHS Compliant

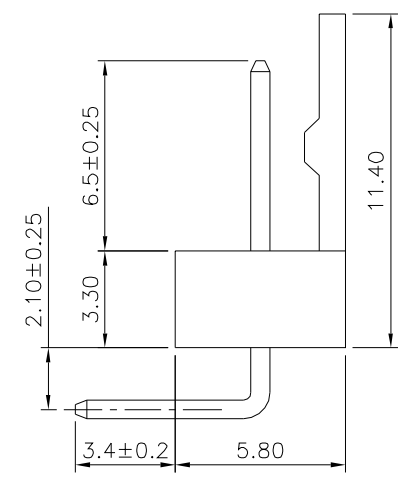

Recommended P.C.B. Layout

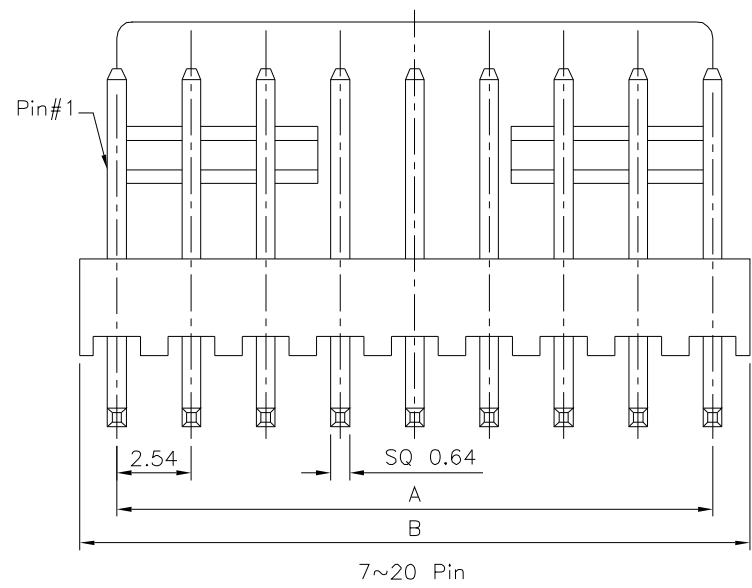

Pin	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 22441
 APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY WZL
 SCALE NONE REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.50
 .XX ±0.25
 .XXX ±0.10
 ANG. ±2°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	05/03/2022
⚠ A0		NEW RELEASE	HZF	09/22/2010