


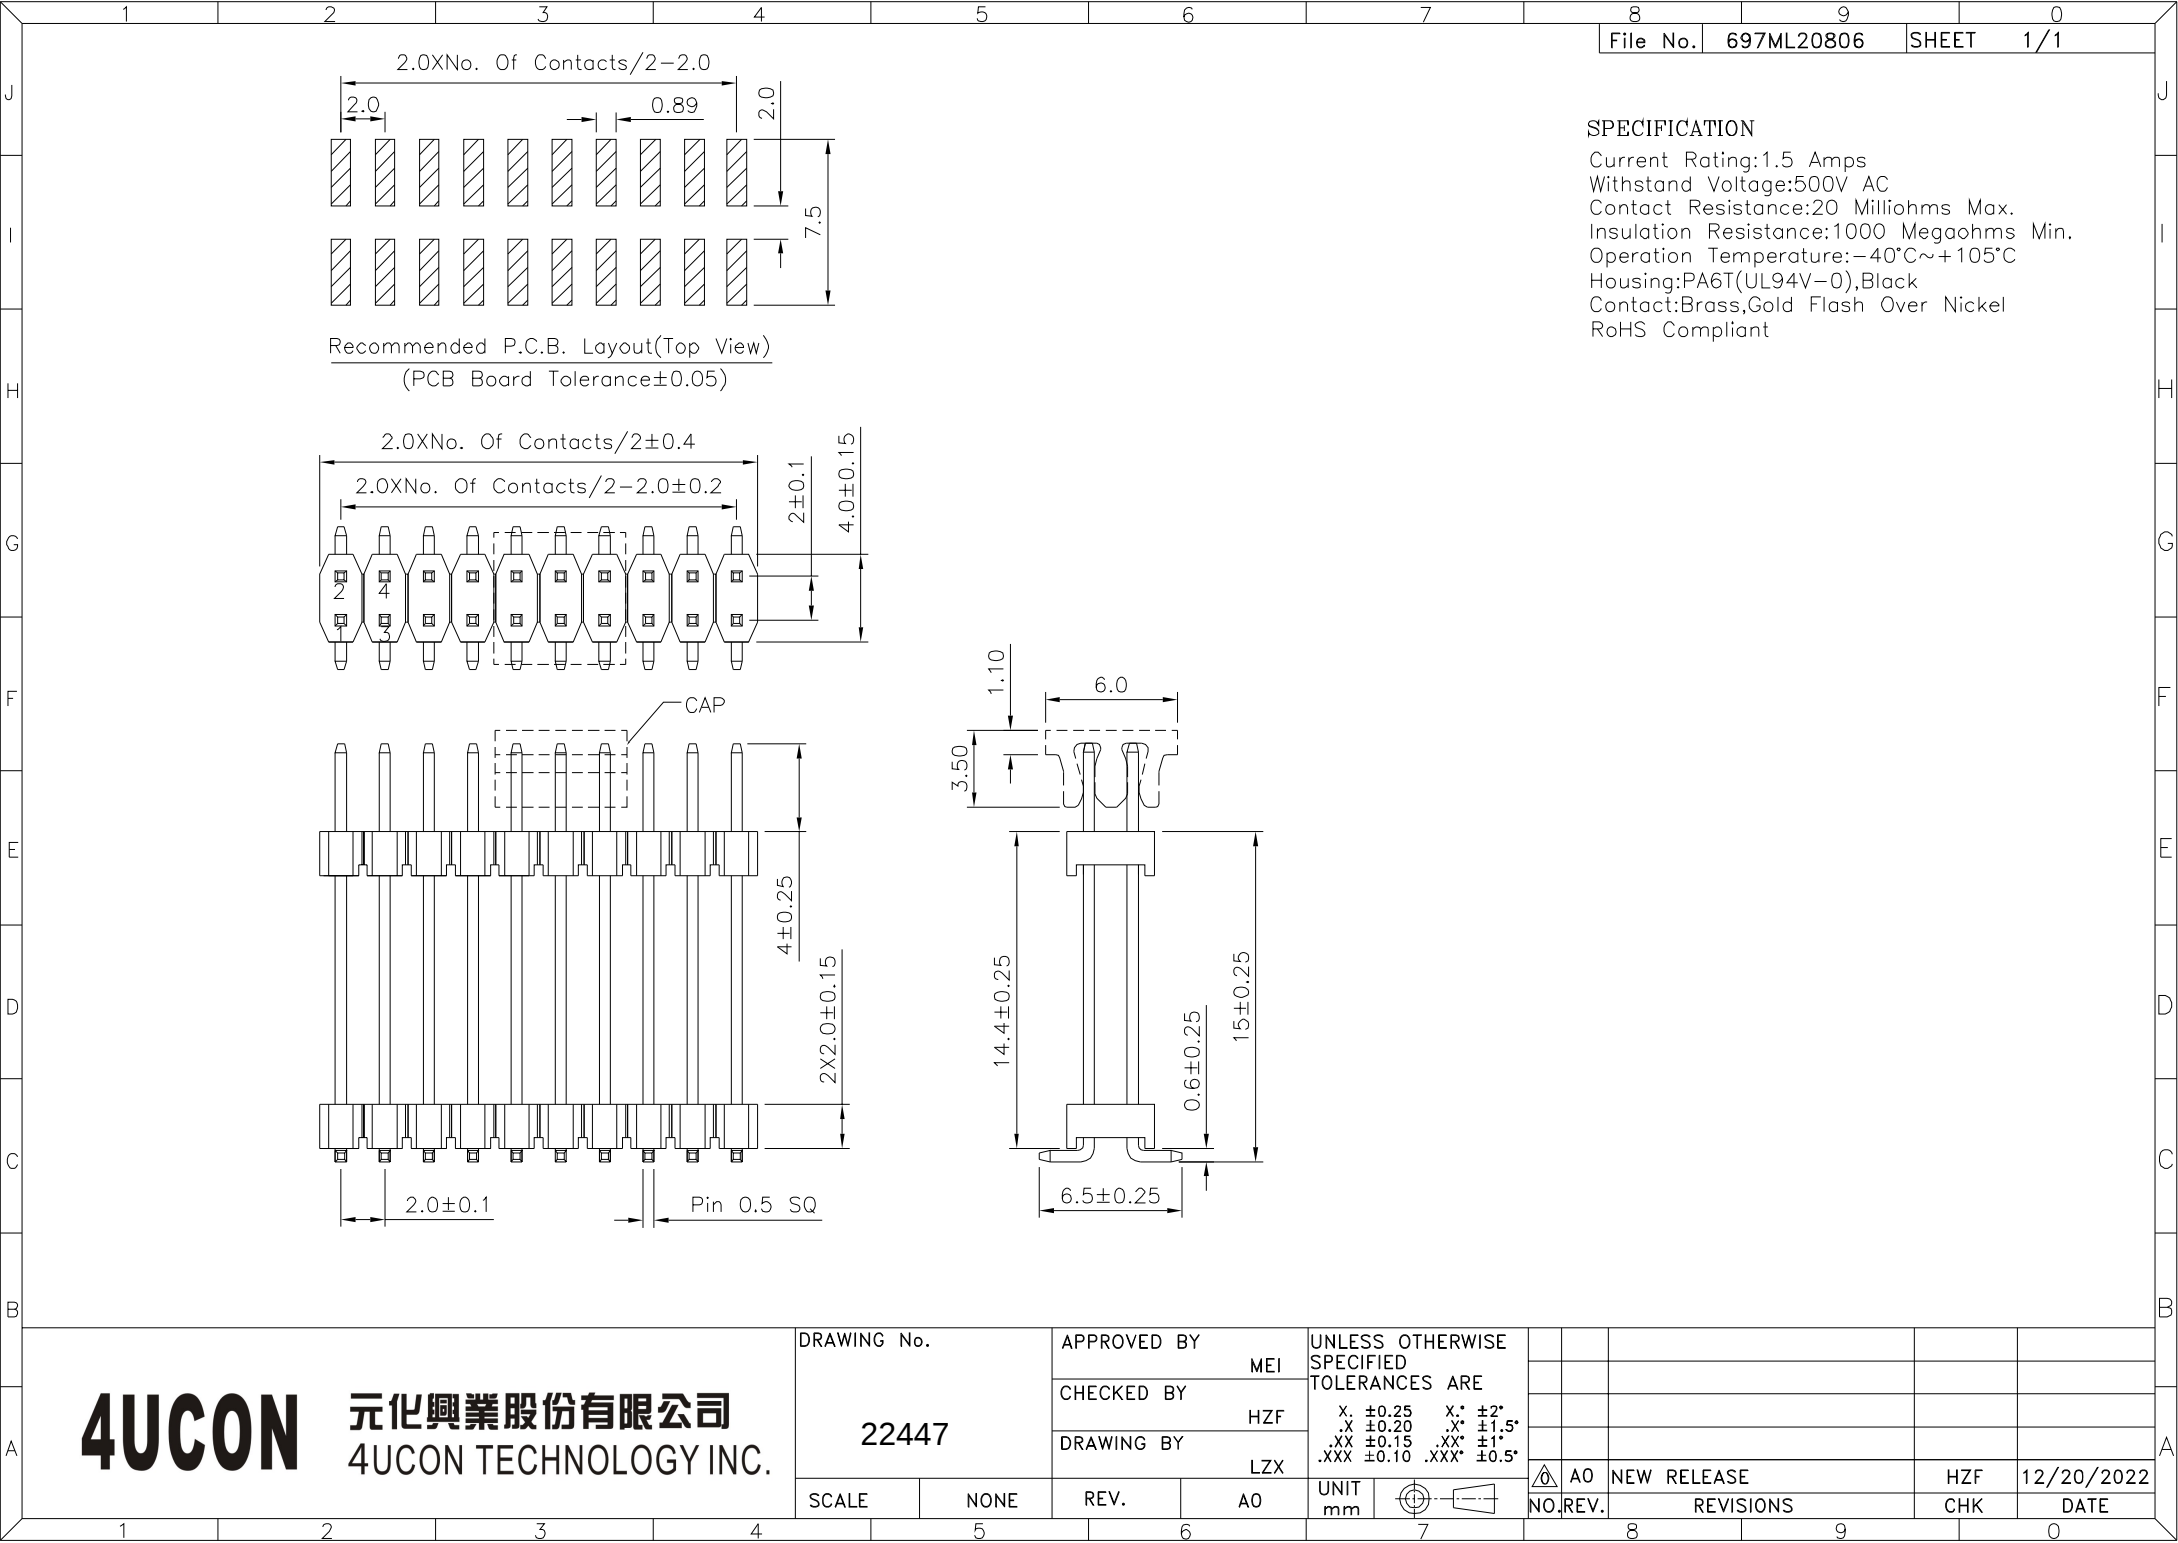

SPECIFICATION

Current Rating:1.5 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22447

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	±0.25	X.	±2°
.X	±0.20	.X	±1.5°
.XX	±0.15	.XX	±1°
.XXX	±0.10	.XXX	±0.5°

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

HZF

CHK

12/20/2022

DATE