



SPECIFICATION






Current Rating:1 Amps
 Withstand Voltage:500V For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),White
 Contact:Brass,Gold Flash Over Nickel
 Shell:Steel,Front:Nickel Plated,Rear:Tin Plated
 Screw:Steel,Nickel Plated
 Boardlocks:Brass,Tin Plated
 RoHS Compliant

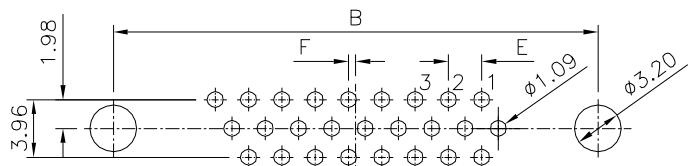

Recommended P.C.B. Layout(26,44,62 Pin)

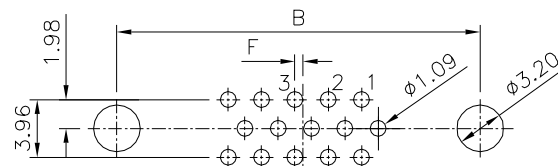

Recommended P.C.B. Layout(15 Pin)

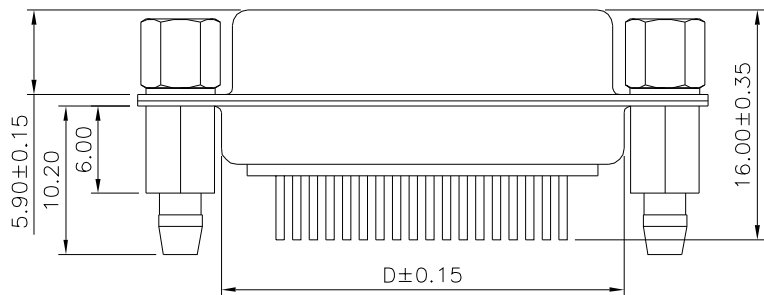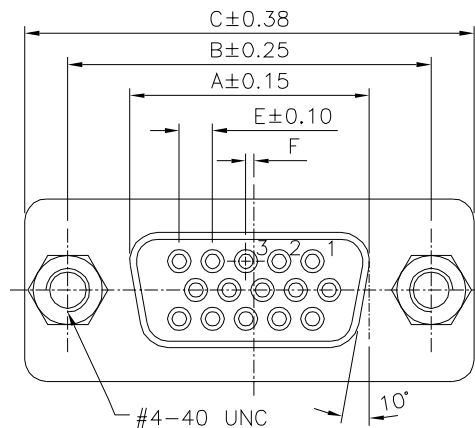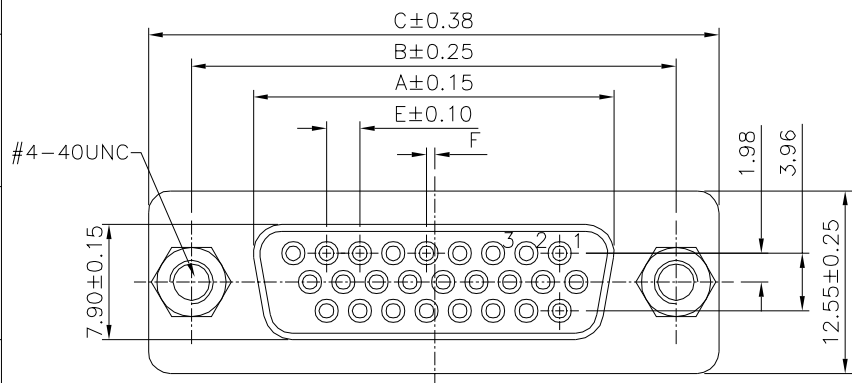

Item No.	PIN
10959	15
22469	26

Pin	A	B	C	D	E	F
15	16.33	24.99	30.81	19.20	2.29	0.25
26	24.80	33.32	39.20	27.70	2.29	0.50
44	38.38	47.04	53.04	41.10	2.29	0.50
62	54.84	63.50	69.40	57.30	2.41	0.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22469

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38 .X* ±3*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*





SCALE NONE

REV. BO

UNIT mm



NO.	BO	NEW RELEASE	HZF	02/15/2023
REVISIONS	CHK	DATE		

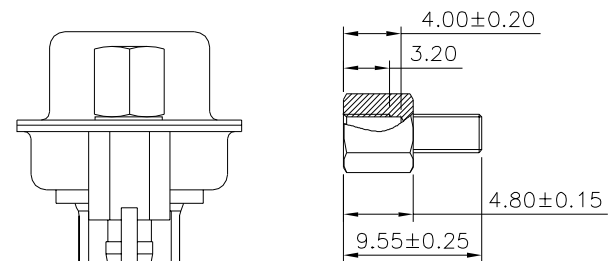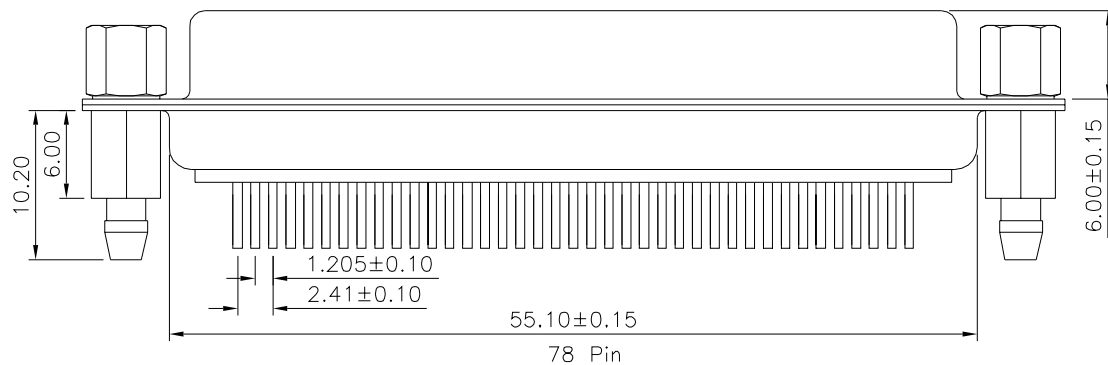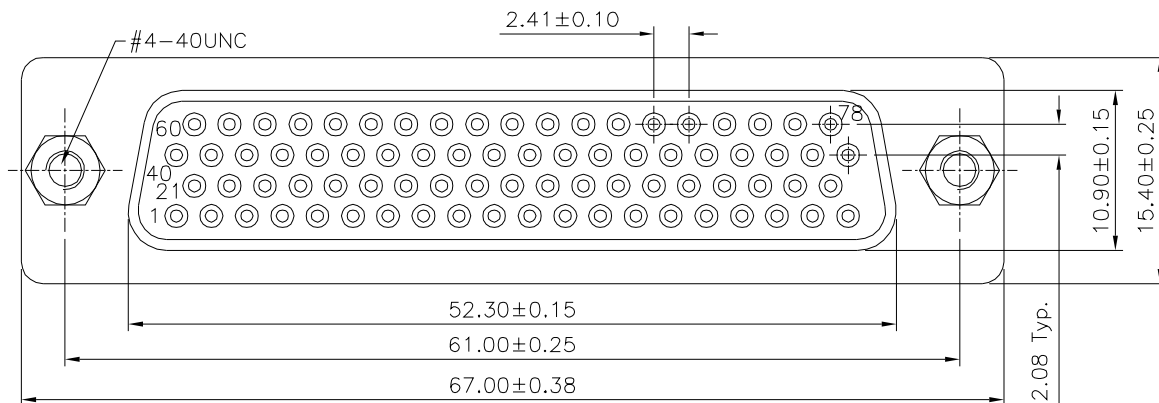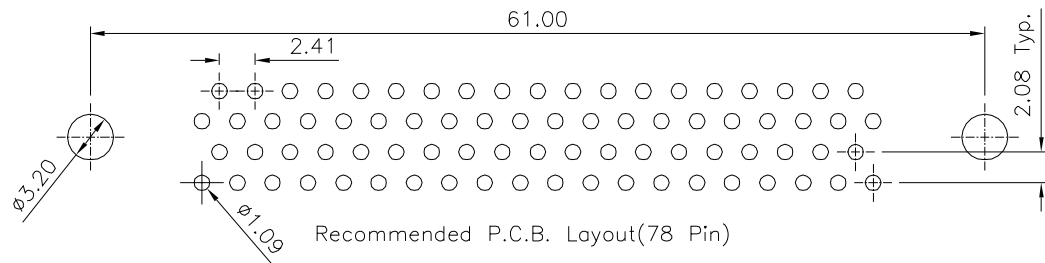

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22469

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

B0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38 .X* ±3*
.XX ±0.25 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT mm



NO. REV.

B0 NEW RELEASE

REVISIONS

CHK

HZF

DATE

02/15/2023