
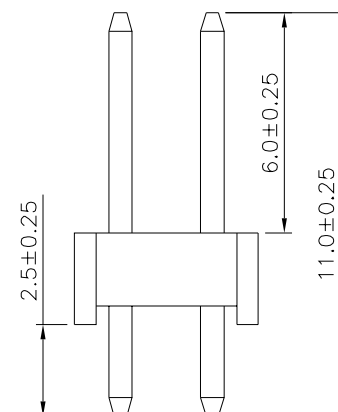
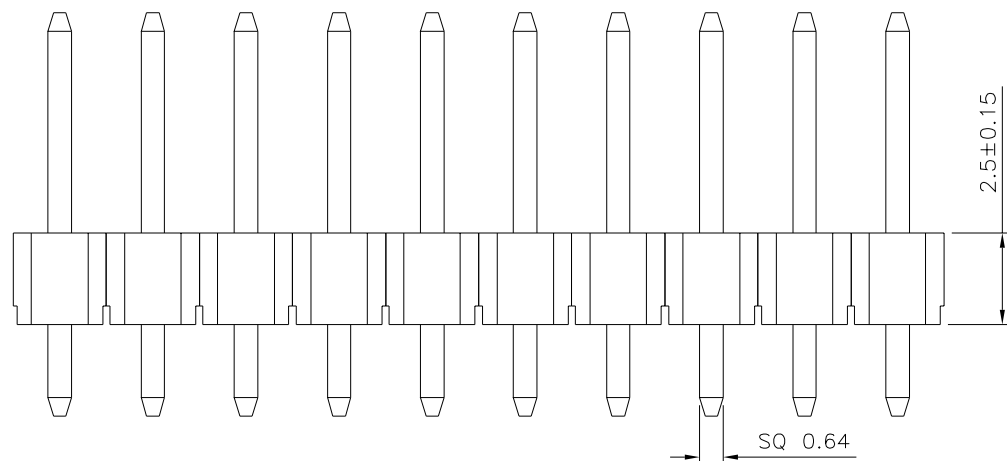


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

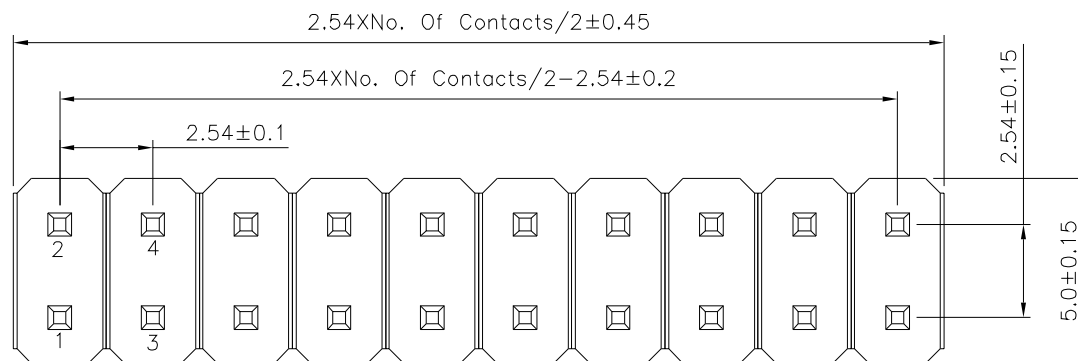

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature Range:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22510

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.30 X. $\pm 2^{\circ}$
.X ± 0.25 .X $\pm 1.5^{\circ}$
.XX ± 0.20 .XX $\pm 1.0^{\circ}$
.XXX ± 0.15 .XXX $\pm 0.5^{\circ}$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

03/21/2023