

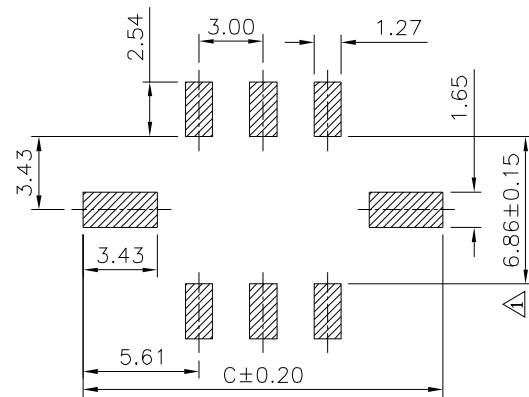
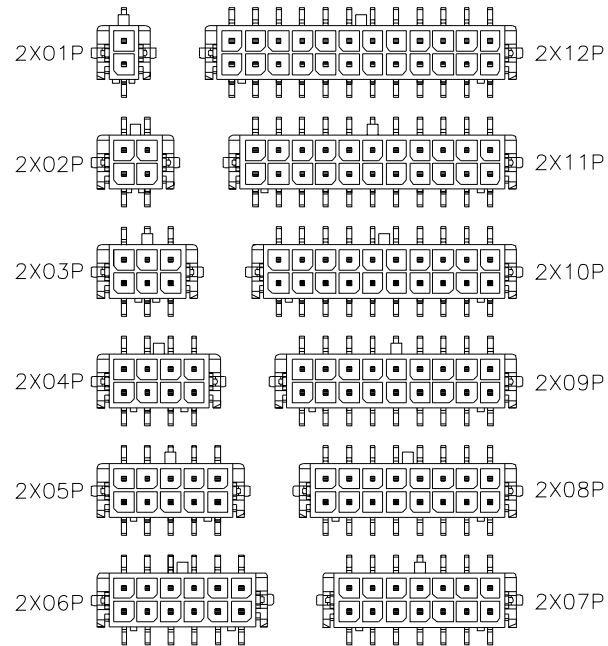


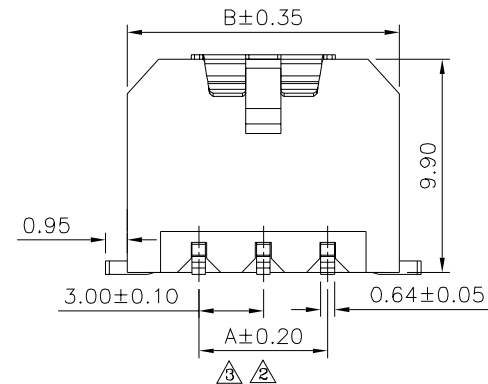

2 Recommended P.C.B. Layout(Top View)
Tolerance ± 0.05

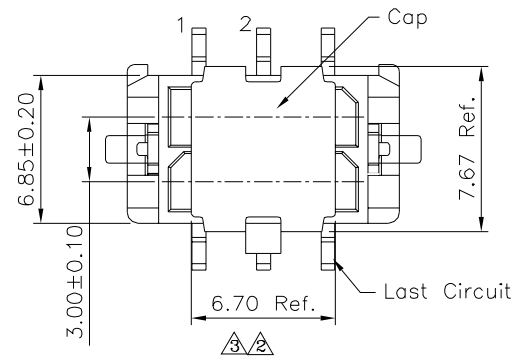

△₃△₁ SPECIFICATION

1. Material & Finish

Housing:LCP(UL94V-0),Black

Pin:Brass,Tin Plated

Solder Tabs:Brass,Tin Plated

Cap:Stainless Steel

2. Electrical Characteristics

Current Rating:5A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 20 Milliohms Max.

Insulation Resistance: 1000 Megaohms Min.

Withstand Voltage:1500V AC/Minute

3.Environmental Characteristics

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliant

Pin	A	B	c
02	—	6.65	11.20
04	3.00	9.65	14.20
06	6.00	12.65	17.20
08	9.00	15.65	20.20
10	12.00	18.65	23.20
12	15.00	21.65	26.20
14	18.00	24.65	29.20
16	21.00	27.65	32.20
18	24.00	30.65	35.20
20	27.00	33.65	38.20
22	30.00	36.65	41.20
24	33.00	39.65	44.20

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYF

22518

SCALE

NON

REV.

B3

UNIT
123 123

NO	REV
----	-----

REVISIONS

112
CH

DATE