
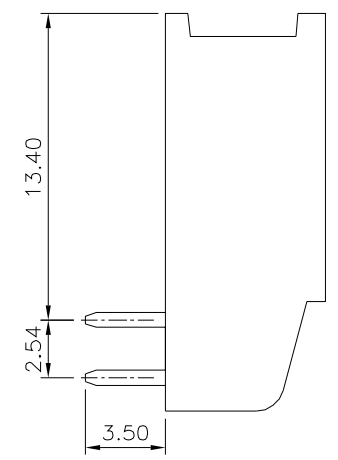
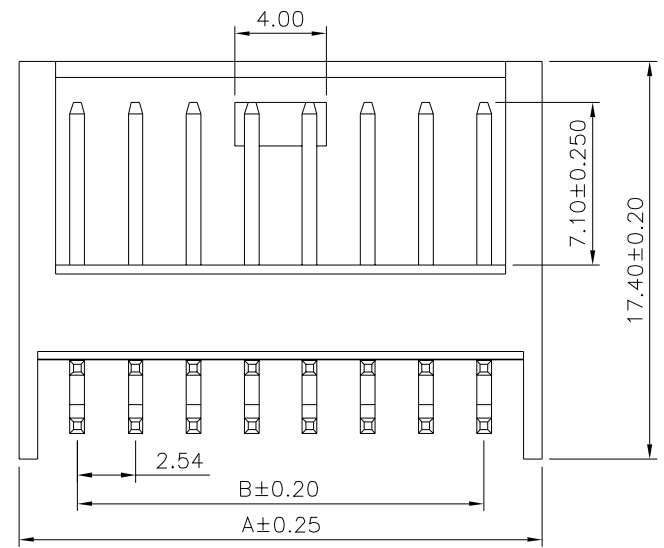
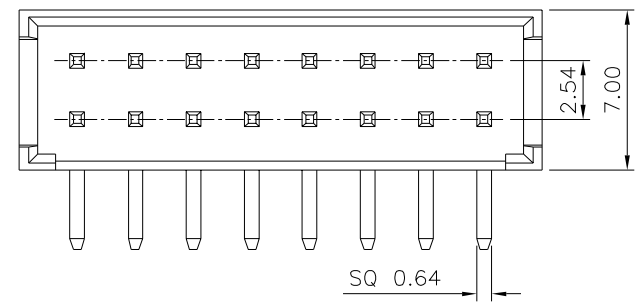


**SPECIFICATION**

Current Rating:3.0 Amp  
 Withstand Voltage:1000V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PA9T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

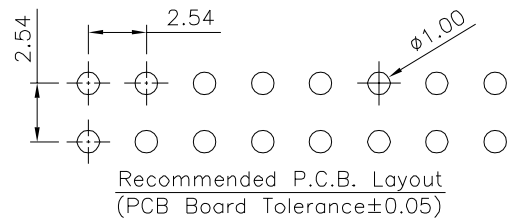

Pin	A	B
6	10.16	5.08
8	12.70	7.62
10	15.24	10.16
12	17.78	12.70
14	20.32	15.24
16	22.86	17.78
18	25.40	20.32
20	27.94	22.86
22	30.48	25.40
24	33.02	27.94
26	35.56	30.48
28	38.10	33.02
30	40.64	35.56
32	43.18	38.10
34	45.72	40.64
36	48.26	43.18
38	50.80	45.72
40	53.34	48.26
42	55.88	50.80
44	58.42	53.34

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
22538		MEI		
		CHECKED BY	HZF	
		DRAWING BY	LZX	
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	08/08/2022
		REVISIONS		