

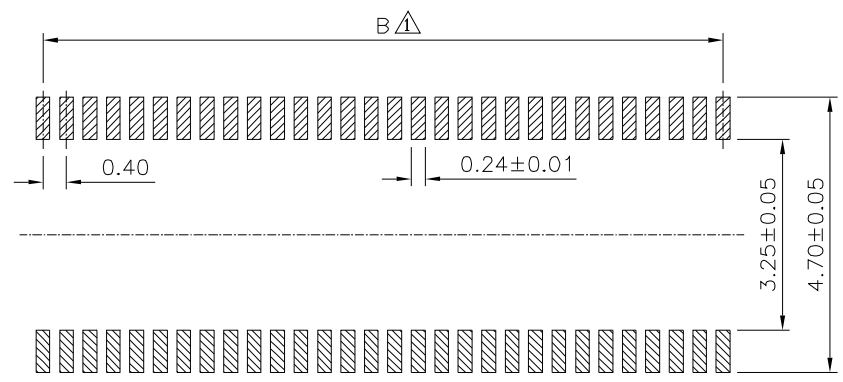

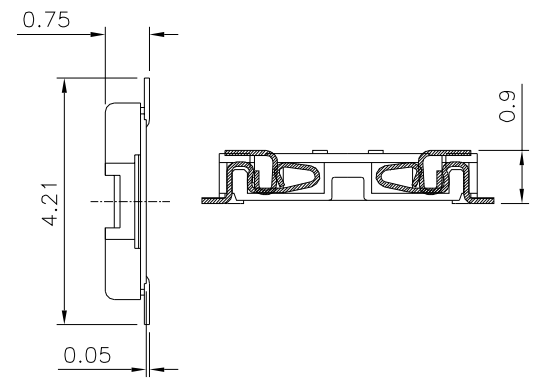


SPECIFICATION

- 1. Material&Finish**  
 Housing:LCP+30%G.F.(UL94V-0),Black  
 Terminal:Copper Alloy,Gold Flash  
           Over All,Over Nickel  
 Pad:Copper Alloy,Tin Plated  
           Over All,Over Nickel
- 2. Electrical Characteristics**  
 Current Rating:0.5A  
 Withstanding Voltage:100V AC For  
                                   1 Minute Min.  
 Contact Resistance:100 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.
- 3. Environmental Characteristics**  
 Operating Temperature:-35°C~+85°C
- 4. RoHS Compliant**

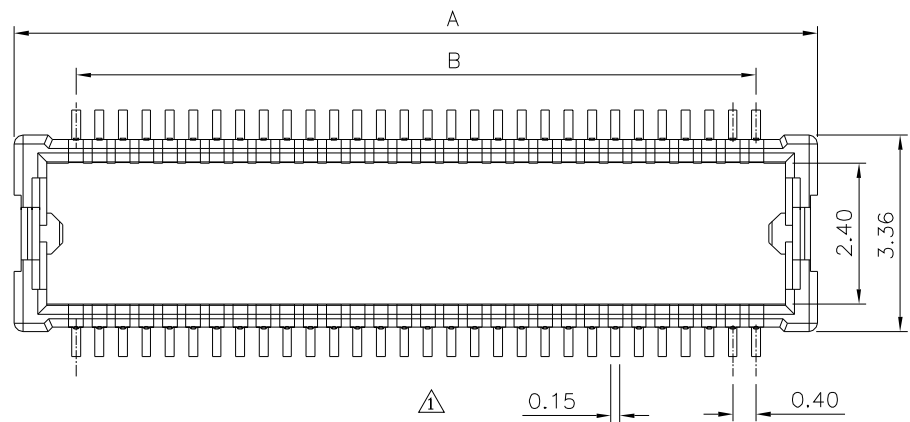

Recommended P.C.B. Layout  
(PCB Board Tolerance±0.03)

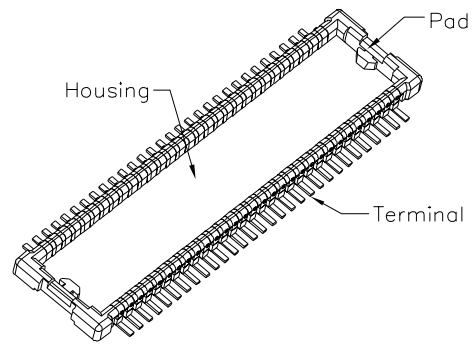

Pin	10	24	30	34	40	50	60	70	80
A	3.7	6.5	7.7	8.5	9.7	11.7	13.7	15.7	17.7
B	1.6	4.4	5.6	6.4	7.6	9.6	11.6	13.6	15.6

Pin	10	24	30	34	40	50	60	70	80
	/	5000	3000	/	5000	3000	/	/	/

Keyed "Q'ty/Reel" Are Tooled

Part No.(Male)	Part No.(Female)	Female Height	Stacking Height(H)
22553	22554	0.85	0.9

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±1° .X ±0.15 .X.* ±0.5° .XX ±0.10
22553		MEI		
		CHECKED BY		
HZF		DRAWING BY		
LZX		A1		UNIT mm
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	04/07/2023
△A0		NEW RELEASE	HZF	07/30/2022