

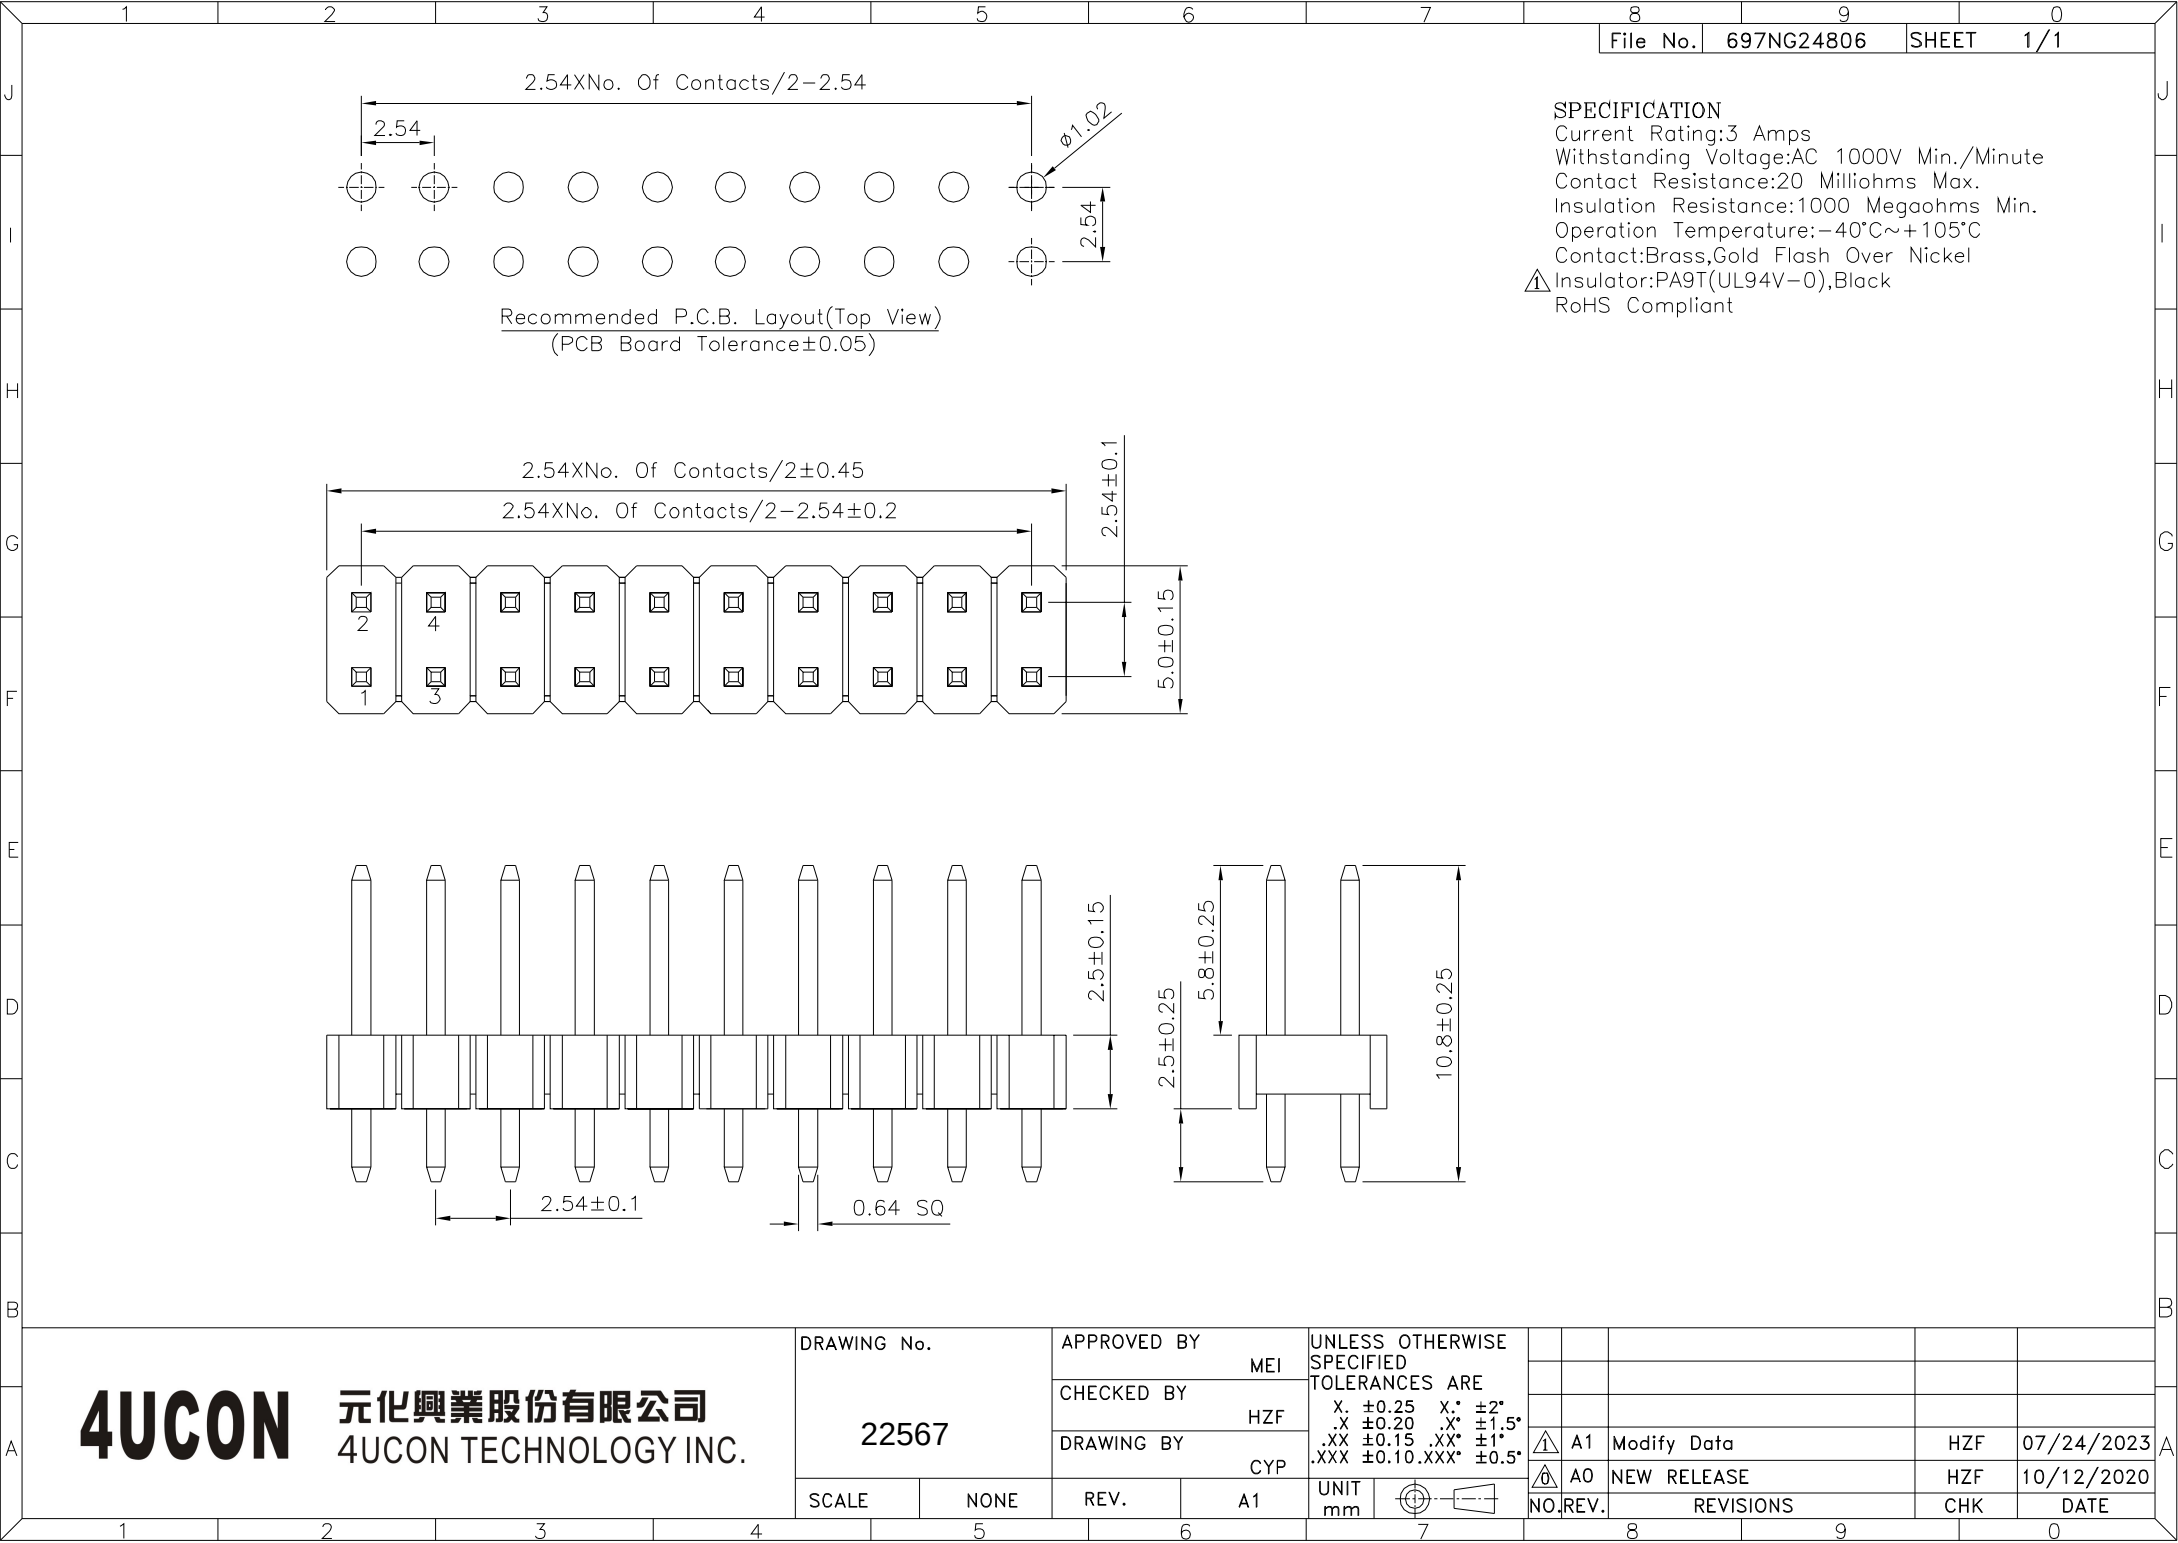


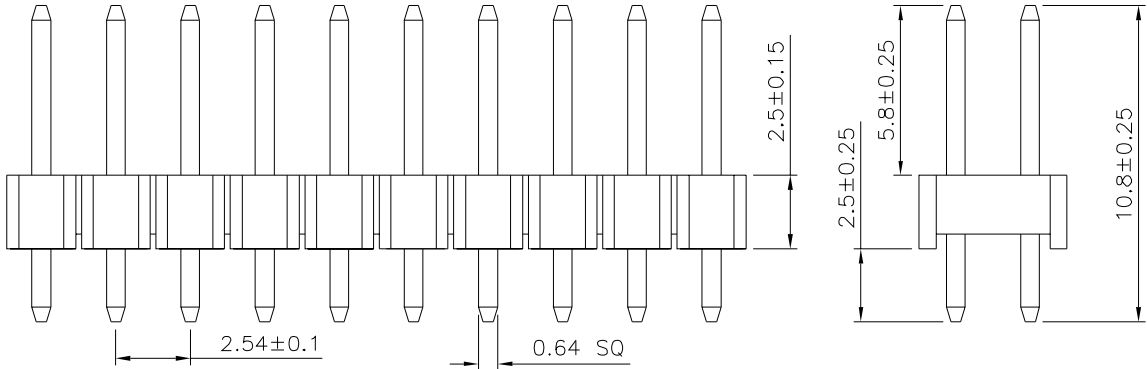

SPECIFICATION
Current Rating:3 Amps
Withstanding Voltage:AC 1000V Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
⚠ Insulator:PA9T(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

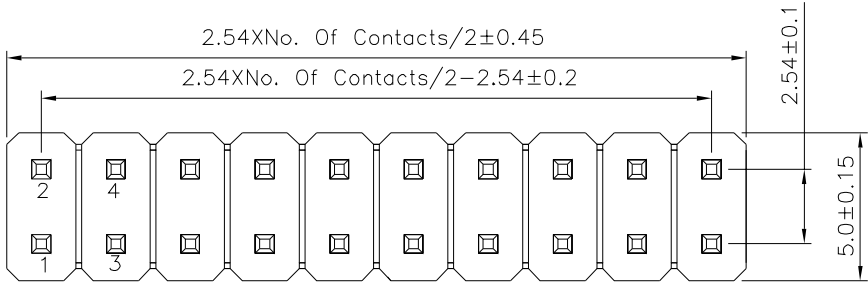

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
22567		HZF	
		DRAWING BY	
SCALE		CYP	
NONE		A1	
REV.		UNIT	
		mm	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
X.	±0.25	X.*	±2°
.X	±0.20	.X*	±1.5°
.XX	±0.15	.XX*	±1°
.XXX	±0.10	.XXX*	±0.5°

NO.		REV.		REVISIONS		CHK		DATE	
A1		Modify Data		HZF		07/24/2023			
A0		NEW RELEASE		HZF		10/12/2020			