


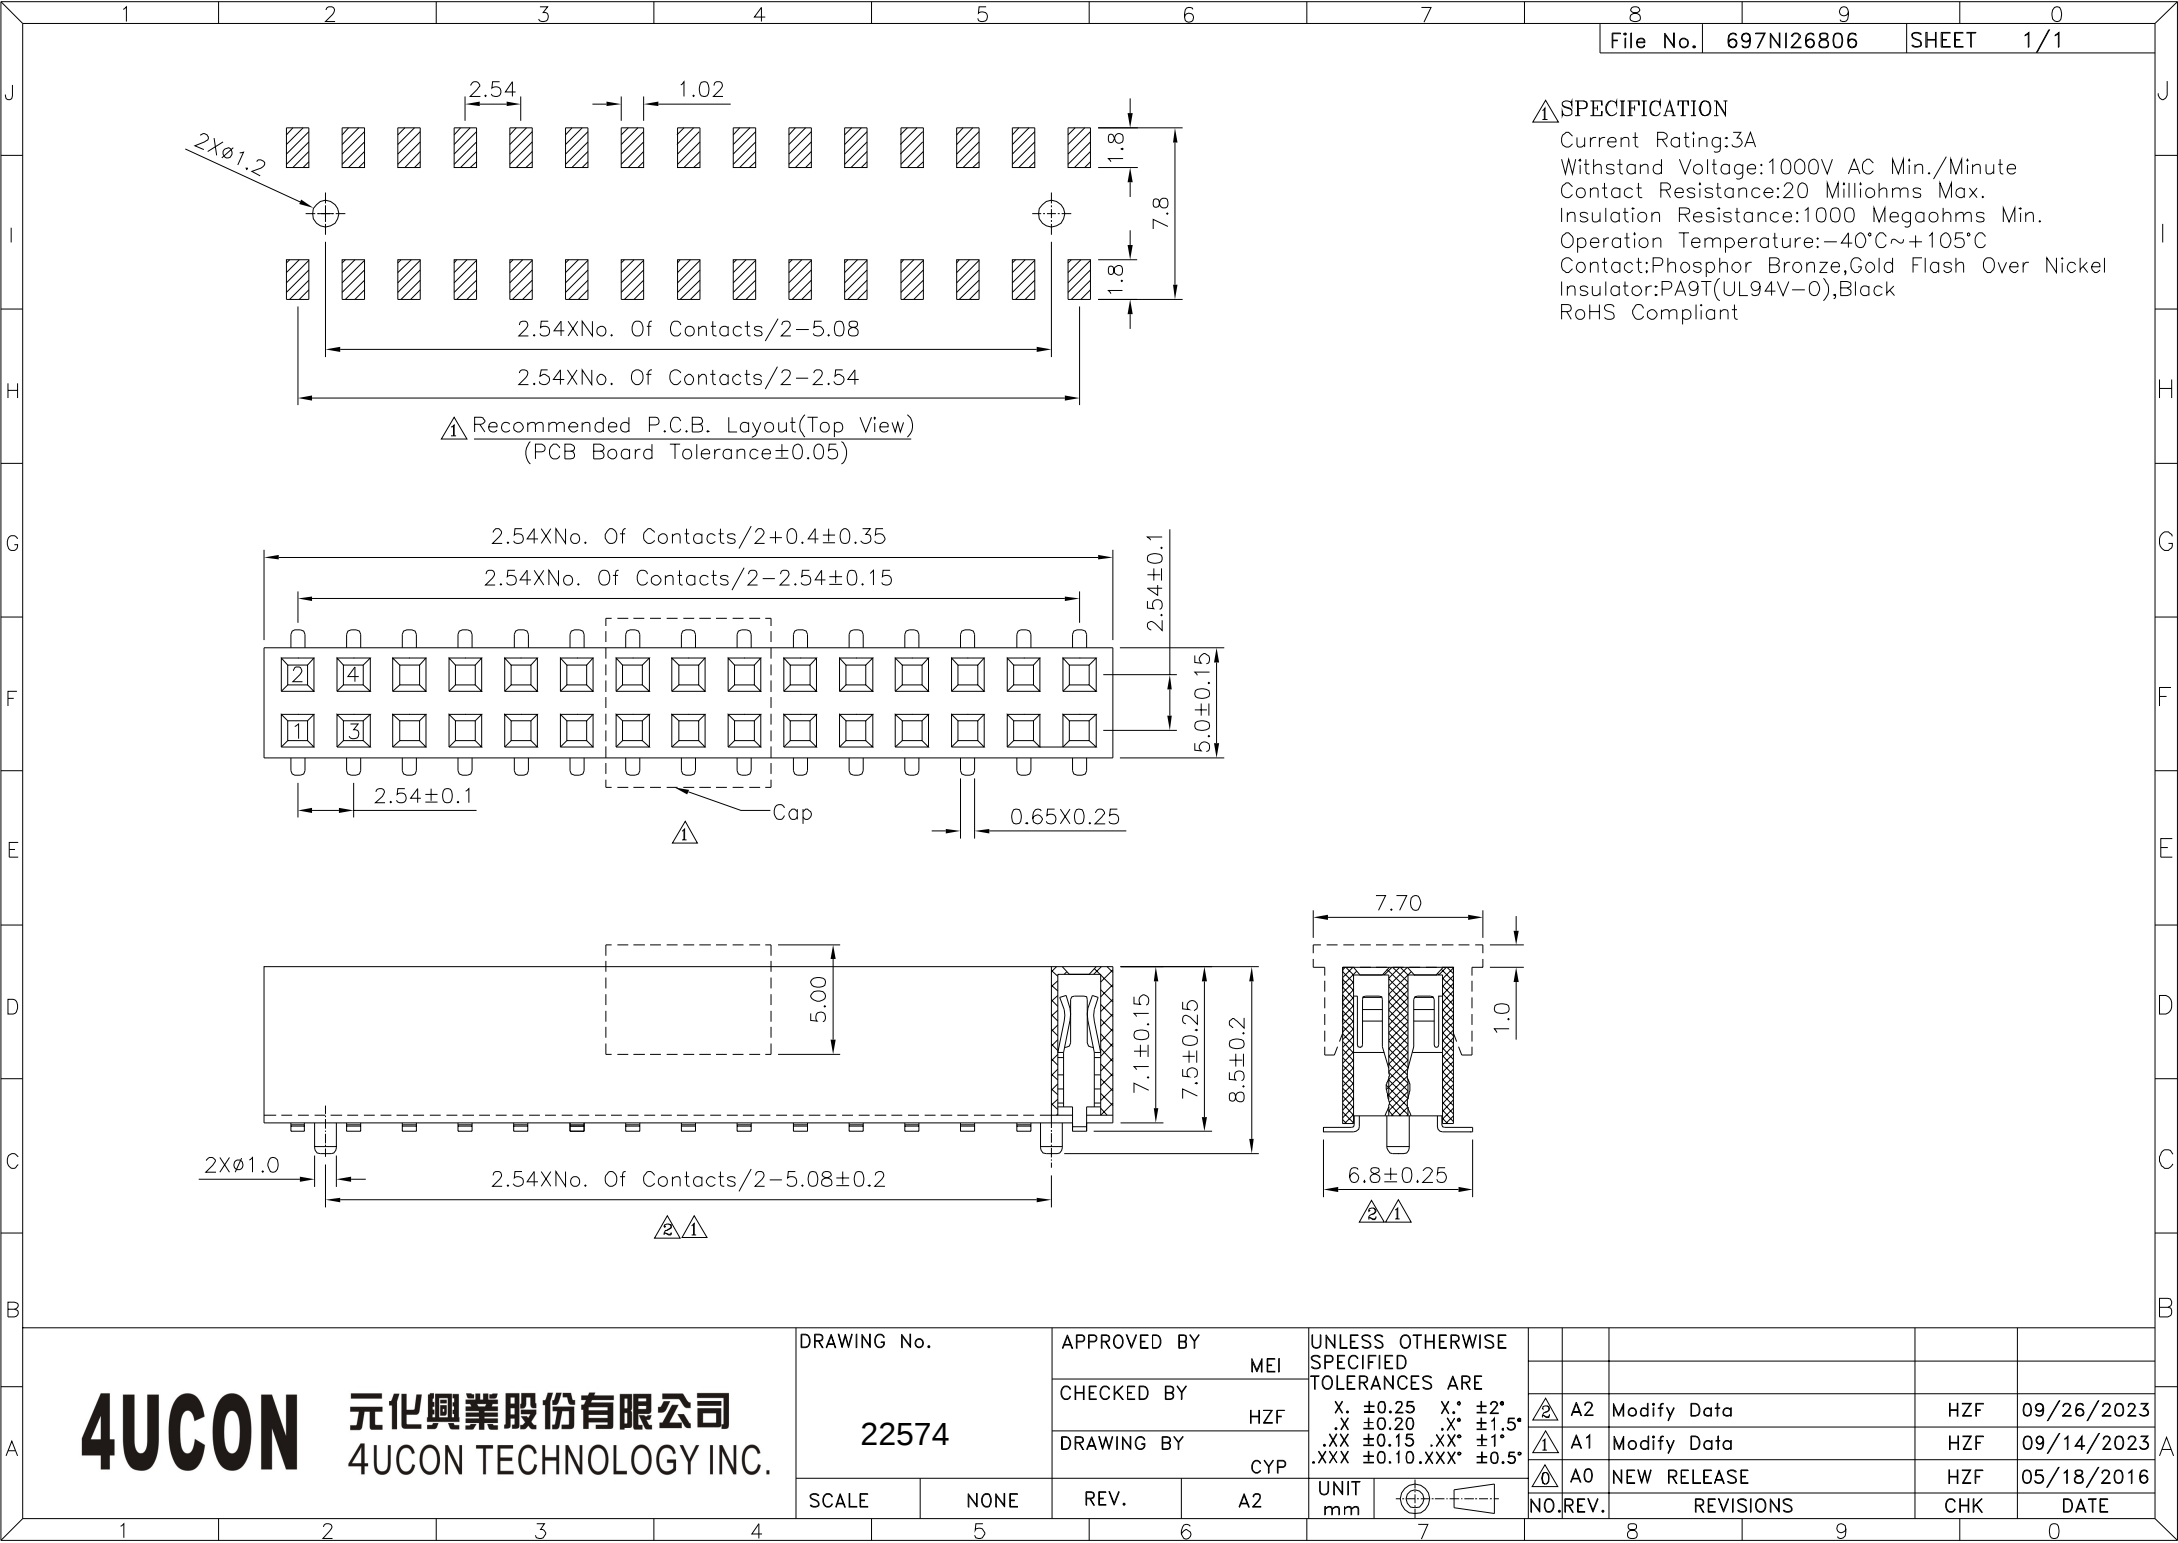

△ SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA9T(UL94V-O),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
22574		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X. ±0.25 X.* ±2°		△ A2	Modify Data	HZF	09/26/2023
.X ±0.20 .X.* ±1.5°		△ A1	Modify Data	HZF	09/14/2023
.XX ±0.15 .XX.* ±1°		△ A0	NEW RELEASE	HZF	05/18/2016
.XXX ±0.10 .XXX.* ±0.5°		NO. REV.	REVISIONS	CHK	DATE