

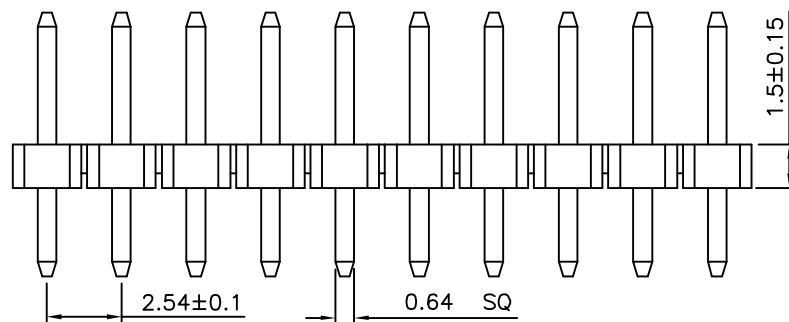


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

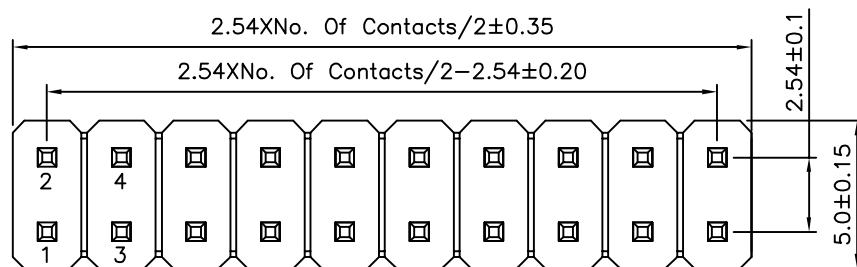

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22615

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^{\circ}$

.X ± 0.20 .X* $\pm 1.5^{\circ}$

.XX ± 0.15 .XX* $\pm 1^{\circ}$

.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT

mm

A0

NO.

REV.

NEW RELEASE

REVISIONS

CHK

HZF

DATE

11/30/2015