


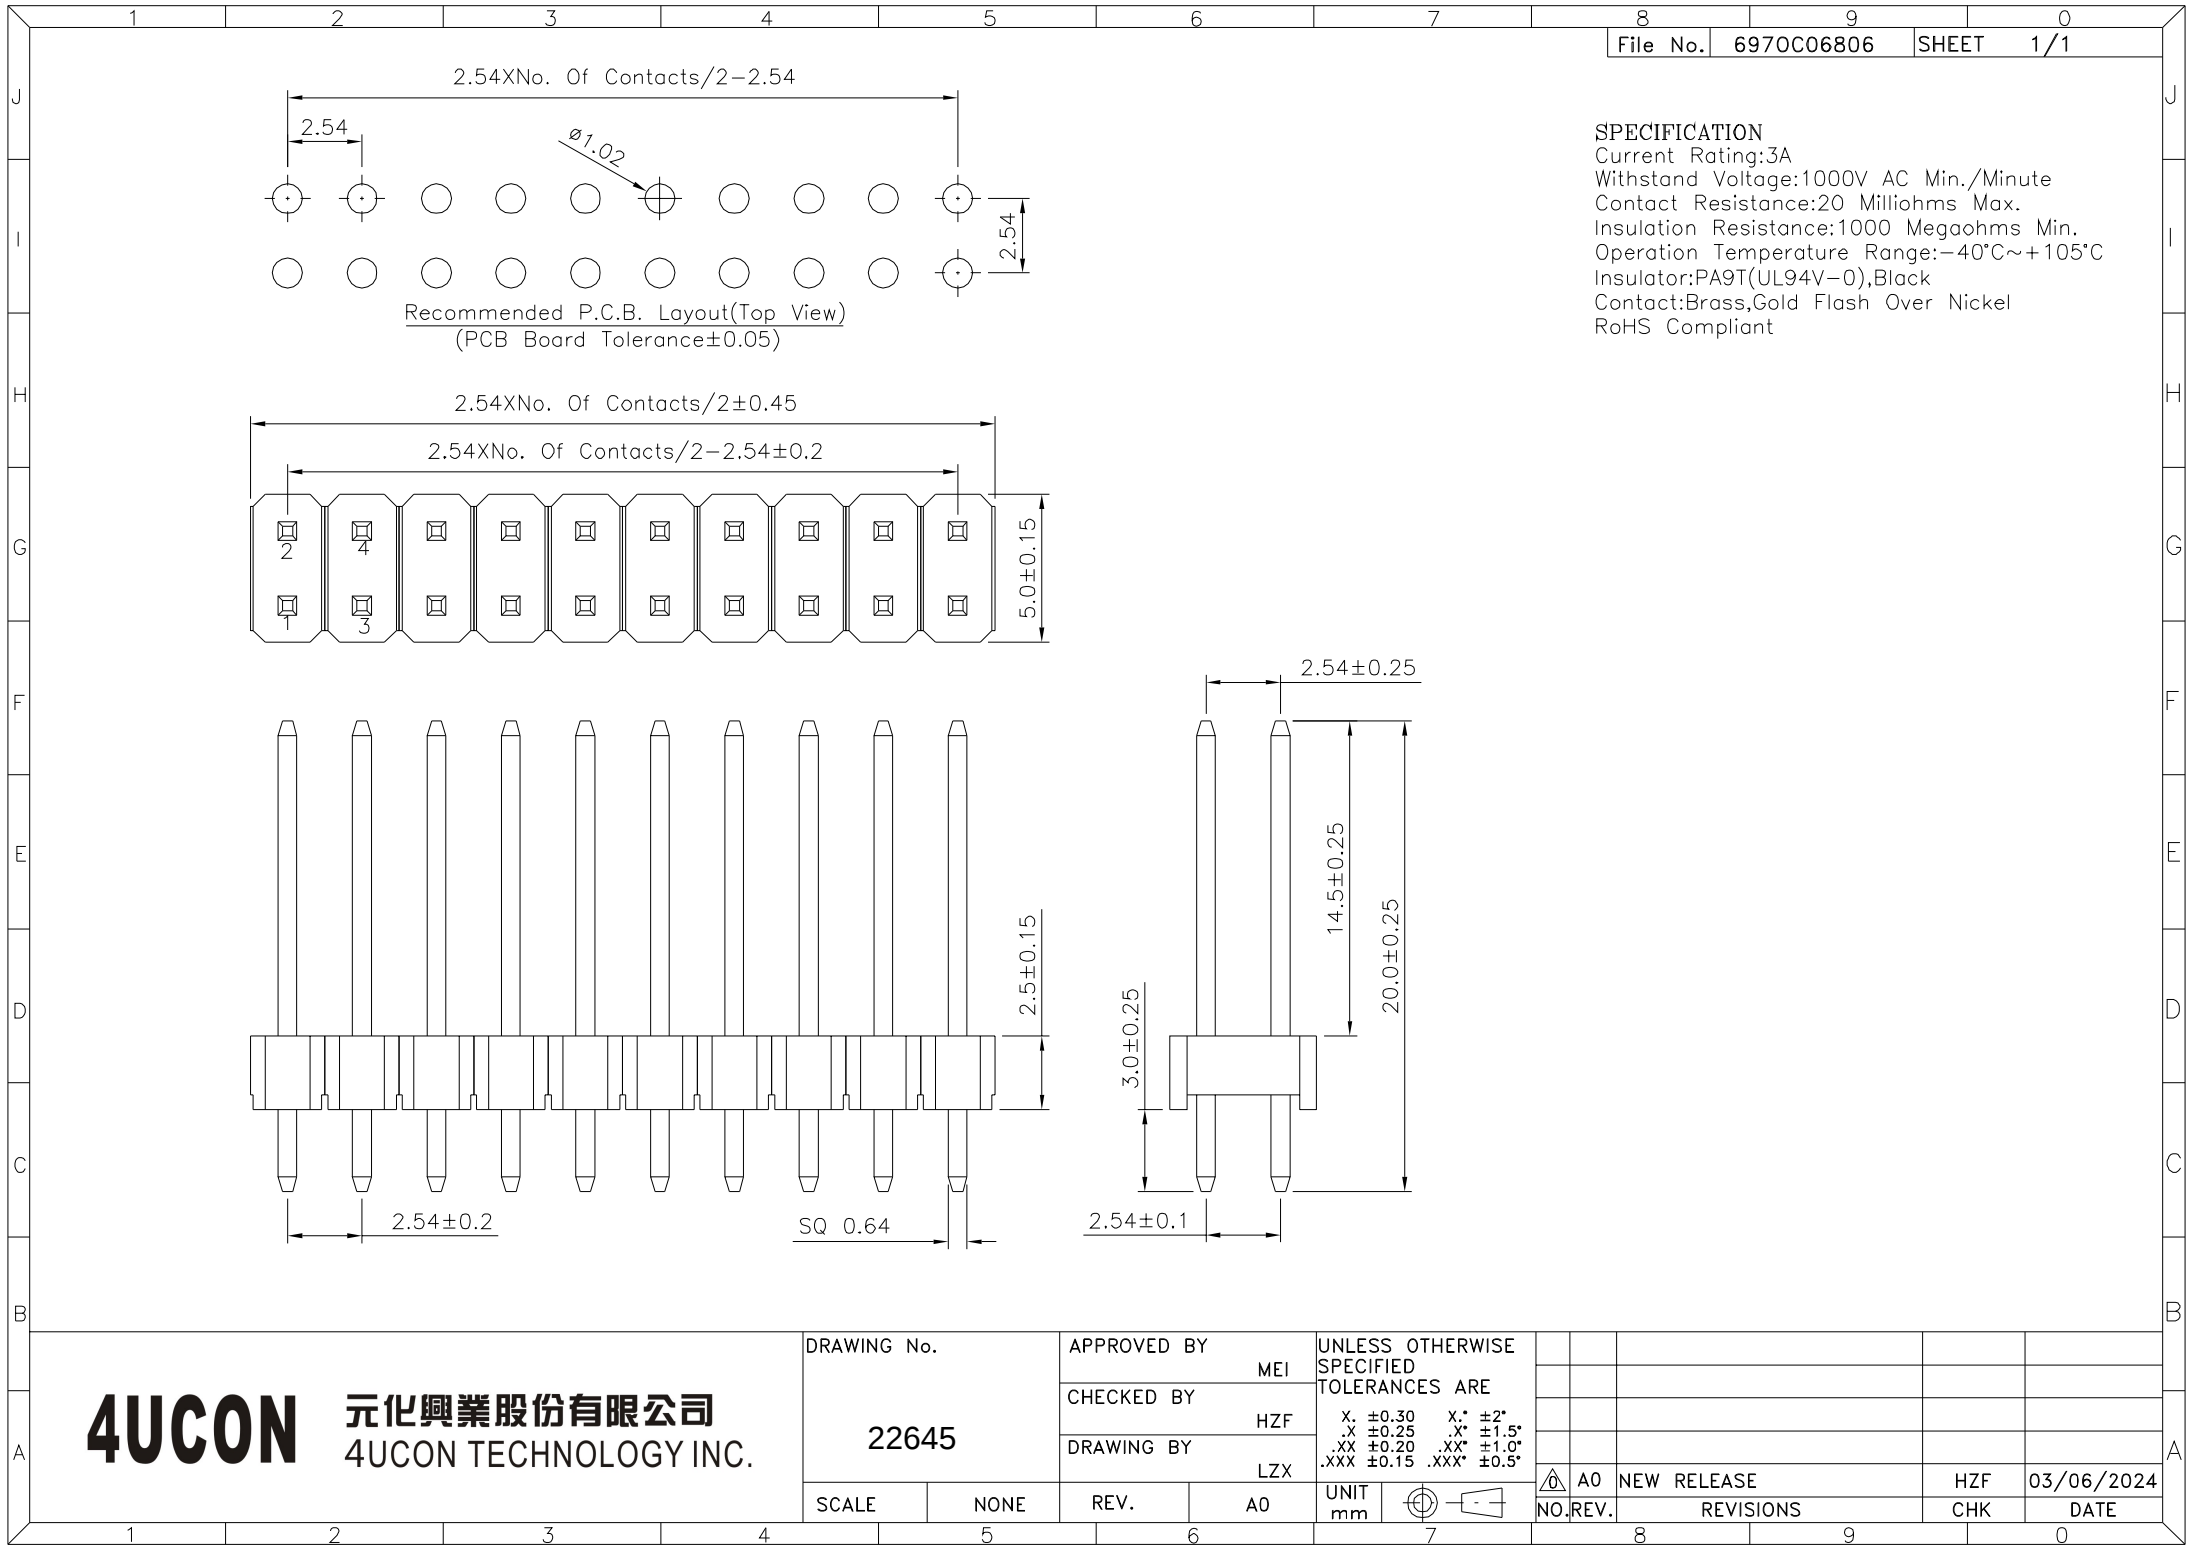

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature Range:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 22645		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X, ±0.30 X,* ±2* .X ±0.25 .X* ±1.5* .XX ±0.20 .XX* ±1.0* .XXX ±0.15 .XXX* ±0.5*						
		MEI								
		CHECKED BY								
		HZF								
DRAWING BY		LZX								
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE	HZF	03/06/2024
							NO.	REVISIONS	CHK	DATE

A0	NEW RELEASE	HZF	03/06/2024
NO.	REV.	REVISIONS	CHK
			DATE