
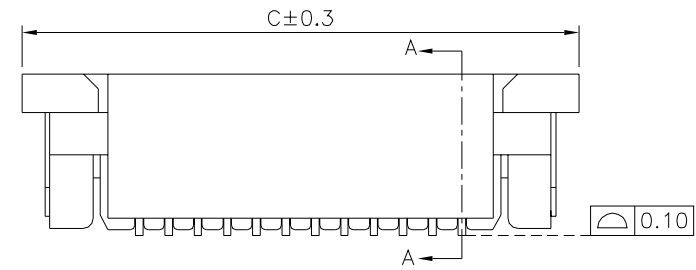

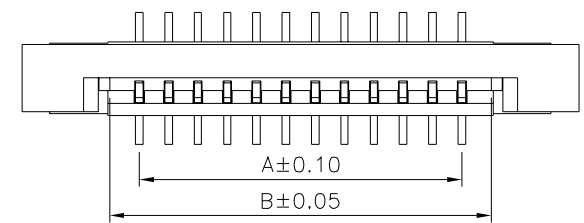




SPECIFICATION

- Material&Finish**
Housing:LCP(UL94V-0),White
Cover:LCP(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash
Over All,Over Nickel
- Electrical Characteristics**
Voltage Rating:125V AC/DC
Current Rating:1.0A AC/DC
- Environmental Characteristics**
Temperature Range:-20°C~+85°C
- RoHS Compliant**

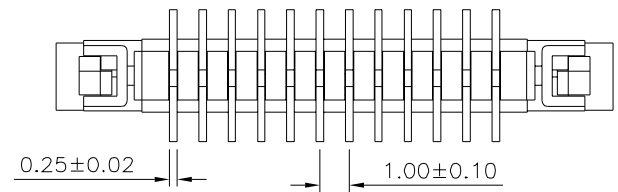

Pin	A	B	C	Pin	A	B	C
*4	3.00	5.07	11.10	*23	22.00	24.07	30.10
*5	4.00	6.07	12.10	*24	23.00	25.07	31.10
*6	5.00	7.07	13.10	*25	24.00	26.07	32.10
*7	6.00	8.07	14.10	*26	25.00	27.07	33.10
*8	7.00	9.07	15.10	*27	26.00	28.07	34.10
*9	8.00	10.07	16.10	*28	27.00	29.07	35.10
*10	9.00	11.07	17.10	29	28.00	30.07	36.10
*11	10.00	12.07	18.10	*30	29.00	31.07	37.10
*12	11.00	13.07	19.10	31	30.00	32.07	38.10
*13	12.00	14.07	20.10	*32	31.00	33.07	39.10
*14	13.00	15.07	21.10	33	32.00	34.07	40.10
*15	14.00	16.07	22.10	34	33.00	35.07	41.10
*16	15.00	17.07	23.10	35	34.00	36.07	42.10
*17	16.00	18.07	24.10	36	35.00	37.07	43.10
*18	17.00	19.07	25.10	37	36.00	38.07	44.10
*19	18.00	20.07	26.10	38	37.00	39.07	45.10
*20	19.00	21.07	27.10	39	38.00	40.07	46.10
*21	20.00	22.07	28.10	40	39.00	41.07	47.10
*22	21.00	23.07	29.10				

Note:The Mark Of "*" Are Tooled~

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANG. ±2°
22649		MEI		
		HZF		
		DRAWING BY		UNIT mm
		LZX		
SCALE	NONE	REV.	A0	NO. REV.

△ A0	NEW RELEASE	HZF	09/16/2023
	REVISIONS	CHK	DATE