
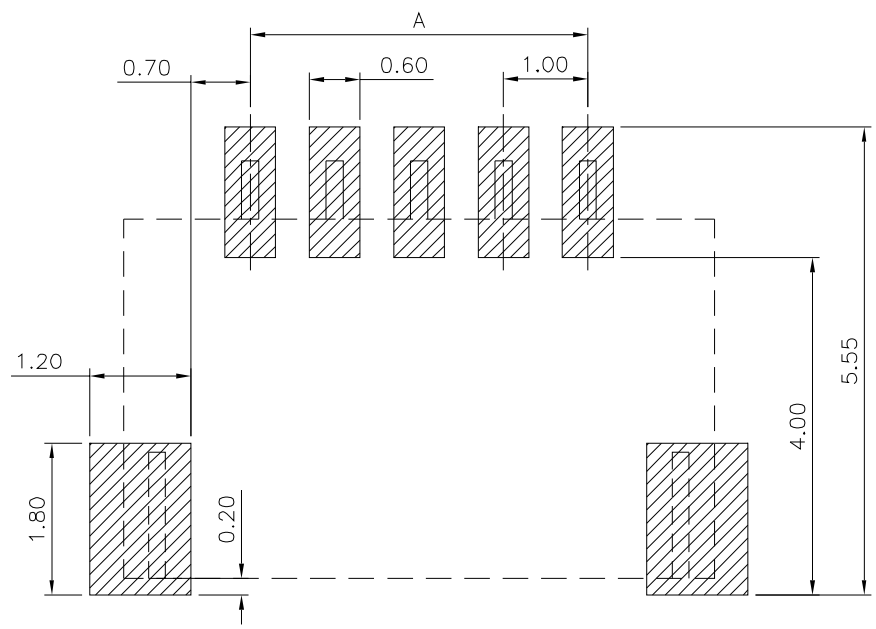
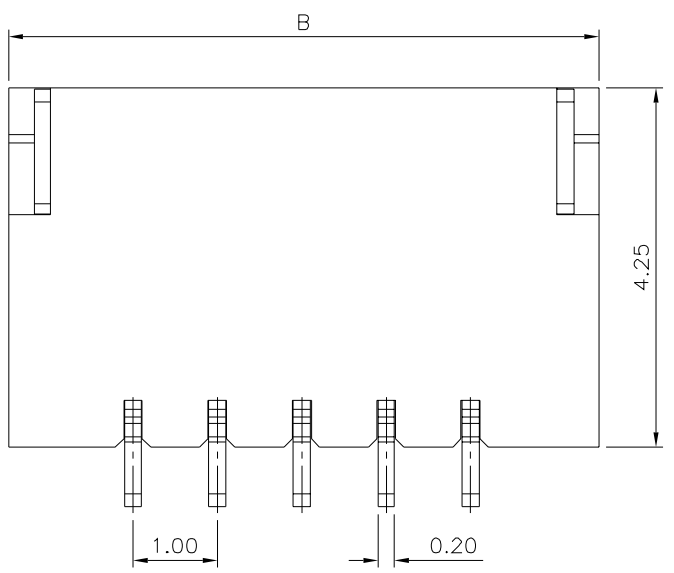


**SPECIFICATION**  
 Current Rating:1A AC,DC  
 Voltage Rating:50V AC,DC  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 Temperature Range:-40°C~+105°C  
 Contact:Phosphor Bronze,Tin Plated Over Nickel  
 Fitting Nail:Brass,Tin Plated Over Nickel  
 Insulator:PA9T(UL94V-0)  
 RoHS Compliant

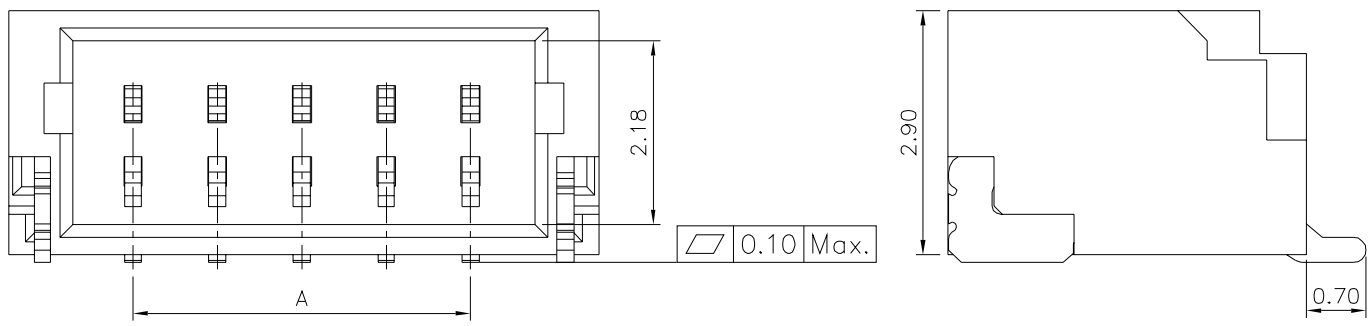

Recommended P.C.B. Layout  
 Total Tolerance±0.05

Pin	A	B
02	1.00	4.00
03	2.00	5.00
04	3.00	6.00
05	4.00	7.00
06	5.00	8.00
07	6.00	9.00
08	7.00	10.00
09	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00
17	16.00	19.00
18	17.00	20.00
19	18.00	21.00
20	19.00	22.00

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±2°
22675		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	B0	
				NO. REV.

△ B0	NEW RELEASE	HZF	03/06/2022
NO. REV.	REVISIONS	CHK	DATE