

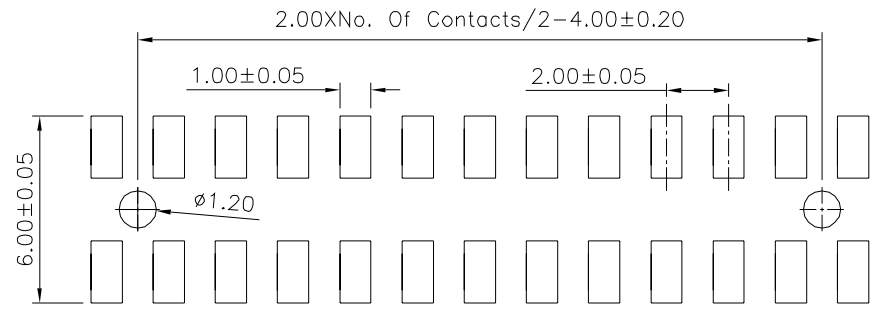
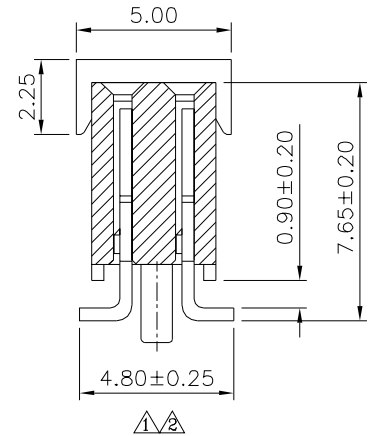


**SPECIFICATION**  
 ⚠️ Current Rating:2A  
 Dielectric Withstand:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Housing:PA6T+30%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

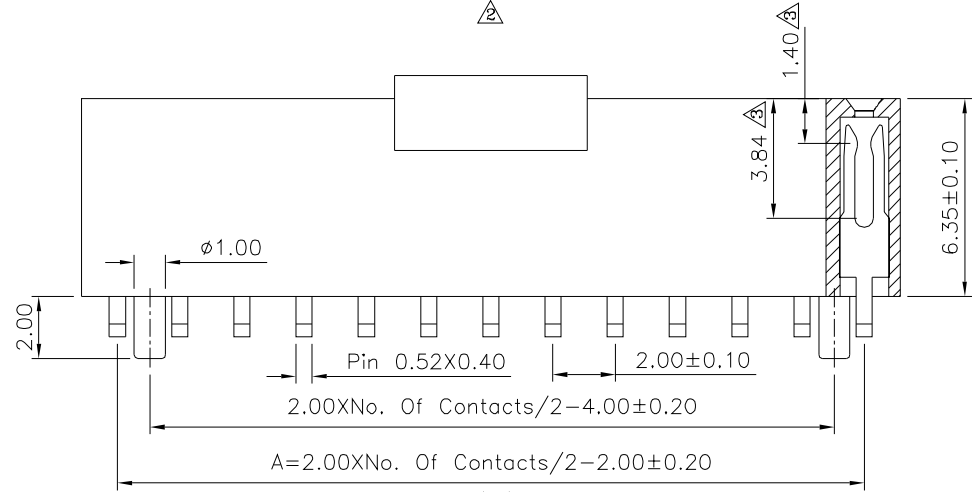

Recommended P.C.B. Layout

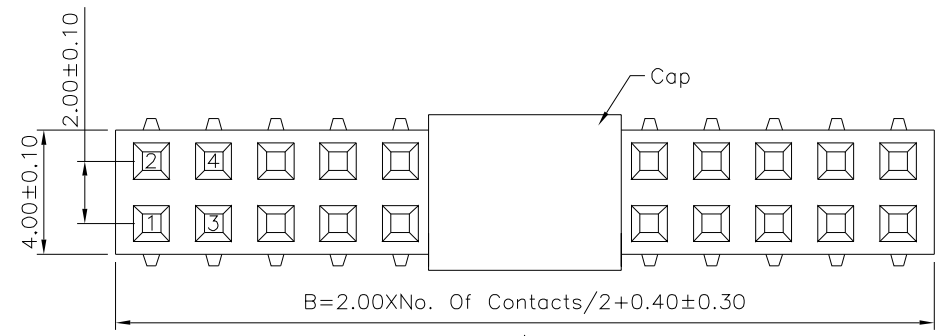

Pin	A	B	Pin	A	B
6	4.00	6.40	44	42.00	44.40
8	6.00	8.40	46	44.00	46.40
10	8.00	10.40	48	46.00	48.40
12	10.00	12.40	50	48.00	50.40
14	12.00	14.40	52	50.00	52.40
16	14.00	16.40	54	52.00	54.40
18	16.00	18.40	56	54.00	56.40
20	18.00	20.40	58	56.00	58.40
22	20.00	22.40	60	58.00	60.40
24	22.00	24.40	62	60.00	62.40
26	24.00	26.40	64	62.00	64.40
28	26.00	28.40	66	64.00	66.40
30	28.00	30.40	68	66.00	68.40
32	30.00	32.40	70	68.00	70.40
34	32.00	34.40	72	70.00	72.40
36	34.00	36.40	74	72.00	74.40
38	36.00	38.40	76	74.00	76.40
40	38.00	40.40	78	76.00	78.40
42	40.00	42.40	80	78.00	80.40

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20
22693		EMILY		
		CHECKED BY		
		HZF		
DRAWING BY		HAO		
SCALE	NONE	REV.	A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠️	A3	Modify Data	HZF	06/22/2024
⚠️	A2	Modify Data	HZF	08/11/2015
⚠️	A1	Modify Data	HZF	03/28/2015
⚠️	A0	NEW RELEASE	HZF	10/01/2013