
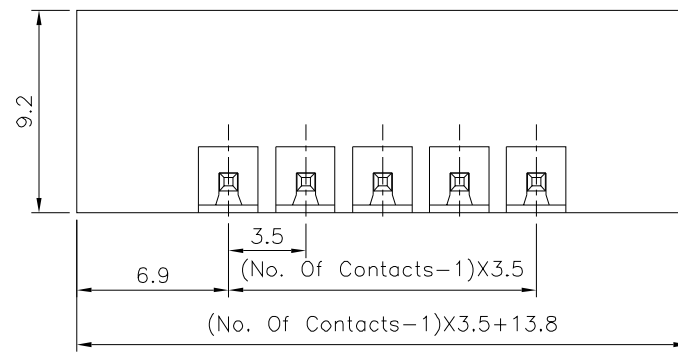



△ SPECIFICATION

Voltage Rating:300V AC
 Current Rating:12 Amp/Way Max.
 Withstanding Voltage:2500V AC For 1 Minute
 Test Time=60 Sec/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C
 5 Seconds Max.

△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
 Solder Pin:Copper Alloy,Tin Plated
 Metal Nut:Copper Alloy
 RoHS Compliant

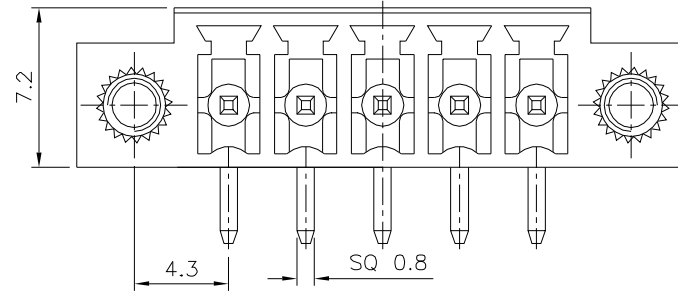

DRAWING No. **22720**

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 X.° ±1°

SCALE NONE

REV. A2

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	04/29/2015
△ A1		Modify Data	HZF	10/12/2011
△ A0		NEW RELEASE	HZF	01/26/2010

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.