
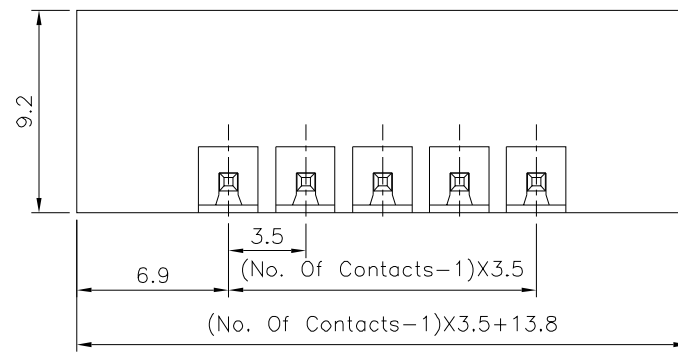



**△ SPECIFICATION**

Voltage Rating:300V AC  
 Current Rating:12 Amp/Way Max.  
 Withstanding Voltage:2500V AC For 1 Minute  
 Test Time=60 Sec/1 PCS  
 Operation Temperature:-40°C~+105°C  
 Soldering Reliability:Test Temperature=250°C±10°C  
 5 Seconds Max.

△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green  
 Solder Pin:Copper Alloy,Tin Plated  
 Metal Nut:Copper Alloy  
 RoHS Compliant

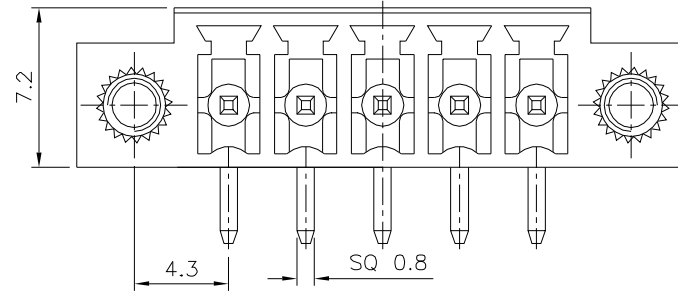

DRAWING No. <b>22720</b>		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 X.° ±1°

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	04/29/2015
△	A1	Modify Data	HZF	10/12/2011
△	A0	NEW RELEASE	HZF	01/26/2010

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

