
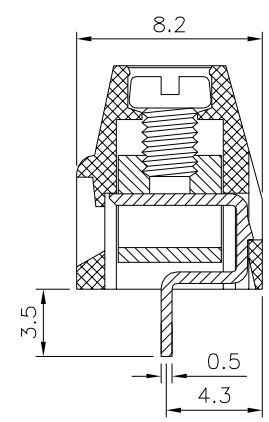
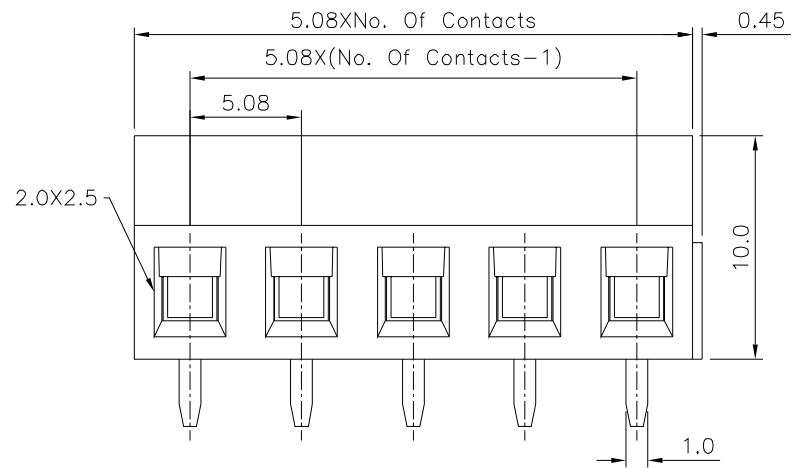


Recommended P.C.B. Layout

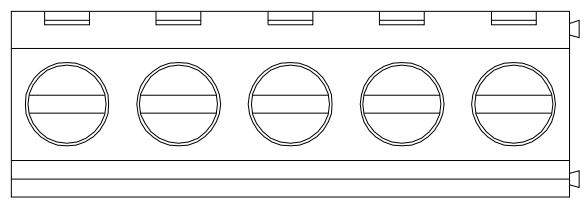

**SPECIFICATION**

Current Rating:16A/Way Max.  
 Voltage Rating:300V AC  
 Withstanding Voltage:2500V AC For 1 Minute  
 Contact Resistance:20 Milliohms Max.  
 Wire Range:16~30 AWG  
 Torque:4.5 Kgf.cm/M3  
 Operation Temperature:-40°C~+105°C  
 Contact:Copper Alloy,Nickel Plated  
 Solder Pin:Copper Alloy,Tin Plated  
 Terminal Screw:Steel,Galvanized With Cr3+ Plated  
 Insulator:Polyamide(UL94V-0),Green  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 22788

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY LSM

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°

SCALE NONE REV. B0 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
	B0	Modify Data	HZF	05/01/2024
	B0	NEW RELEASE	HZF	05/01/2024