

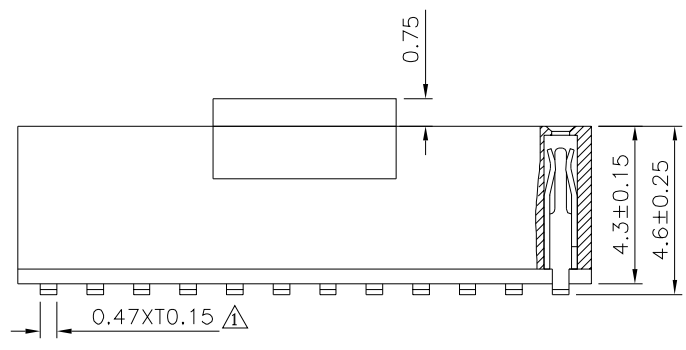


Recommended P.C.B. Layout
Tolerance:±0.05(Top View)

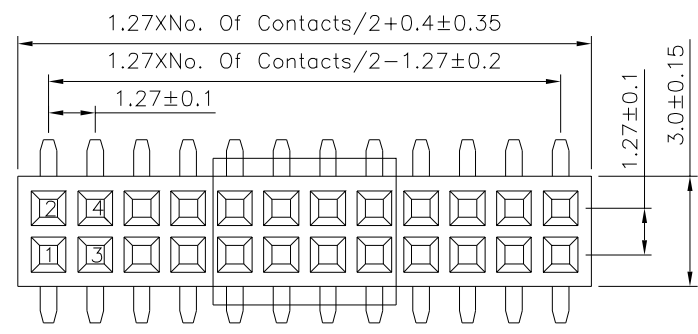

SPECIFICATION

Current Rating:1A
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 ⚠ Insulator:PA9T(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
22810

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.25 X.* ±2"
 .X ±0.20 .X* ±1.5"
 .XX ±0.15 .XX* ±1"
 .XXX ±0.10 .XXX* ±0.5"

SCALE NONE REV. A1

UNIT	mm				
NO.	REV.	REVISIONS	CHK	DATE	
⚠	A1	Modify Data	HZF	05/23/2024	
⚠	A0	NEW RELEASE	HZF	11/20/2020	