
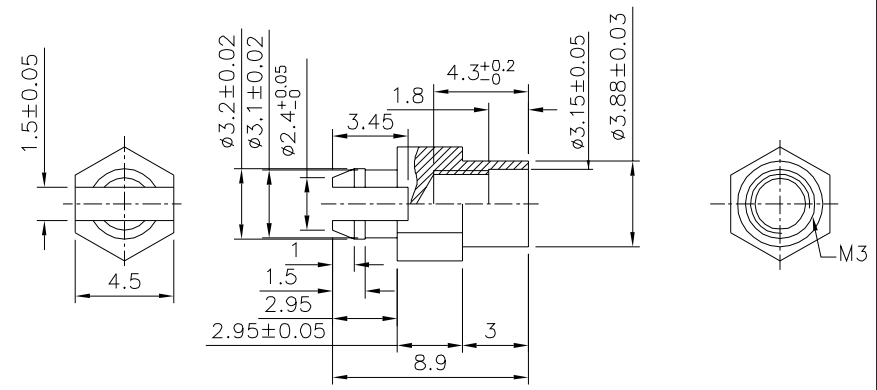

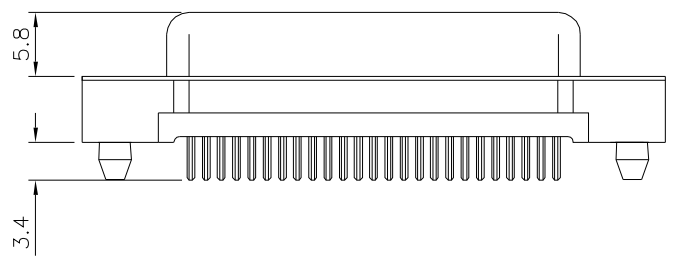
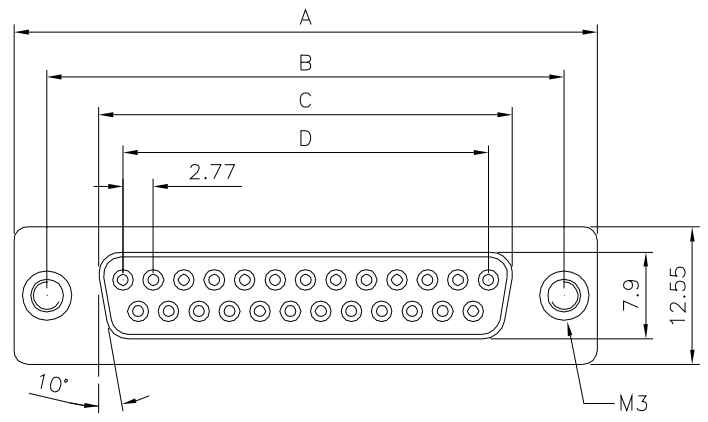


**SPECIFICATION**

Current Rating:3A  
 Voltage Rating:250V AC/RMS 60Hz  
 Contact Resistance:20 Milliohms Max. At 1A DC  
 Insulation Resistance:1000 Megaohms At 500V DC  
 Dielectric Withstand Voltage:1000V AC/RMS 60Hz  
 For 1 Minute  
 Insulator:PBT+G.F.(UL94V-0)  
 Contact:Brass  
 Shell:Steel,Tin Plated Over Copper  
 Boardlock:Brass,Nickel Plated  
 RoHS Compliant

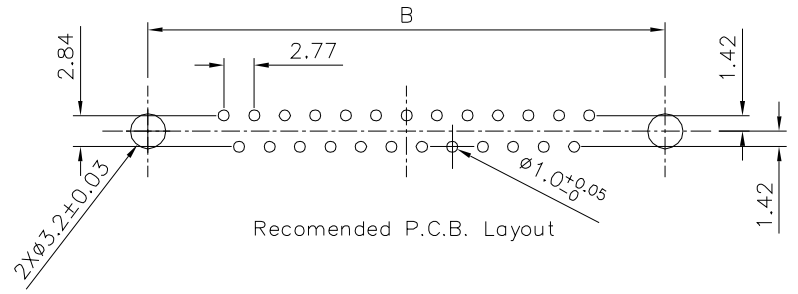

Pin	A	B	C	D
09	30.81	24.99	16.33	11.08
15	39.20	33.30	24.70	19.39
25	53.05	47.04	38.40	33.24
37	69.40	63.50	54.80	49.86

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.38 X.* ±3* .X ±0.25 .X.* ±1.0* .XX ±0.13
22819		MEI		
		CHECKED BY		
HZF		DRAWING BY		
LSM		A0		UNIT
SCALE	NONE	REV.	A0	mm

NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	08/12/2024
REVISIONS				