


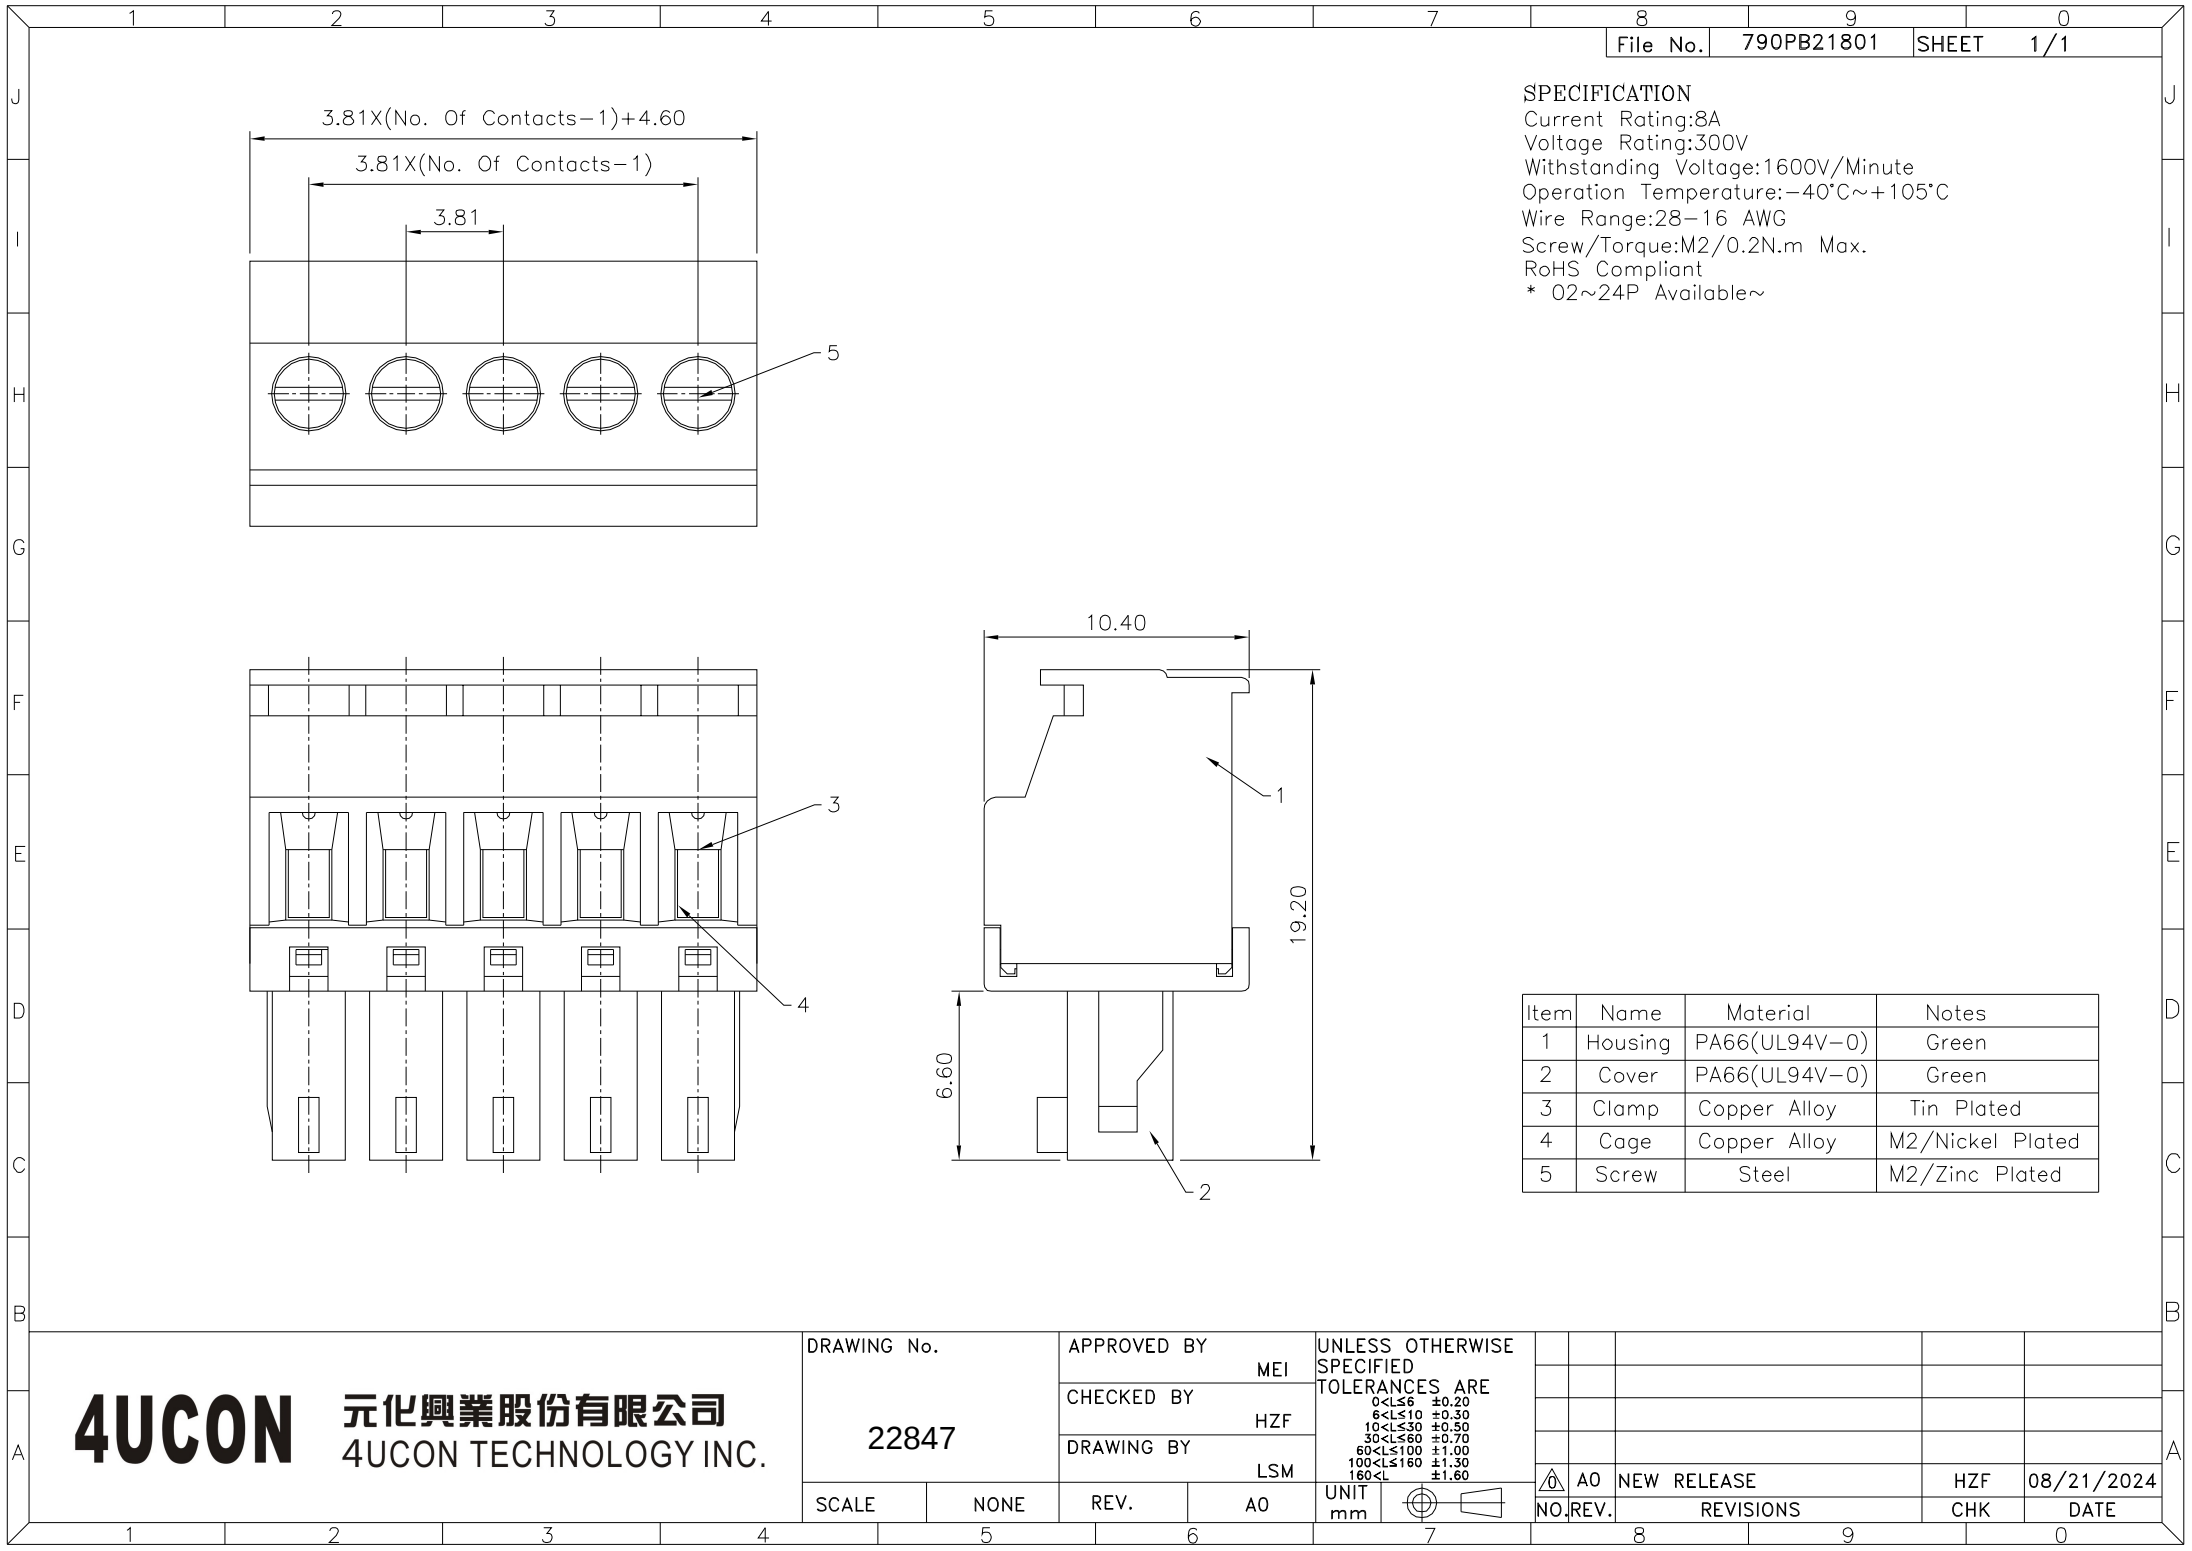

SPECIFICATION
Current Rating:8A
Voltage Rating:300V
Withstanding Voltage:1600V/Minute
Operation Temperature:-40°C~+105°C
Wire Range:28-16 AWG
Screw/Torque:M2/0.2N.m Max.
RoHS Compliant
* 02~24P Available~

Item	Name	Material	Notes
1	Housing	PA66(UL94V-0)	Green
2	Cover	PA66(UL94V-0)	Green
3	Clamp	Copper Alloy	Tin Plated
4	Cage	Copper Alloy	M2/Nickel Plated
5	Screw	Steel	M2/Zinc Plated