
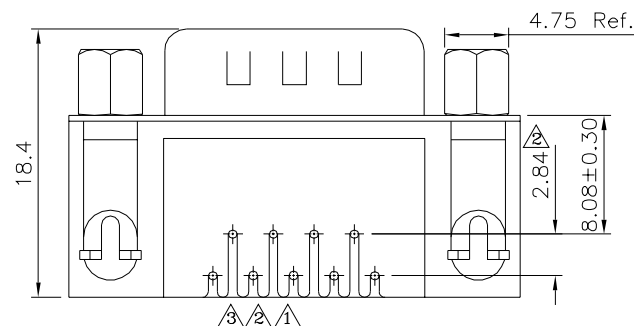
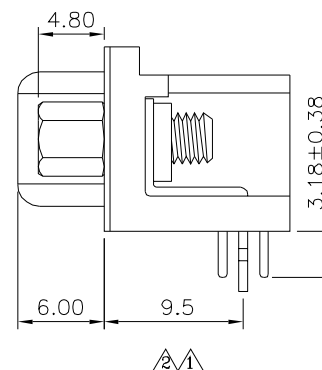
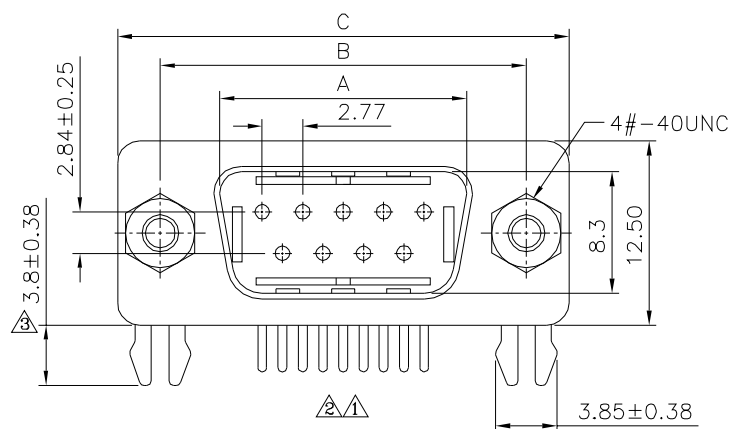


△△ SPECIFICATION

Current Rating:5A
 Insulation Resistance:1000 Megohms Min. At 500V DC
 Withstanding Voltage:1000V Per Minute
 Contact Resistance:30 Milliohms Max.10 Sec.
 Operating Temperature:-55°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Shell:Steel,Nickel Plated Over All
 Square Rivet:Copper Alloy,Nickel Plated Over All
 Ground:Steel,Tin Plated On Solder Tails,Over Nickel
 Screw:Steel,Nickel Plated Over All
 RoHS Compliant

△△ Recommended P.C.B. Layout

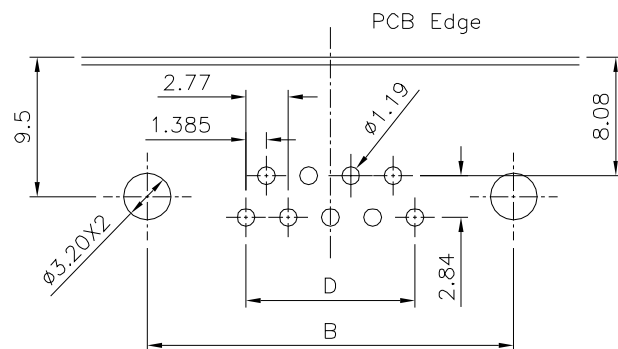

Pin	A±0.20	B±0.25	C±0.38	D
9	16.92	24.99	30.80	11.08
15	25.25	33.32	39.10	19.39
25	38.96	47.04	53.00	33.24
37	55.42	63.50	69.32	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22966

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.30

.XXX ±0.15

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	09/03/2025
△2	A2	Modify Data	HZF	08/27/2025
△1	A1	Modify Data	HZF	03/27/2018
△0	A0	NEW RELEASE	HZF	10/16/2006