
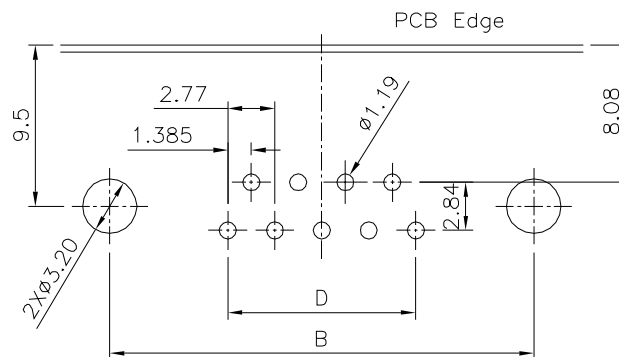
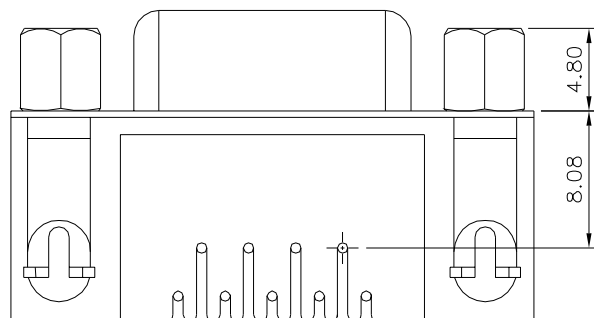
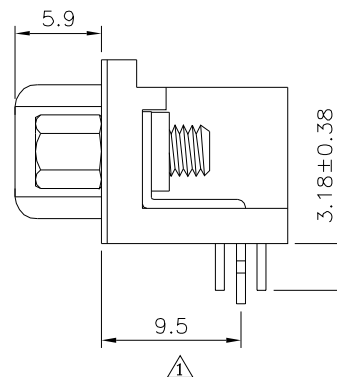


△△ SPECIFICATION

Current Rating:5A
Insulation Resistance:1000 Megohms Min. At 500V DC
Withstanding Voltage:1000V Per Minute
Contact Resistance:30 Milliohms Max.10 Sec.
Operating Temperature:-55°C~+105°C
Insulator:PBT(UL94V-0),Black
Contact:Brass,Gold Flash On Contact Area,Tin
Plated On Solder Tails,Over Nickel
Shell:Steel,Nickel Plated Over All
Square Rivet:Copper Alloy,Nickel Plated Over All
Ground:Steel,Tin Plated On Solder Tails,Over Nickel
Screw:Steel,Nickel Plated Over All
RoHS Compliant

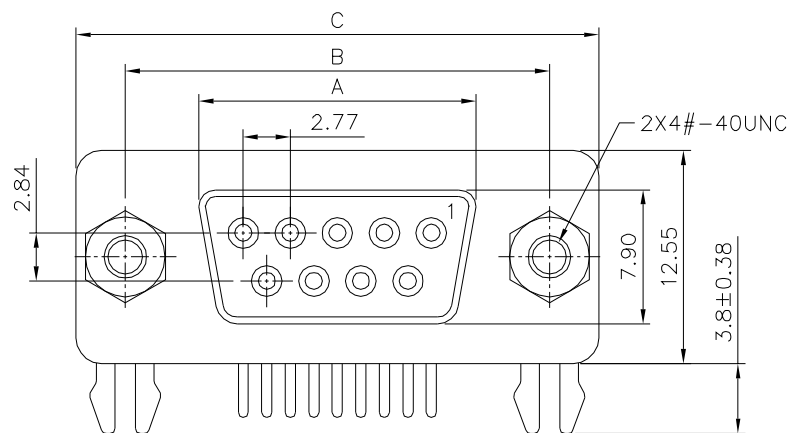

Pin	A±0.20	B±0.25	C±0.38	D
9	16.33	24.99	30.80	11.08
15	24.66	33.32	39.10	19.39
25	38.38	47.04	53.00	33.24
37	54.84	63.50	69.32	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22969

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ .X ±0.38

△ .XX ±0.25

△ .XXX ±0.15

UNIT
mm

△ A3

Modify Data

HZF

09/03/2025

△ A2

Modify Data

HZF

08/27/2025

△ A1

Modify Data

HZF

12/05/2019

△ A0

NEW RELEASE

SHIN

02/20/2007

NO. REV.

REVISIONS

CHK

DATE