


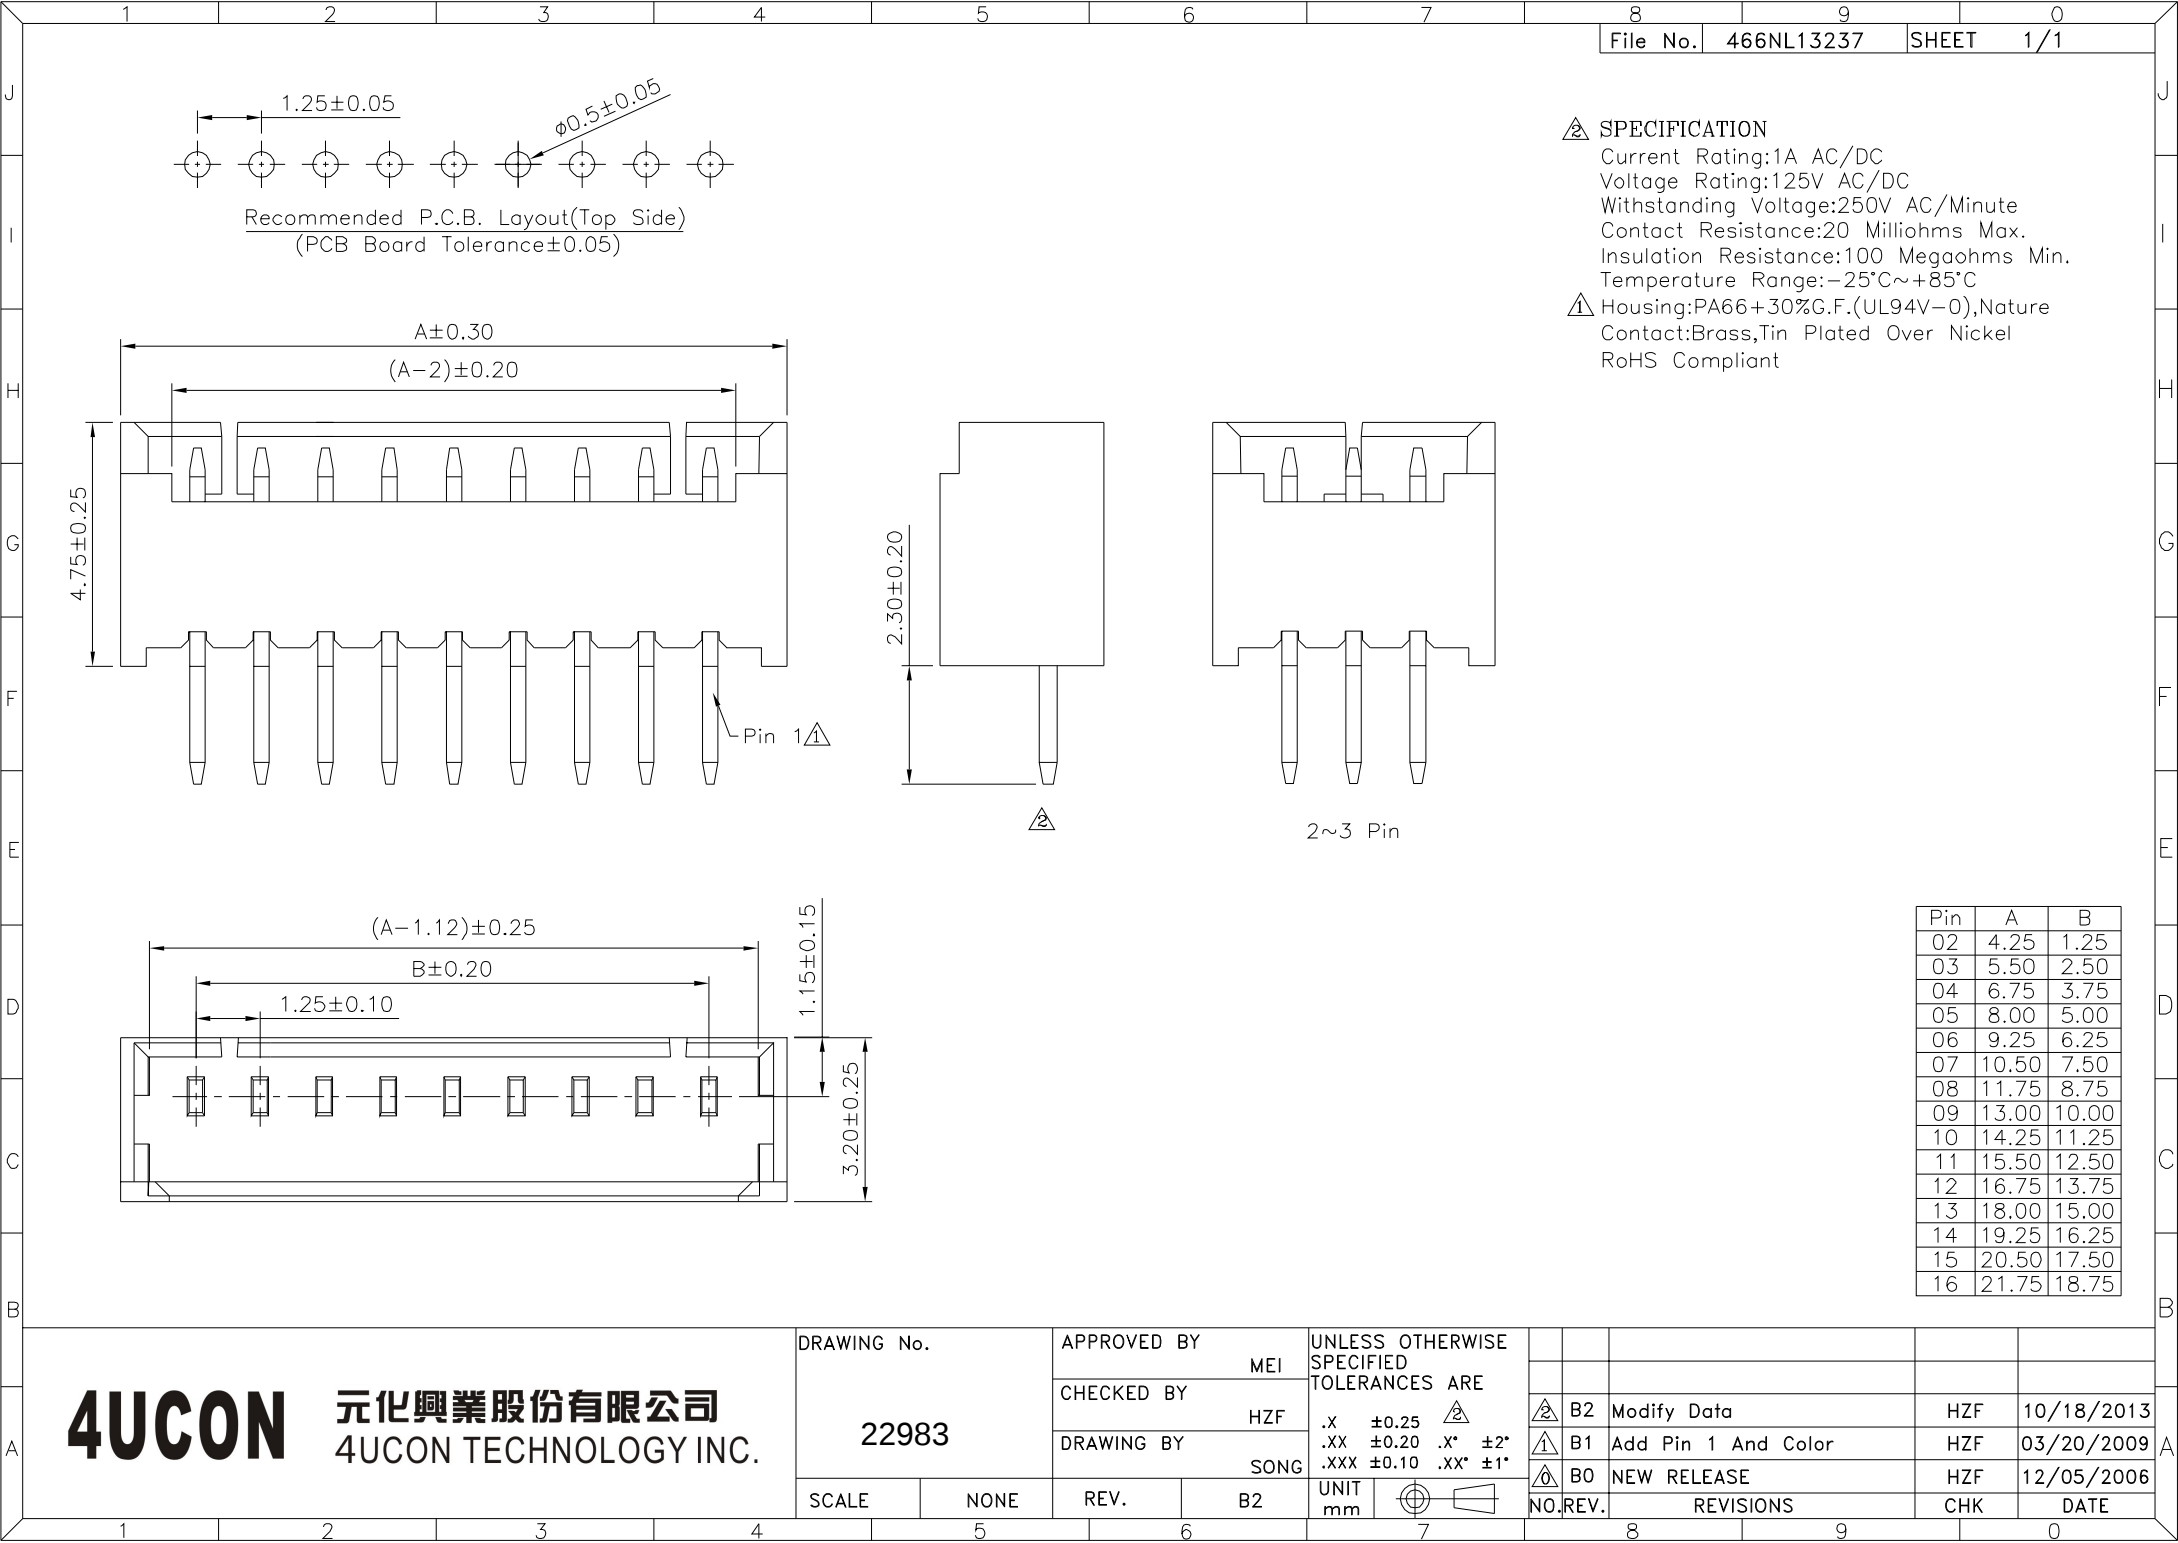

△ SPECIFICATION
Current Rating:1A AC/DC
Voltage Rating:125V AC/DC
Withstanding Voltage:250V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Temperature Range:-25°C~+85°C
⚠ Housing:PA66+30%G.F.(UL94V-0),Nature
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
22983		HZF	
		DRAWING BY	
		SONG	
SCALE	NONE	REV.	B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
.X	±0.25	△			
.XX	±0.20	.X*	±2*		
.XXX	±0.10	.XX*	±1*		
UNIT	mm	⊕			
NO.	REV.	REVISIONS		CHK	DATE
△	B2	Modify Data		HZF	10/18/2013
⚠	B1	Add Pin 1 And Color		HZF	03/20/2009
⚠	B0	NEW RELEASE		HZF	12/05/2006