


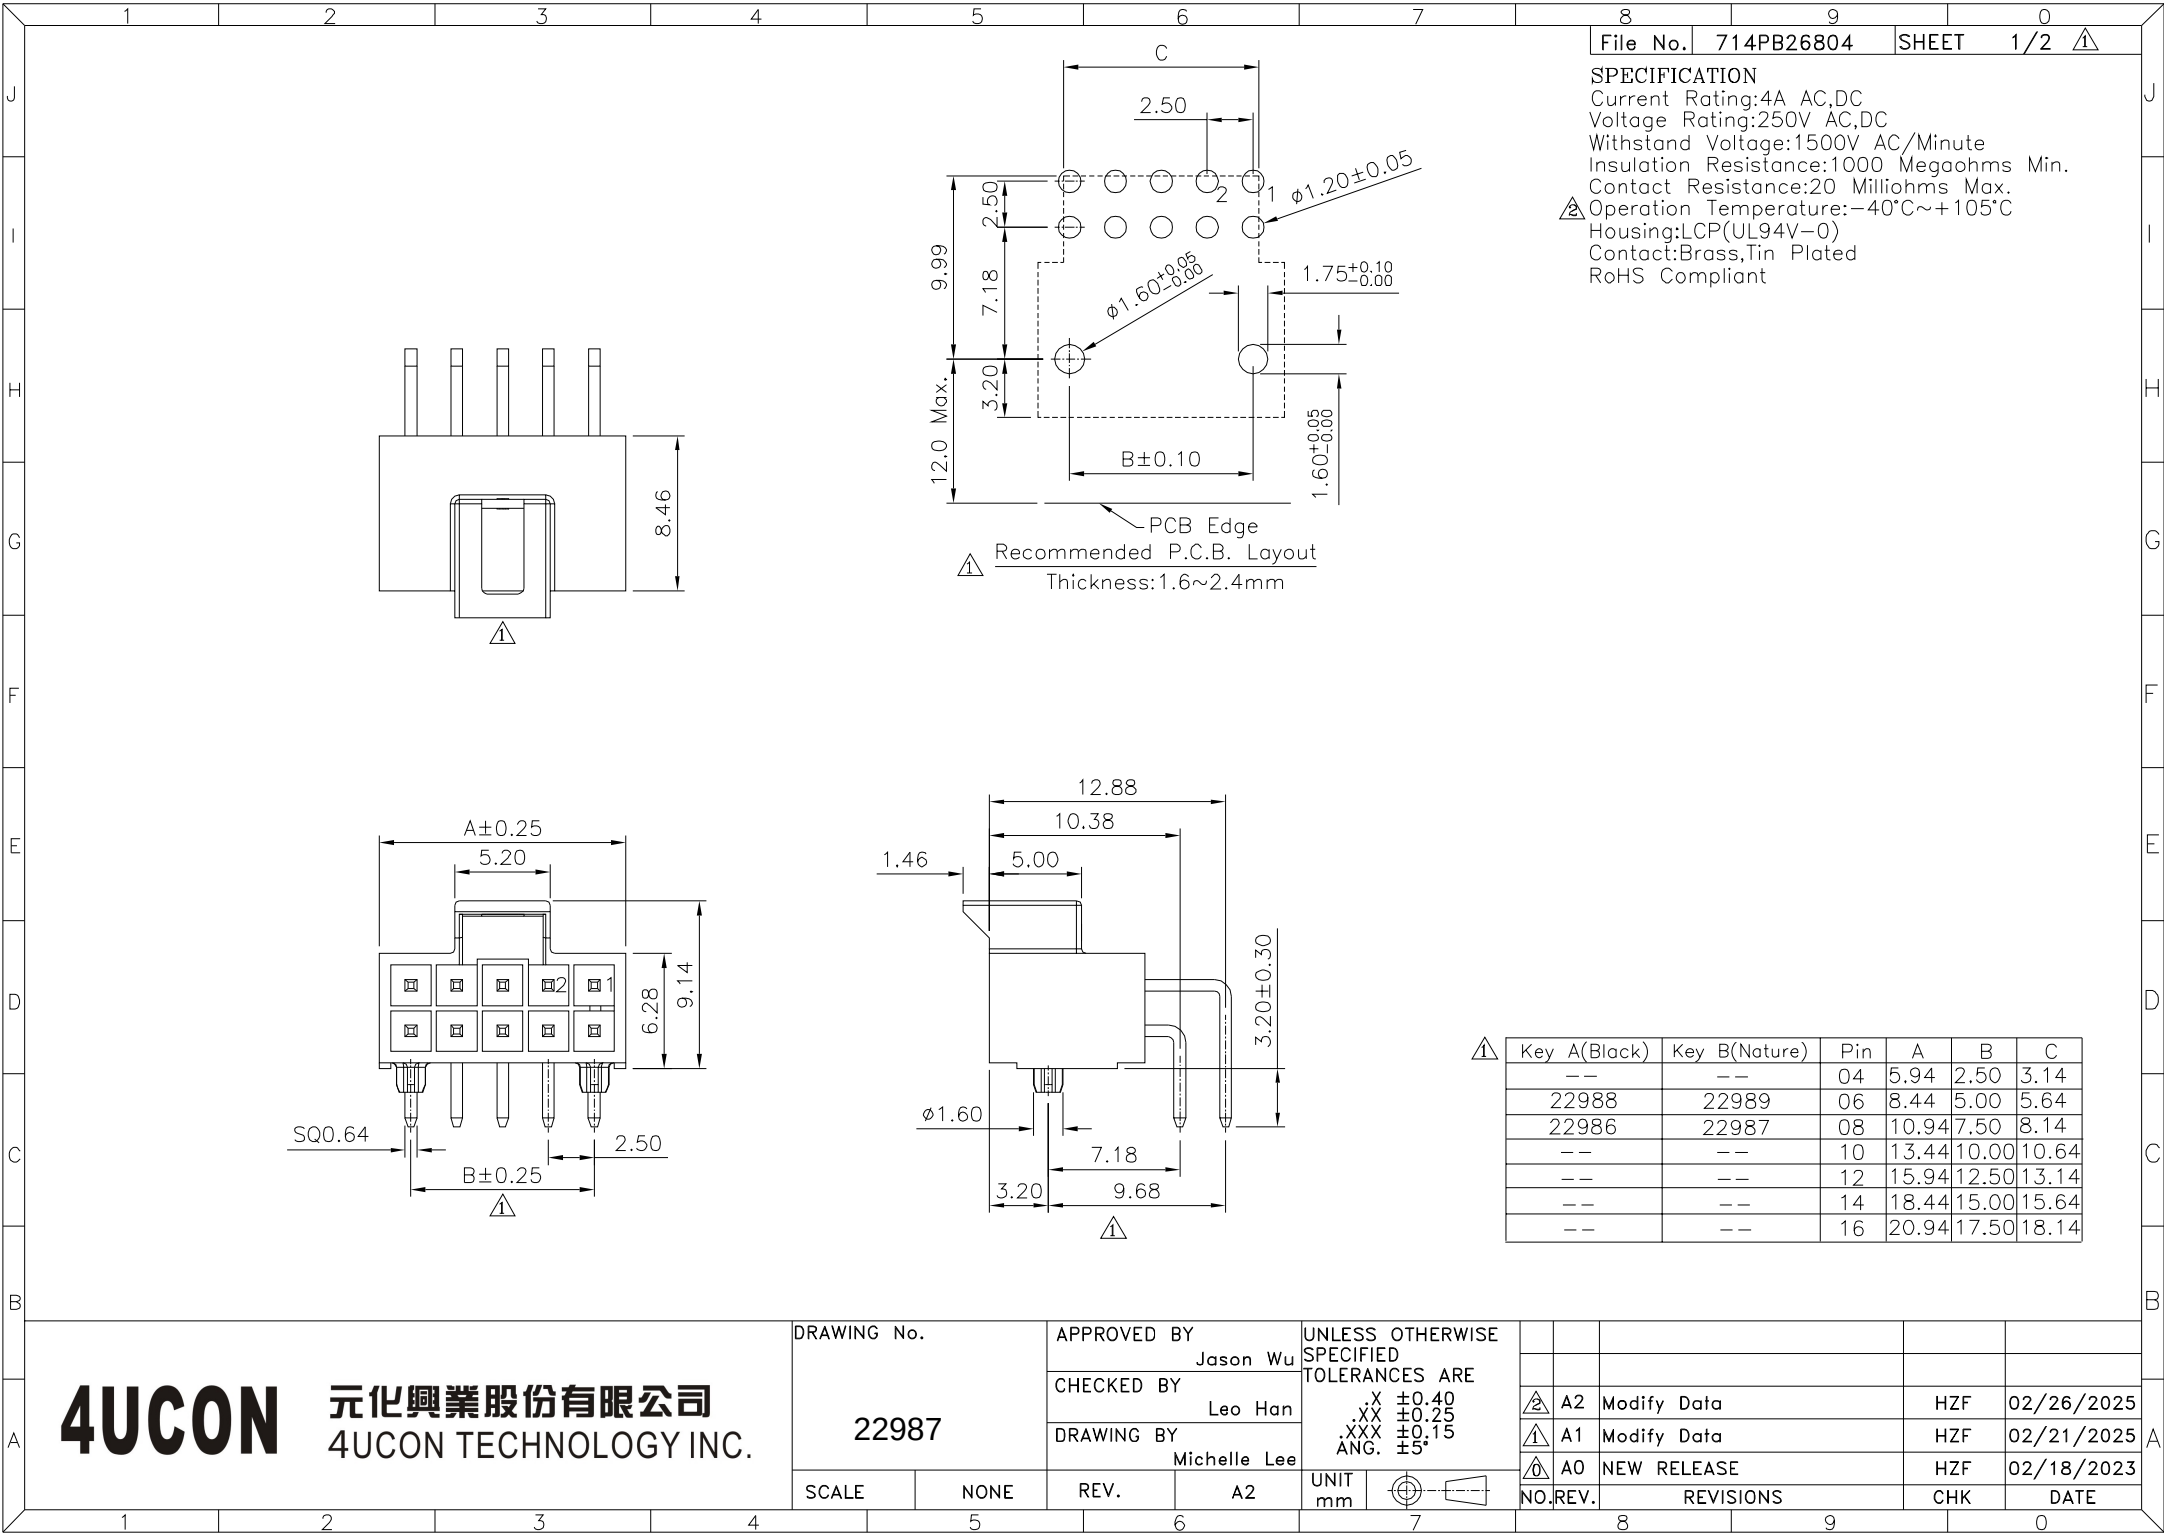

SPECIFICATION
Current Rating:4A AC,DC
Voltage Rating:250V AC,DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
Housing:LCP(UL94V-0)
Contact:Brass,Tin Plated
RoHS Compliant

Key	A(Black)	Key B(Nature)	Pin	A	B	C
--	--	--	04	5.94	2.50	3.14
22988	22989	06	8.44	5.00	5.64	
22986	22987	08	10.94	7.50	8.14	
--	--	10	13.44	10.00	10.64	
--	--	12	15.94	12.50	13.14	
--	--	14	18.44	15.00	15.64	
--	--	16	20.94	17.50	18.14	

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 22987
APPROVED BY Jason Wu
CHECKED BY Leo Han
DRAWING BY Michelle Lee
SCALE NONE REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X ±0.40
XX ±0.25
XXX ±0.15
ANG. ±5°
UNIT mm
NO. REV. REVISIONS CHK DATE

