
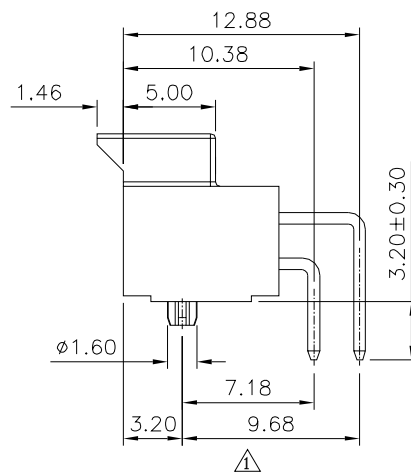
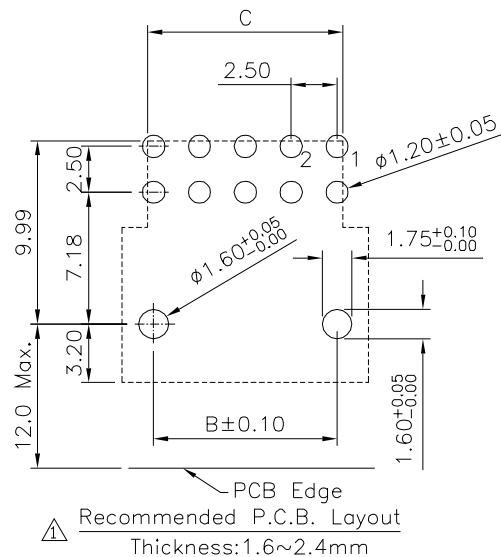
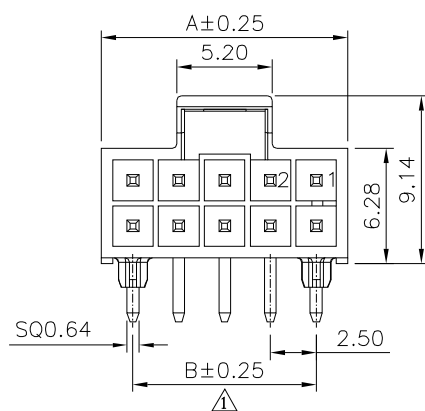




File No. 714PB26804 SHEET 1/2

SPECIFICATION
Current Rating:4A AC,DC
Voltage Rating:250V AC,DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
Housing:LCP(UL94V-0)
Contact:Brass,Tin Plated
RoHS Compliant

Key	A(Black)	Key B(Nature)	Pin	A	B	C
--	--	--	04	5.94	2.50	3.14
22988		22989	06	8.44	5.00	5.64
22986		22987	08	10.94	7.50	8.14
--		--	10	13.44	10.00	10.64
--		--	12	15.94	12.50	13.14
--		--	14	18.44	15.00	15.64
--		--	16	20.94	17.50	18.14

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22988

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee


REV.

A2


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X ±0.40
XX ±0.25
XXX ±0.15
ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	02/26/2025
A1		Modify Data	HZF	02/21/2025
A0		NEW RELEASE	HZF	02/18/2023

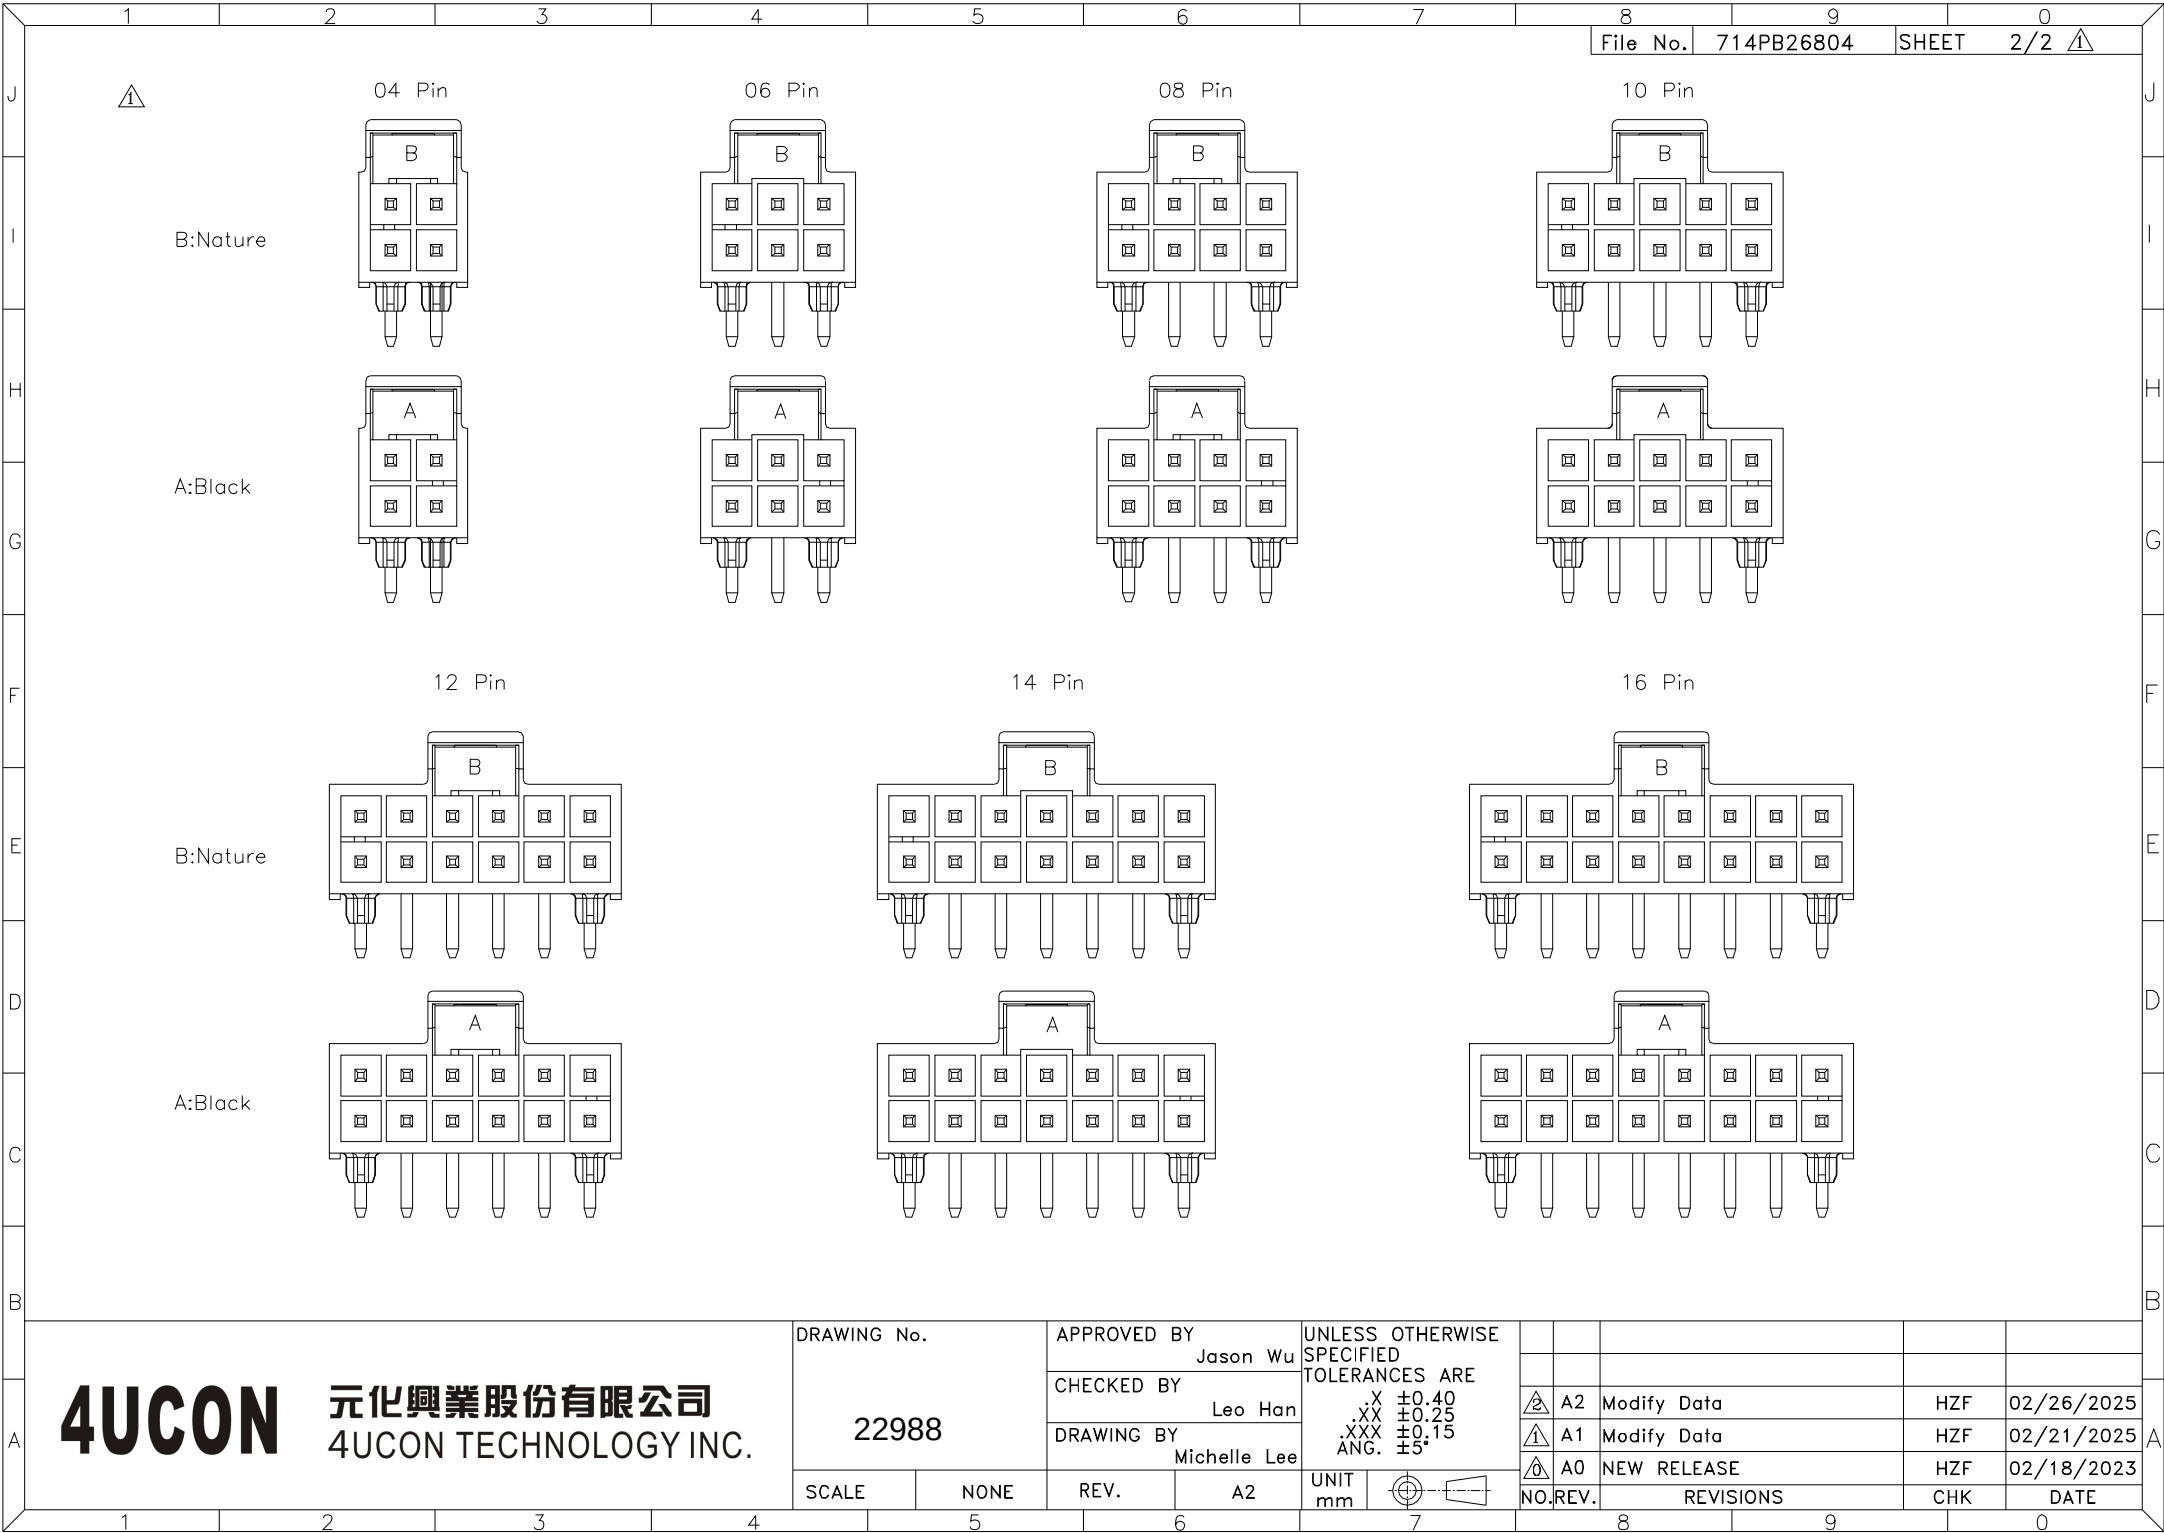

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.

22988

APPROVED BY
Jason Wu


CHECKED BY
Leo Han

DRAWING BY
Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X ± 0.40
XX ± 0.25
XXX ± 0.15
ANG. $\pm 5^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	02/26/2025
A1		Modify Data	HZF	02/21/2025
A0		NEW RELEASE	HZF	02/18/2023