


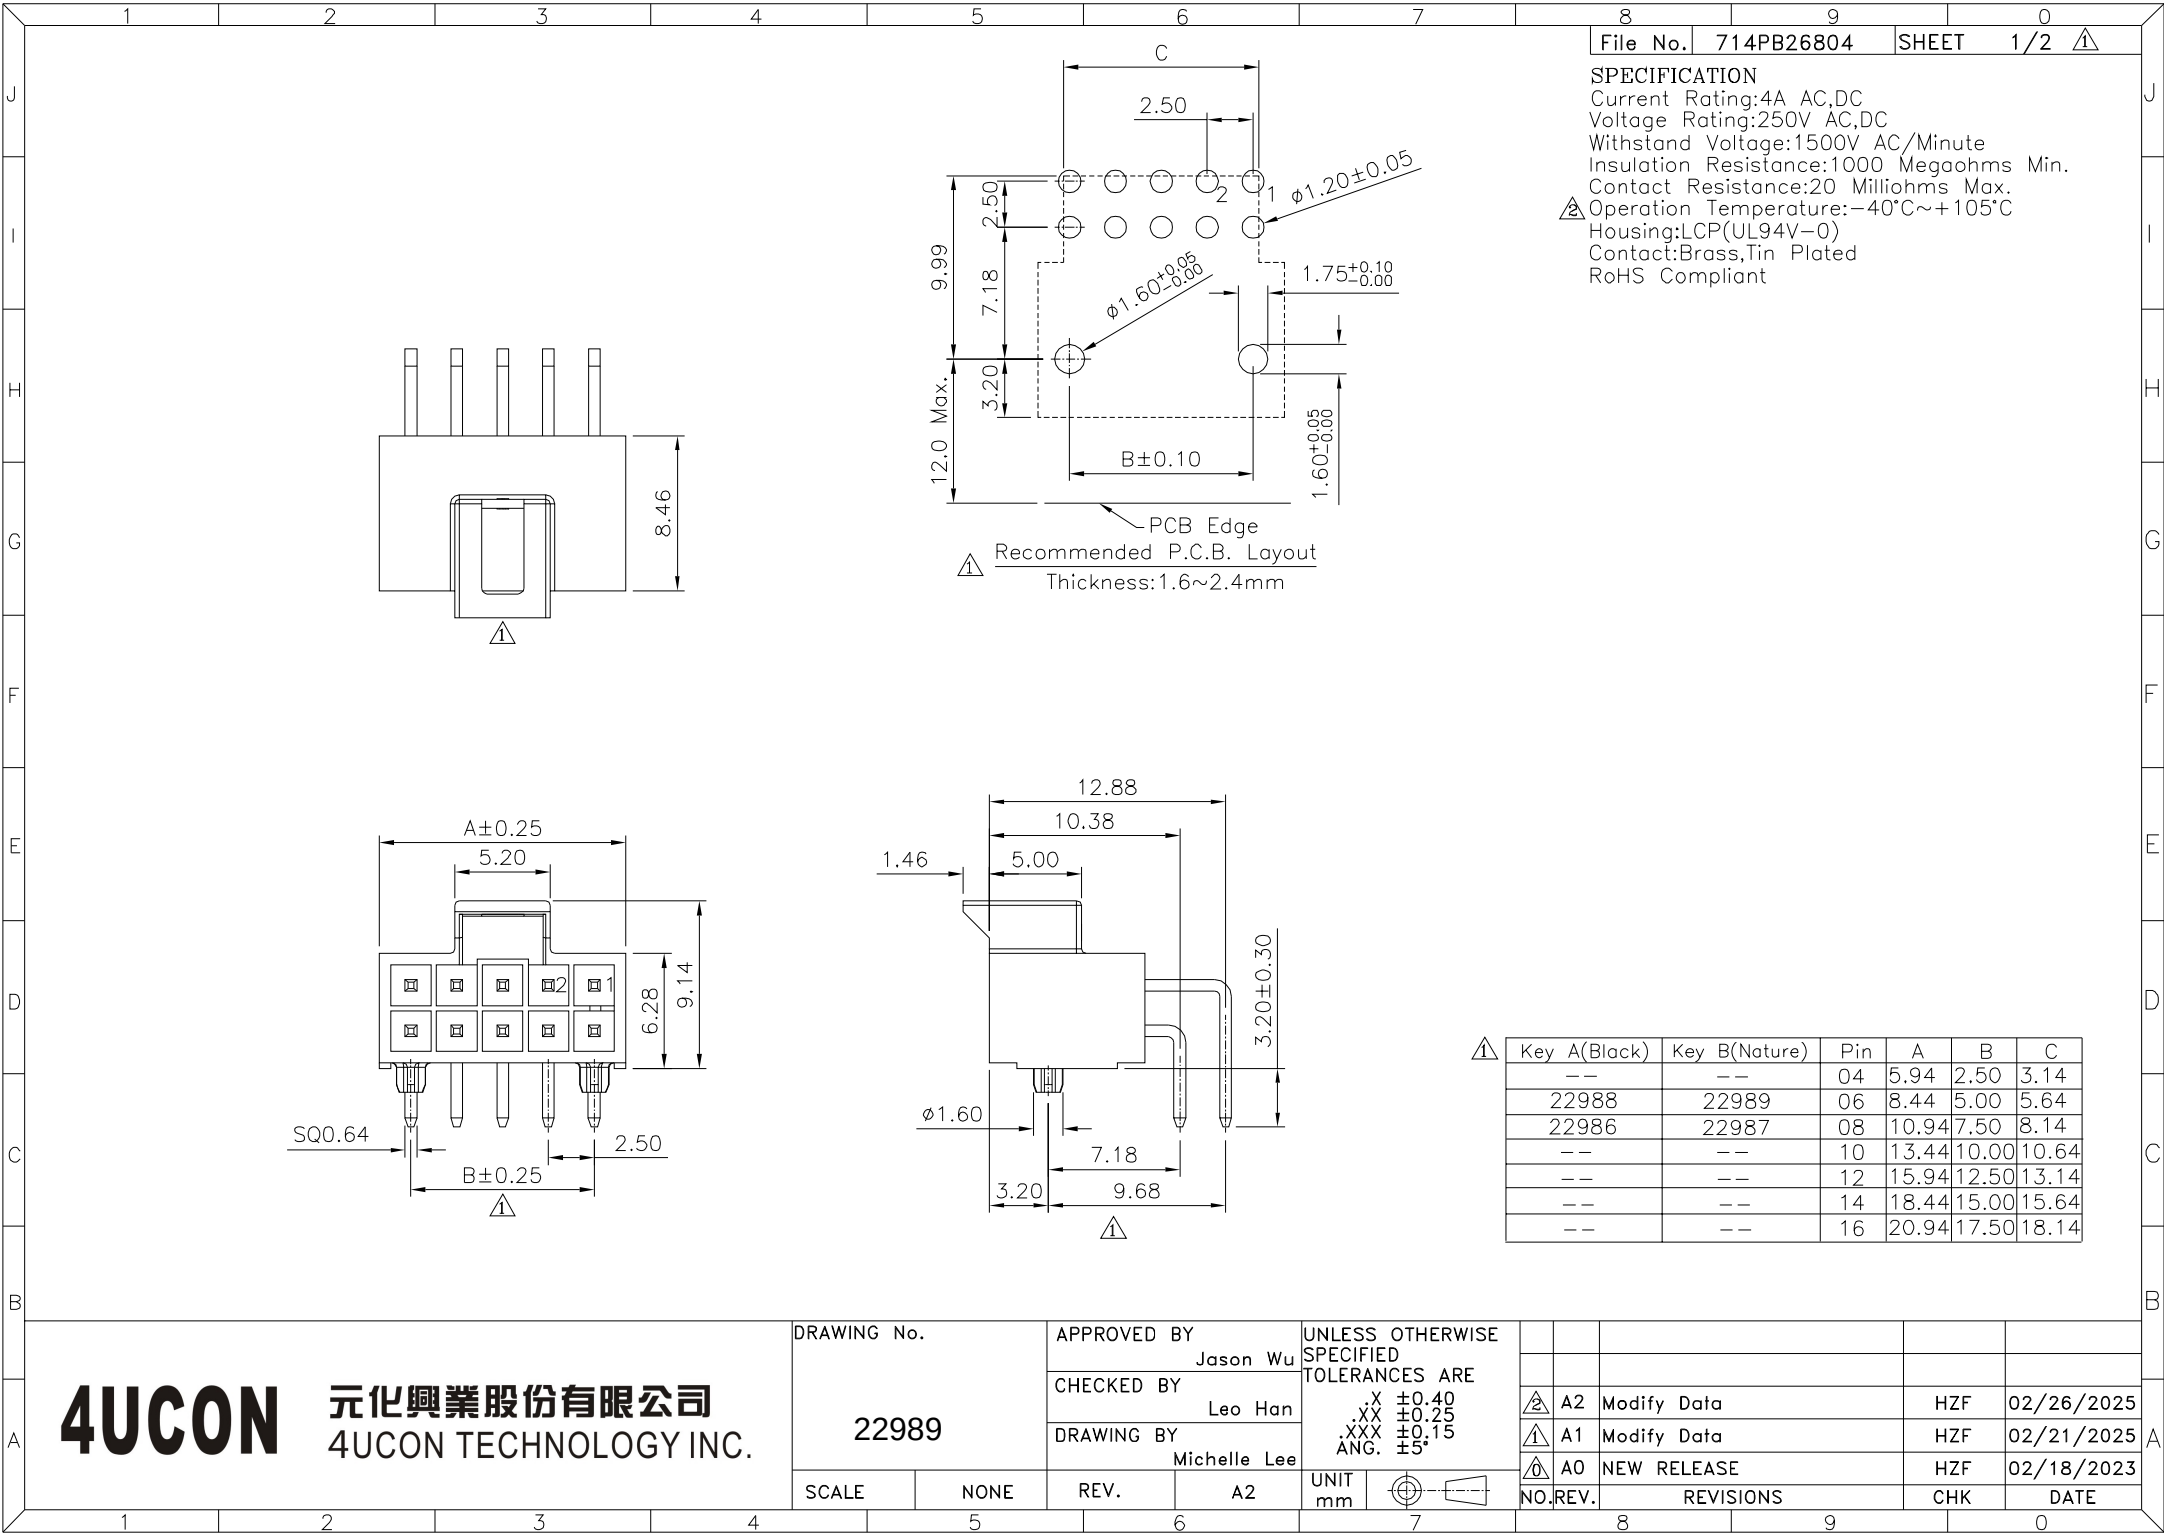

SPECIFICATION
Current Rating:4A AC,DC
Voltage Rating:250V AC,DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
⚠ Operation Temperature:-40°C~+105°C
Housing:LCP(UL94V-0)
Contact:Brass,Tin Plated
RoHS Compliant

⚠

Key	A(Black)	Key	B(Nature)	Pin	A	B	C
--	--	--	--	04	5.94	2.50	3.14
22988	22988	22989	06	8.44	5.00	5.64	
22986	22986	22987	08	10.94	7.50	8.14	
--	--	--	10	13.44	10.00	10.64	
--	--	--	12	15.94	12.50	13.14	
--	--	--	14	18.44	15.00	15.64	
--	--	--	16	20.94	17.50	18.14	

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.


DRAWING No.		APPROVED BY	
		Jason Wu	
		CHECKED BY	
		Leo Han	
		DRAWING BY	
		Michelle Lee	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X ±0.40					
XX ±0.25					
XXX ±0.15					
ANG. ±5°					
UNIT	mm				
NO.	REV.				
A2		Modify Data	HZF	02/26/2025	
A1		Modify Data	HZF	02/21/2025	
A0		NEW RELEASE	HZF	02/18/2023	
		REVISIONS	CHK	DATE	


	1	2	3	4	5	6	7	8	9	0
								File No.	714PB26804	SHEET 2/2 ⚠
J										
I										
H										
G										
F										
E										
D										
C										
B										
A										
	1	2	3	4	5	6	7	8	9	0




B:Nature




06 Pin







08 Pin




10 Pin



A:Black




12 Pin




B:Nature




14 Pin



16 Pin

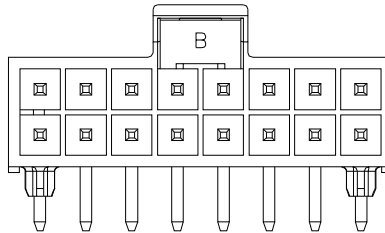

A:Black

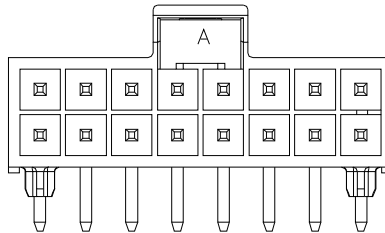

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22989

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X ±0.40
XX ±0.25
XXX ±0.15
ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
⚠	A2	Modify Data	HZF	02/26/2025
⚠	A1	Modify Data	HZF	02/21/2025
⚠	A0	NEW RELEASE	HZF	02/18/2023