
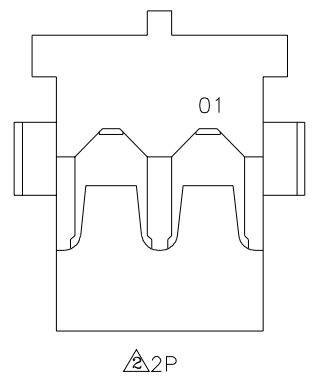
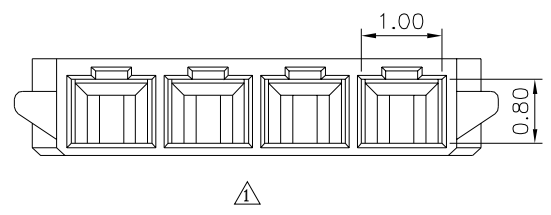



△△ SPECIFICATION

Current Rating:1.5A AC/DC  
 Voltage Rating:50V AC/DC  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:100 Megohms Min.  
 Temperature Range:-40°C~+105°C  
 Insulator:PA46(UL94V-0),Nature  
 RoHS Compliant

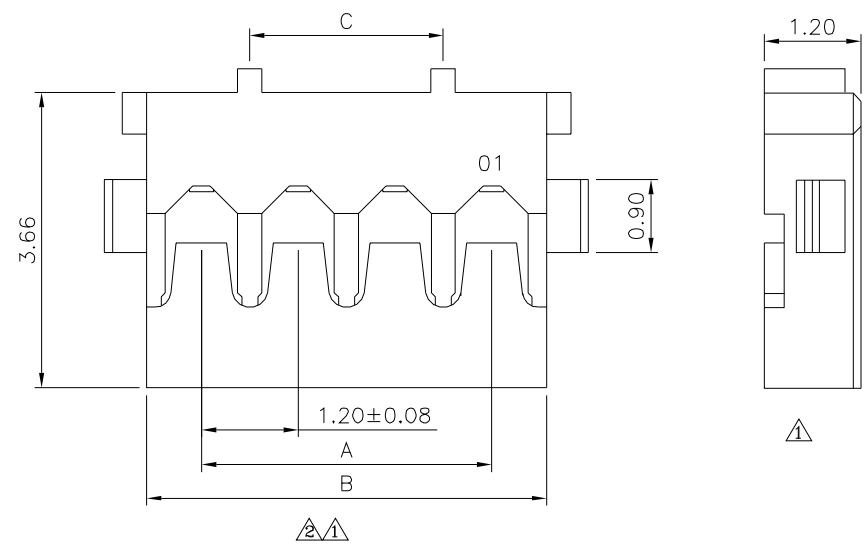

△△ Pin	A	B	C
02	1.20	2.60	—
03	2.40	3.80	1.20
04	3.60	5.00	2.40
05	4.80	6.20	3.60
06	6.00	7.40	4.80
07	7.20	8.60	6.00

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 23005

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 △ ANG. ±2°  
 UNIT mm

SCALE NONE REV. A2

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	11/04/2025
△ A1		Modify Data	HZF	04/26/2017
△ A0		NEW RELEASE	HZF	09/04/2015